

ENERIUM[®]

P O W E R M O N I T O R S



- Communication and programming via optical interface, or remotely via **Ethernet network** or RS485 output
- **Energy**: measurement on all 4 quadrants in class 0.5s according to IEC 62053-22
- Up to **8 load curves**
- Up to **4 trend curves**
- **Display of harmonics** by order
- **8 inputs / outputs** as required
- Up to **8 configurable alarms**
- **Log of last 64 events**
- Possibility of upgrading the embedded software via the **optical interface**
- **Graphic display** (Enerium 150 only): Fresnel diagram, harmonics in bargraph form, U, I and P displayed as gauges
- Version without display for mounting in cabinet

**ETHERNET
COMMUNICATION**

◆ The ENERIUM range comprises six power monitors, including two without a display.



Enerium 50

96 x 96 format

Harmonics up to 25th order
2 inputs or 2 outputs
8 load curves

742



Enerium 100/110

144 x 144 format

Harmonics up to 25th order
4 inputs/4 outputs
4 trend curves
Neutral current measurement

572

- Measurement of the 1s, min., max. and avg. values of the electrical quantities
- Energy metering in all 4 quadrants
- Measurement of harmonics by order up to the 25th order
- Measurement of THD-U, THD-V and THD-I, crest factor and composite voltage unbalance
- Measurement of $\cos \varphi$ and power factor
- Up to 8 configurable alarms each with 2 conditions (and, or)
- Recording of the last 64 overruns with time/date-stamping
- Energy management by recording 1 to 8 load curves chosen among 10 measured or calculated quantities: P+, P-, Q1, Q2, Q3, Q4, S+, S-, On-off1 and On-off2 (integration time 10 minutes to 60 minutes)
- 2 configurable inputs (metering, on-off)
- 2 configurable outputs (alarm, pulse or analogue: ± 20 mA)
- Communication
 - via optical interface
 - via RS485 link with ModBus protocol
 - via Ethernet with ModBus/TCP protocol
- 1 external synchronization input
- Software updating and upgrading via the optical interface (option)
- Large backlit: 10 x 128-pixel graphic screen
- Measurement on 400 Hz networks

- Measurement of the 1s, min., max. and avg. values of the electrical quantities
- Energy metering in all 4 quadrants
- Measurement of harmonics by order up to the 25th order
- Measurement of THD-U, THD-V and THD-I, crest factor and composite voltage unbalance
- Measurement of $\cos \varphi$ and power factor
- Up to 8 configurable alarms, each with 2 conditions (and, or)
- Recording of the last 64 overruns with time/date-stamping
- Memorization of trend curves (up to 4) with a recording interval of 1 second to 60 minutes
- 4 configurable inputs (metering, on-off)
- 4 configurable outputs (alarm, pulse or analogue: ± 20 mA)
- Communication :
 - via optical interface
 - via RS485 link with ModBus protocol
 - via Ethernet with ModBus/TCP protocol
- Software updating and upgrading via the optical interface (option)
- Wide 80 x 97 mm backlit screen
- Measurement on 400 Hz networks




Enerium 150

96 x 96 format

Harmonics up to 50th order
2 inputs or 2 outputs
8 load curves
4 trend curves
Graphs (Fresnel, bargraph, etc.)

772

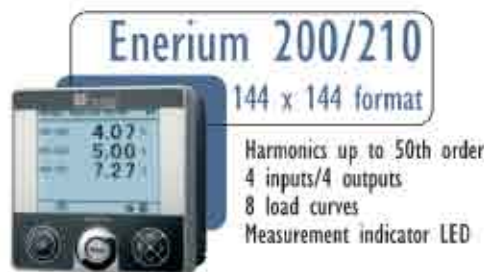

Enerium 200/210

144 x 144 format

Harmonics up to 50th order
4 inputs/4 outputs
8 load curves
Measurement indicator LED

772

- Same basic characteristics as the ENERIUM 50
- Measurement of harmonics up to 50th order
- Memorization of trend curves (up to 4) with a recording interval of 1 second to 60 minutes.
- Graphs
 - Fresnel diagram (network unbalance)
 - Bargraph of harmonics
 - U, I and P displayed as gauges

- Same basic characteristics as the ENERIUM 100/110
- Measurement of harmonics by order up to 50th order
- Energy management: by recording the load curves of 1 to 8 quantities chosen among 12 (P+, P-, Q1, Q2, Q3, Q4, S+, S-, On-off1, On-off2, On-off3, On-off4) with an adjustable integration period (34 days' recording with an integration period of 10 minutes, for example).



A version without a display (ENERIUM 110 and 210) for mounting on DIN rail or on a plate in a cabinet



An optical interface with 3 functions:
- Programming
- Verification
- Upgrading



An Ethernet output using the ModBus TCP protocol, an RS485 or ModBus/JBus protocol



Up to 8 configurable inputs (pulse, On-off, external synchronization) or outputs (pulse, analogue, On-off, alarms)



Measurement of earth-neutral voltage (with Enerium 100 and Enerium 200)

and its applications

- Whatever field you are working in, whether processing industries, infrastructures or tertiary production, you are affected by **energy efficiency** issues.

EXAMPLES OF APPLICATIONS

SCREENS

MAIN FEATURES


ENERGY MANAGEMENT

- **Measure all types of energy consumption** and check billing
- Control costs and **optimize consumption** according to applicable rate contracts
- **Allocate the costs** per work centre
- **Monitor active power consumption** trends
- **Class 0.5s** (IEC 62053-22)
- Up to **8 configurable inputs/outputs** for multi-energy measurement



MONITORING

- **Monitor** the functional parameters in real time and remotely
- **Record all the essential electrical parameters** of an installation
- **Measure and analyse drift** to avoid operating losses
- **Manage alarms remotely**, analyse the event log and verify circuit-breaker status
- Measure U and I with **±0.2% accuracy**





SIZING

- Assess the possibility of **adding loads to a network** or modifying a production process
- Define **reactive energy compensation requirements**: reduced penalties, increase in available active energy depending on long process variations
- Find out the transformer's load rate
- Simultaneously **record 4 trend curves** chosen among 12 quantities measured or calculated by the product.



QUALITY

- **Investigate** the possible causes of **dysfunction** linked to harmonics
- **Evaluate** the way electrical equipment ages
- Assess distorting power due to harmonics
- **Measure the harmonics** per order and per phase:
 - phase-to-earth and phase-to-phase voltage
 - current up to **order 50** (25 for Enerium 100/110)



- **Load curves** for each type of energy measured
- Automatic reconstitution of **total consumption index**

- Measure energy in **all 4 quadrants in class 0.5s**
- **Measure the earth-neutral voltage**
- **Display and record** instant, minimum, maximum, average minimum and average maximum values
- **8 alarms** with "and" or "or" conditions
- **Log of last 64 events**
- **Verify correct wiring order**
- **Monitor electrical network balance**
- Monitor alarm status locally (flashing on screen)

- Measure and record the **cos φ and power factor** per phase (average and instantaneous in all 4 quadrants)

- Measure **THD-U, THD-V** and **THD-I**
- Measure the **unbalance**

Special features

	ENERIUM 50	ENERIUM 100	ENERIUM 110	ENERIUM 150	ENERIUM 200	ENERIUM 210
Measurements						
Format	96 x 96 mm	144 x 144 mm	144 x 144 mm	96 x 96 mm	144 x 144 mm	144 x 144 mm
Graphic LCD screen	x	x	without display	x	x	without display
Neutral current	calculated	measured	measured	calculated	measured	measured
Harmonics	25th order	25th order	25th order	50th order	50th order	50th order
tan φ	x	-	-	x	-	-
Inputs (option)						
Number	2	4		2	4	
Type	alarm, pulse, analogue					
Outputs (option)						
Number	2	4		2	4	
Type	alarm, impulsion, analogue					
Input/output cards						
Option cards	1	4		1	4	
Curves						
Load curves	8	-	-		8	
Trend curves	-	4			4	
Communication interface						
Optical	front	front and rear		front	front and rear	
Ethernet or RS 485	x	x	x	x	x	x
Measurement indicator LED	-	x	x	-	x	x
Graphics						
Fresnel	-	-	-	x	-	-
Gauges	-	-	-	x	-	-
Bargraph	-	-	-	x	-	-

General specifications

	T S	MIN	MAX	AVG	AVG MIN	AVG MAX
V1, V2, V3, Vearth	*	*	*	*		*
U12, U23, U31	*	*	*	*		*
I1, I2, I3, In	*	*	*	*		*
P1, P2, P3	*		▲(1)	▲(1)		
Pe	*	▲(1)	▲(1)	▲(1)		▲(1)
Q1, Q2, Q3	*		▲(1)	▲(1)		
Qt	*	▲(1)	▲(1)	▲(1)		▲(1)
S1, S2, S3	*		*	*		
Se	*		*	*		*
FP1, FP2, FP3	*			▲(1)		
FPe	*			▲(1)	▲(1)	▲(1)
cos φ 1, cos φ 2, cos φ 3	*			▲(1)		
cos φ t	*			▲(1)	▲(1)	▲(1)
tan φ	*					
Frequency	*	*	*	*		
Crest factor V1, V2, V3	*			*		*
Crest factor I1, I2, I3	*			*		*
V unbalance	*			*		*
Harmonics (1) 0 to 50 V1, V2, V3, U12, U23, U31, I1, I2, I3	*					*
THD V1, V2, U12, U23, U31, I1, I3	*			*		*
3 hour meters: network presence, under load, auxiliary source	*					
Active energy - receiver, generator	*					
Reactive energy Qcad1, Qcad2, Qcad3, Qcad4	*					
Reactive energy - receiver, generator	*					
Measuring pulse input A1, A2, B1, B2, C1, C2, D1, D2	*					

(1) Measurement also possible in generator and receiver modes (2) Up to 25th order with ENERIUM 50/100/110

Voltage inputs	
Measurement range	10 to 120 % of V_n when $V_n = 230$ V (ph-N) 10 to 120 % of U_n when $U_n = 400$ V (ph-ph)
Frequency	50/60Hz or 400Hz
Max. composite voltage measured	450 kV
Admissible overvoltage	800 V during 24 hours 552 V permanent
Consumption	< 0.1 VA
Input impedance	2 M Ω (500 k Ω on EMERUM 50/150)
Current inputs	
Measurement range	5 to 130 % of I_n when $I_n = 5$ A
CT secondary (I_n)	1 to 5 A
Max. current measured	25,000 A
Admissible overload	6.5 A permanent 250 A for 1 second, 5 times every 5 minutes
Consumption	< 0.15 VA
Digital inputs (on-off or metering pulse)	
Operating voltage	24 to 60 Vdc \pm 20 %
Minimum signal width	30 ms
Consumption	< 0.5 W
Auxiliary power supply	
Power supply	80 to 276 Vac / 80 to 264 Vdc (< 15 VA) 19.2 to 57 Vdc *
Multiple measurements (accuracy)	
Current I	\pm 0.2 % from 5 to 130 % of I_n
Voltage U or V	\pm 0.2 % from 10 to 120 % of U_n/V_n
Active power P	\pm 0.5 %
Reactive power Q	\pm 1 %
Apparent power S	\pm 0.5 %
Frequency F	\pm 0.1 Hz from 42.5 to 49 Hz
Power factor FP and cos φ	\pm 0.02 counts when 0.5 inductive < FP > 0.5 capacitive \pm 0.05 counts when 0.2 inductive < FP > 0.2 capacitive
Sampling rate	6.4 KHz to 50 Hz - measurement without sample loss (0 blind)
Metering (accuracy)	
Active energy	Class 0.5s according to IEC 62053-22
Reactive energy	Class 2 according to 62053-23
Apparent energy	\pm 0.5 %
Qualimetry (accuracy)	
THD-I, THD-U and THD-V	\pm 0.5 counts
Order by order, U, V, I	\pm 0.5 counts
Pulse outputs or alarm relays	
Type	static relay
Operating voltage	24 to 110 Vdc \pm 20 % 24 to 115 Vac - 10 % + 15 %
Max. current	100 mA
Compliant with standard	CEI 62053-31
Analogue output	
Scale	configurable between - 20 mA and + 20 mA
Admissible load	500 W, 10 V/I output
Response time	< 500 ms
RS-485 output	
Connection	2 wires, half-duplex
Protocol	Modbus/RTU
Speed (configurable)	2,400, 4,800, 9,600, 19,200, 38,400 (115,200 EMERUM 50/150)
Parity	even, odd or none
Ibus addresses	1 to 247
Ethernet output	
Type	RJ45 8-pin connector
Protocol	Modbus/TCP
Speed (configurable)	Compatible with 10baseT

* available as an option

Environmental specifications

Climatic specifications	
Operating temperature	-10 °C to +55 °C
Humidity during operation	95% at 40°C
Storage temperature	-25°C to +70°C
Safety specifications	
Pollution degree	2
Fire resistance	UL94, severity V1
Installation category	3
Mechanical characteristics	
Ingress protection	front panel IP51 - rear IP20
Mechanical shocks	IEC 61010-1
Vibrations	IEC 60068-2-6 (method A)
Free fall with packaging	MF H 0842-1
Electromagnetic compatibility	
Generic standard	IEC 61326-1

Mechanical specifications

Weight	850g (EMERUM 100/200) 700g (EMERUM 110/210) 600g (EMERUM 50/150)
Mounting	DIN 43700 (EMERUM 50/100/150/200)
Format	DIN 96x96 (EMERUM 50/150) & DIN 144x144 (EMERUM 100/110/200/210)
Connection	screw-lock terminal strip for direct rigid or flexible wires on current measurement inputs and 2.5mm ² for the other accesses

Trend curves

TS VALUES	
U, I, I ₃ , I _n	*
P _t	*
Q _t	*
S _t	*
FP _t	*
U imbalance	*
THD U ₁ , U ₂ , U ₃	*
THD U ₁₂ , U ₂₃ , U ₃₁	*
THD I ₁ , I ₂ , I ₃	*
AVERAGE VALUES	
U ₁ , U ₂ , U ₃	*
I ₁ , I ₂ , I ₃ , I _n	*
P ₁ Gen, P ₁ Rec, P ₂ Gen, P ₂ Rec, P ₃ Gen, P ₃ Rec, P _t Gen, P _t Rec	*
FP ₁ Gen, FP ₁ Rec, FP ₂ Gen, FP ₂ Rec, FP ₃ Gen, FP ₃ Rec, FP _t Gen, FP _t Rec	*
Co _s φ ₁ Rec, Co _s φ ₁ Gen, Co _s φ ₂ Rec, Co _s φ ₂ Gen, Co _s φ ₃ Rec, Co _s φ ₃ Gen, Co _s φ ₃ Gen, Co _s φ ₃ Rec	*
Frequency	*
Crest factor U ₁ , U ₂ , U ₃	*
Crest factor I ₁ , I ₂ , I ₃	*
THD U ₁₂ , U ₂₃ , U ₃₁	*
THD I ₁ , I ₂ , I ₃	*
THD I ₁ , I ₂ , I ₃	*
THD U ₁ , U ₂ , U ₃	*


Load curves

AVERAGE VALUES	
P _t Gen, P _t Rec	*
Q _{rad1} , Q _{rad2} , Q _{rad3} , Q _{rad4}	*
S _t Gen, S _t Rec	*
Inputs: On-off1, On-off2, On-off3, On-off4	*


Connection configurations

ENERIUM 50/150


Unbalanced 3-phase, 3 wires + 3 CTs




Unbalanced 3-phase, 3 wires + 2 CTs



Unbalanced 3-phase, 4 wires + 3 CTs




Single-phase connection




ENERIUM 100/110 - ENERIUM 200/210


Unbalanced 3-phase, 4 wires + 4 CTs




Single-phase connection, 2 wires + 1 CT



Unbalanced 3-phase, 3 wires + 3 CTs



Unbalanced 3-phase, 4 wires + 3 CTs



Other configurations are possible: please contact us

Alarms


TS VALUES	
V ₁ , V ₂ , V ₃ , V _{earth}	*
U ₁₂ , U ₂₃ , U ₃₁	*
I ₁ , I ₂ , I ₃ , I _n	*
P _t	*
Q _t	*
S _t	*
FP _t	*
Co _s φ	*
Frequency	*
U imbalance	*
3 hour reset : network presence, under load, auxiliary source	*
AVERAGE VALUES	
P _t Gen, P _t Rec	*
Q _t Gen, Q _t Rec	*
S _t	*

Analogues outputs (option)

TS VALUES	
V ₁ , V ₂ , V ₃ , V _{earth}	*
U ₁₂ , U ₂₃ , U ₃₁	*
I ₁ , I ₂ , I ₃ , I _n	*
P ₁ , P ₂ , P ₃	*
P _t	*
Q ₁ , Q ₂ , Q ₃	*
Q _t	*
S ₁ , S ₂ , S ₃	*
S _t	*
FP ₁ , FP ₂ , FP ₃	*
FP _t	*
Co _s φ ₁ , Co _s φ ₂ , Co _s φ ₃	*
Co _s φ	*
Frequency	*

To order

Dimensions

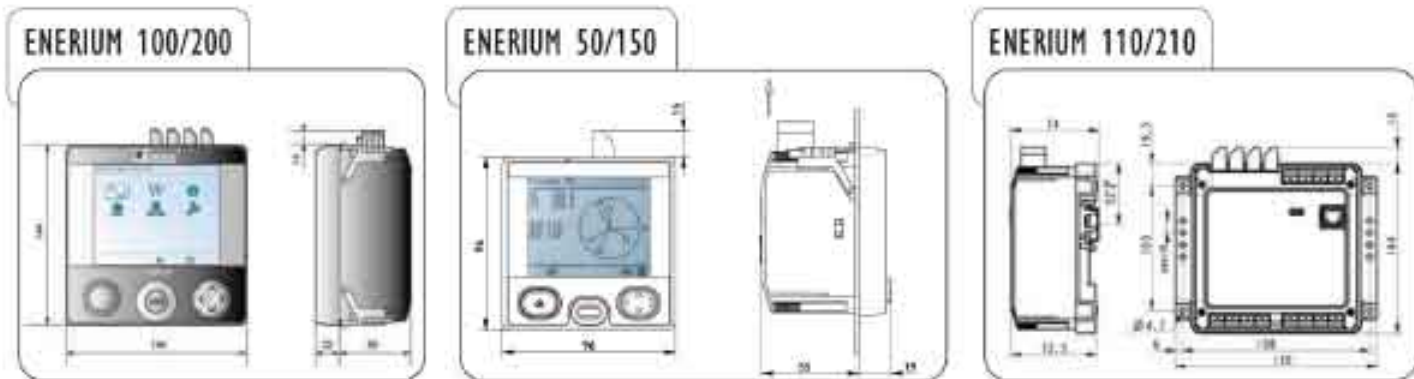

Standard product

Model	Frequency	Power supply	Communication	Metering input	On-off outputs	Analogue outputs	Reference
ENERIUM 100	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	RS485	0	0	0	P01330801
ENERIUM 100	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	RS485	2	2	0	P01330802
ENERIUM 200	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	Ethernet	4	2	0	P01330803
ENERIUM 200	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	RS485	2	2	2	P01330804
ENERIUM 50	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	RS485	0	0	0	P01330805
ENERIUM 50	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	Ethernet	0	0	0	P01330806
ENERIUM 50	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	RS485	1	1	0	P01330807
ENERIUM 50	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	Ethernet	1	1	0	P01330808
ENERIUM 150	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	RS485	0	0	0	P01330809
ENERIUM 150	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	Ethernet	0	0	0	P01330810
ENERIUM 150	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	RS485	0	2	0	P01330811
ENERIUM 150	50/60 HZ	80 to 265 Vac / 80 to 264 Vdc	Ethernet	0	2	0	P01330812

Configured product

ENERIUM 1 2 3 4 5 6 7

- Model**
 - 50: metering - with display
 - 100: metering - network monitoring + installation sizing - with display
 - 110: metering - network monitoring + installation sizing - without display
 - 150: metering - supervision - with display
 - 200: metering - network monitoring + multi-energy management - with display
 - 210: metering - network monitoring + multi-energy management - without display
- Frequency of network measured :**
 - 0: 50/60Hz
 - 1: 400Hz
- Power supply**
 - 0: de 80 à 265 Vac / de 80 à 264 Vdc
 - 1: de 19.2 à 58 Vdc
- Communication**
 - 0: RS485
 - 1: Ethernet
- Metering (or on-off) inputs**
 - 0: none
 - 1: 1 input (ENERIUM 50/150 only)
 - 2: 2 inputs
 - 4: 4 inputs (not available for ENERIUM 50/150)
- On-off outputs**
 - 0: none
 - 1: 1 output (ENERIUM 50/150 only)
 - 2: 2 outputs
 - 4: 4 outputs (not available for ENERIUM 50/150)
- Analogue outputs**
 - 0: none
 - 2: 2 outputs


ACCESSORIES:

Optical interface for ENERIUM 50/150	P01330403
Optical interface for ENERIUM 100/110 - 200/210	P01330401
E.set software	P01330501
E.view software	P01330601
E.view+ software	P01330610

Attention, for choices 5, 6 and 7, the maximum possible number of inputs and/or outputs is 8 (ENERIUM 100-110/200-210).
Attention, for EneriUM 50/150, choices 5 and 6 only allow the following combinations: 0-0, 1-1, 2-0, 0-2.

Example: EneriUM 200, frequency 50/60 Hz, auxiliary power supply 24 Vdc, RS485 communication, no outputs and 2 On-off inputs => order ENERIUM 200 010200
• 1-200 • 2-0 • 3-1 • 4-0 • 5-2 • 6-0 • 7-0

ENERIUM is also a global solution with its associated **software**: configuration, installation diagnosis and display.

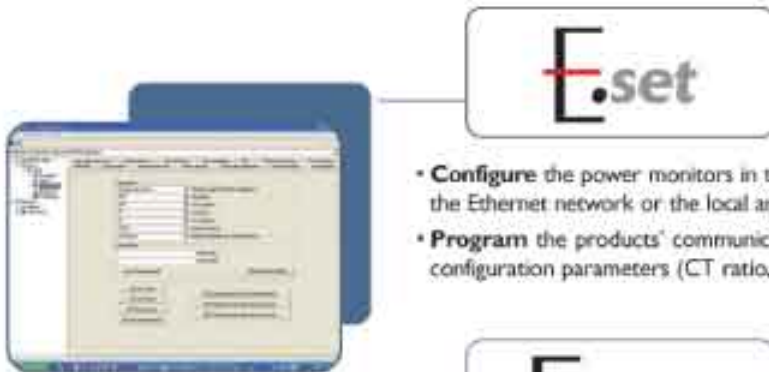

E.set

- **Configure** the power monitors in the ENERIUM range **remotely** via the RS485 network, the Ethernet network or the local area network using the optical interface
- **Program** the products' communication parameters (address, speed, parity, etc.) and the configuration parameters (CT ratio, PT, alarm thresholds, etc.)

E.view

- **Control** the inputs and outputs of the power monitors in the ENERIUM range remotely
- **Display** the basic electrical parameters
- **Retrieve** the recordings of the load curves and trend curves, as well as the alarm log (format .cs, .xls, .txt).



E.view+

- The same functions as the E.view software with additional **tables, bargraphs and curves**.



Functionalities	E.Set	E.view	E.view+
Description	•	•	•
Status	•	•	•
Configuration	•	•	•
Diagnosis		•	•
Display		•	•
Graphics			•

T O O R D E R

Model	Reference
E.Set software	P01330501
E.View software	P01330601
E.View+ software	P01330610