





Switch disconnecter for solar application according to IEC 60947-3 by KEMA



Terminals Scheme							
Layer No.	Front Side		Symbol	Rear Side		On Positions	
	Left	Right		Left	Right	1	2 3 4
4	+2			+2		X	
3		-2			-2	X	
2	-1			-1		X	
1		+1			+1	X	

Contacts are made in "X" marked position.
Symbols for interconnection: [

Technical data	Symbol	Unit	Value
nominal voltage (DC poles)	Ue	V dc	1000
nominal current (DC poles)	Ie	A dc	16
nominal voltage (second rating DC poles, if requested)	Ue	V dc	0
nominal current (second rating DC poles, if requested)	Ie	A dc	0
method of mounting			reverse single hole mounting IP65 [R] terminals access from bottom side
number of DC poles			4
utilization category DC	DC-21B		
actuator			standard black [A]
positions			OFF at 12 hr, ON at 3 hr [E]
rated impulse withstand voltage	Uimp	kV	8
insulation voltage	Ui	V	1000
rated thermal current uninterrupted duty	Iu	A	16
rated short-time withstand current (1s)	Icw	A	750
rated short-circuit making capacity	Icm	kA	1,4
rated conditional short-circuit current		kA	5
max power dissipation		W	1,4
method of operation			independent manual operation
minimum required dimensions of enclosures L x W x H*		mm	124 x 47 x 74
* see the drawing for the height of the switch. The number of layers N is:			4
tightening torque terminal screws M4 , min. - max.		Nm	1,2 - 1,3
tightening torque panel mounting nut, min. - max.		Nm	2,0 - 2,5
tightening torque M3 screw in the standard black knob, min. - max.		Nm	0,5 - 0,7
minimum required fine wire cross-section: IEC60947-1, table 9		mm ²	2,5
ambient temperature allowed between		°C	- 20 to + 70 °C
storage temperature allowed between		°C	- 40 to + 80 °C
maximum relative humidity, without condensation at 20 °C		%	90
pollution degree			2
IP rating terminals			IP20
IP rating gland of the shaft in case of single hole panel mounting			
nominal voltage (AC poles)	Ue	V ac	
nominal current (AC poles)	Ie	A ac	
number of AC poles			
auxiliary contact:			No auxiliary contact
weight		g	221
accessories:			-

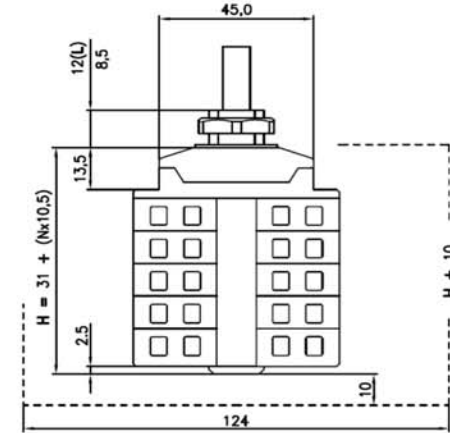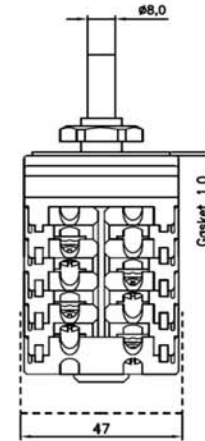

Mounting instructions

In the application all ratings have to be respected. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards. The terminals, without interconnection can take copper wires up to 6 mm². The recommended Spade Tongue Terminals may have a maximum width of 9 mm. For CSA and UL applications, registered Spade Tongue Terminals must be used. The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco). After mounting, the wiring must be checked and the switch must operate smoothly.

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.


A type knob



D type knob



B type knob



O type knob



Dimensions, specifications and data shown could be subject to change without notice.