
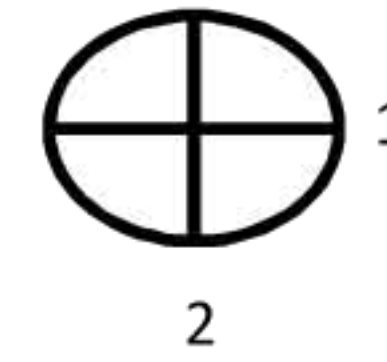


SANTON X-TYPE SWITCH:

X100.25P4M-A




Switch disconnecter for solar application according to IEC 60947-3 by KEMA and CCC,

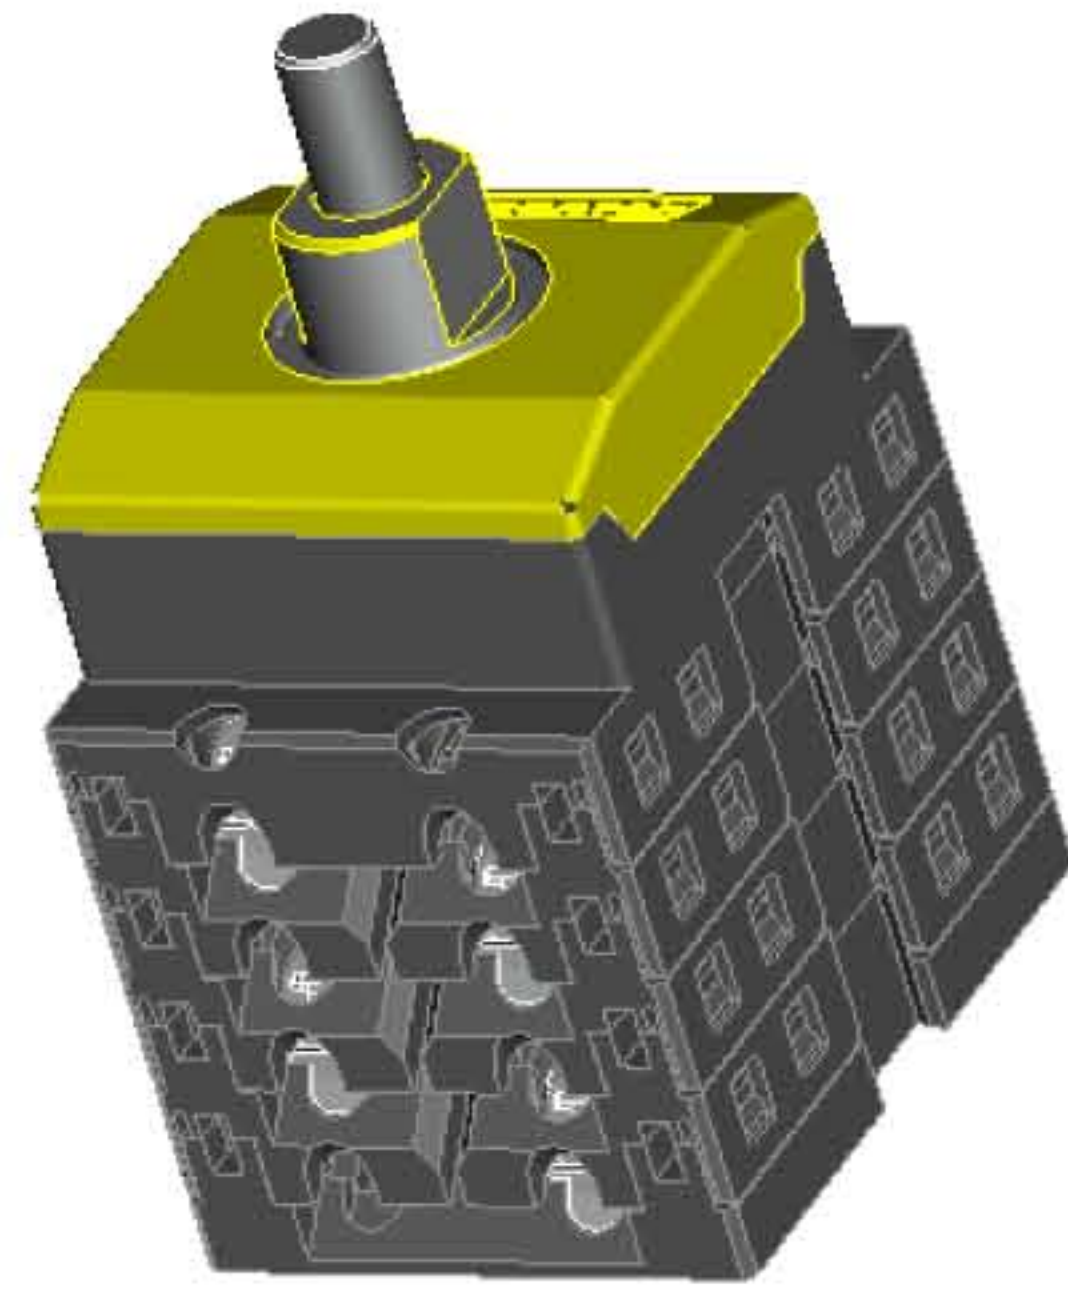

Terminals Scheme										
Layer No.	Front Side		Symbol	Rear Side		On Positions				
	Left	Right		Left	Right	1	2	3	4	
6	+2			+2						X
5		+2			+2					X
4	-2			-2						X
3		-1			-1					X
2	+1			+1						X
1		+1			+1					X

Contacts are made in "X" marked position.
Symbols for interconnection: [

Technical data	Symbol	Unit	Value
nominal voltage (DC poles)	Ue	V dc	1000
nominal current (DC poles)	Ie	A dc	25
nominal voltage (second rating DC poles, if requested)	Ue	V dc	0
nominal current (second rating DC poles, if requested)	Ie	A dc	0
method of mounting	single hole mounting IP65 [P]		
number of DC poles			4
utilization category DC	DC-21B		
actuator			
positions	OFF at 3 hr, ON at 6 hr [M]		
rated impulse withstand voltage	Uimp	kV	8
insulation voltage	Ui	V	1000
rated thermal current uninterrupted duty	Iu	A	25
rated short-time withstand current (1s)	Icw	A	750
rated short-circuit making capacity	Icm	kA	1,4
rated conditional short-circuit current		kA	5
max power dissipation		W	5,3
method of operation	independent manual operation		
minimum required dimensions of enclosures l x w x h*		mm	124 x 47 x 95
* see the drawing for the height of the switch. The number of layers H is:	6		
tightening torque terminal screws M4, min. - max.		Nm	1,5 - 1,7
tightening torque panel mounting nut, min. - max.		Nm	2,0 - 2,5
tightening torque M3 screw in the standard black knob, min. - max.		Nm	0,5 - 0,7
minimum required fine wire cross-section: IEC60947-1, table 9		mm ²	4
ambient temperature allowed between		°C	- 20 to + 70 °C
storage temperature allowed between		°C	- 40 to + 80 °C
maximum relative humidity, without condensation at 20 °C		%	90
pollution degree			2
IP rating terminals			IP20
IP rating gland of the shaft in case of single hole panel mounting			
nominal voltage (AC poles)	Ue	V ac	
nominal current (AC poles)	Ie	A ac	
number of AC poles			
auxiliary contact, nominal current 16A at 250 V, AC15	No auxiliary contact		
weight		g	284
accessories:			-

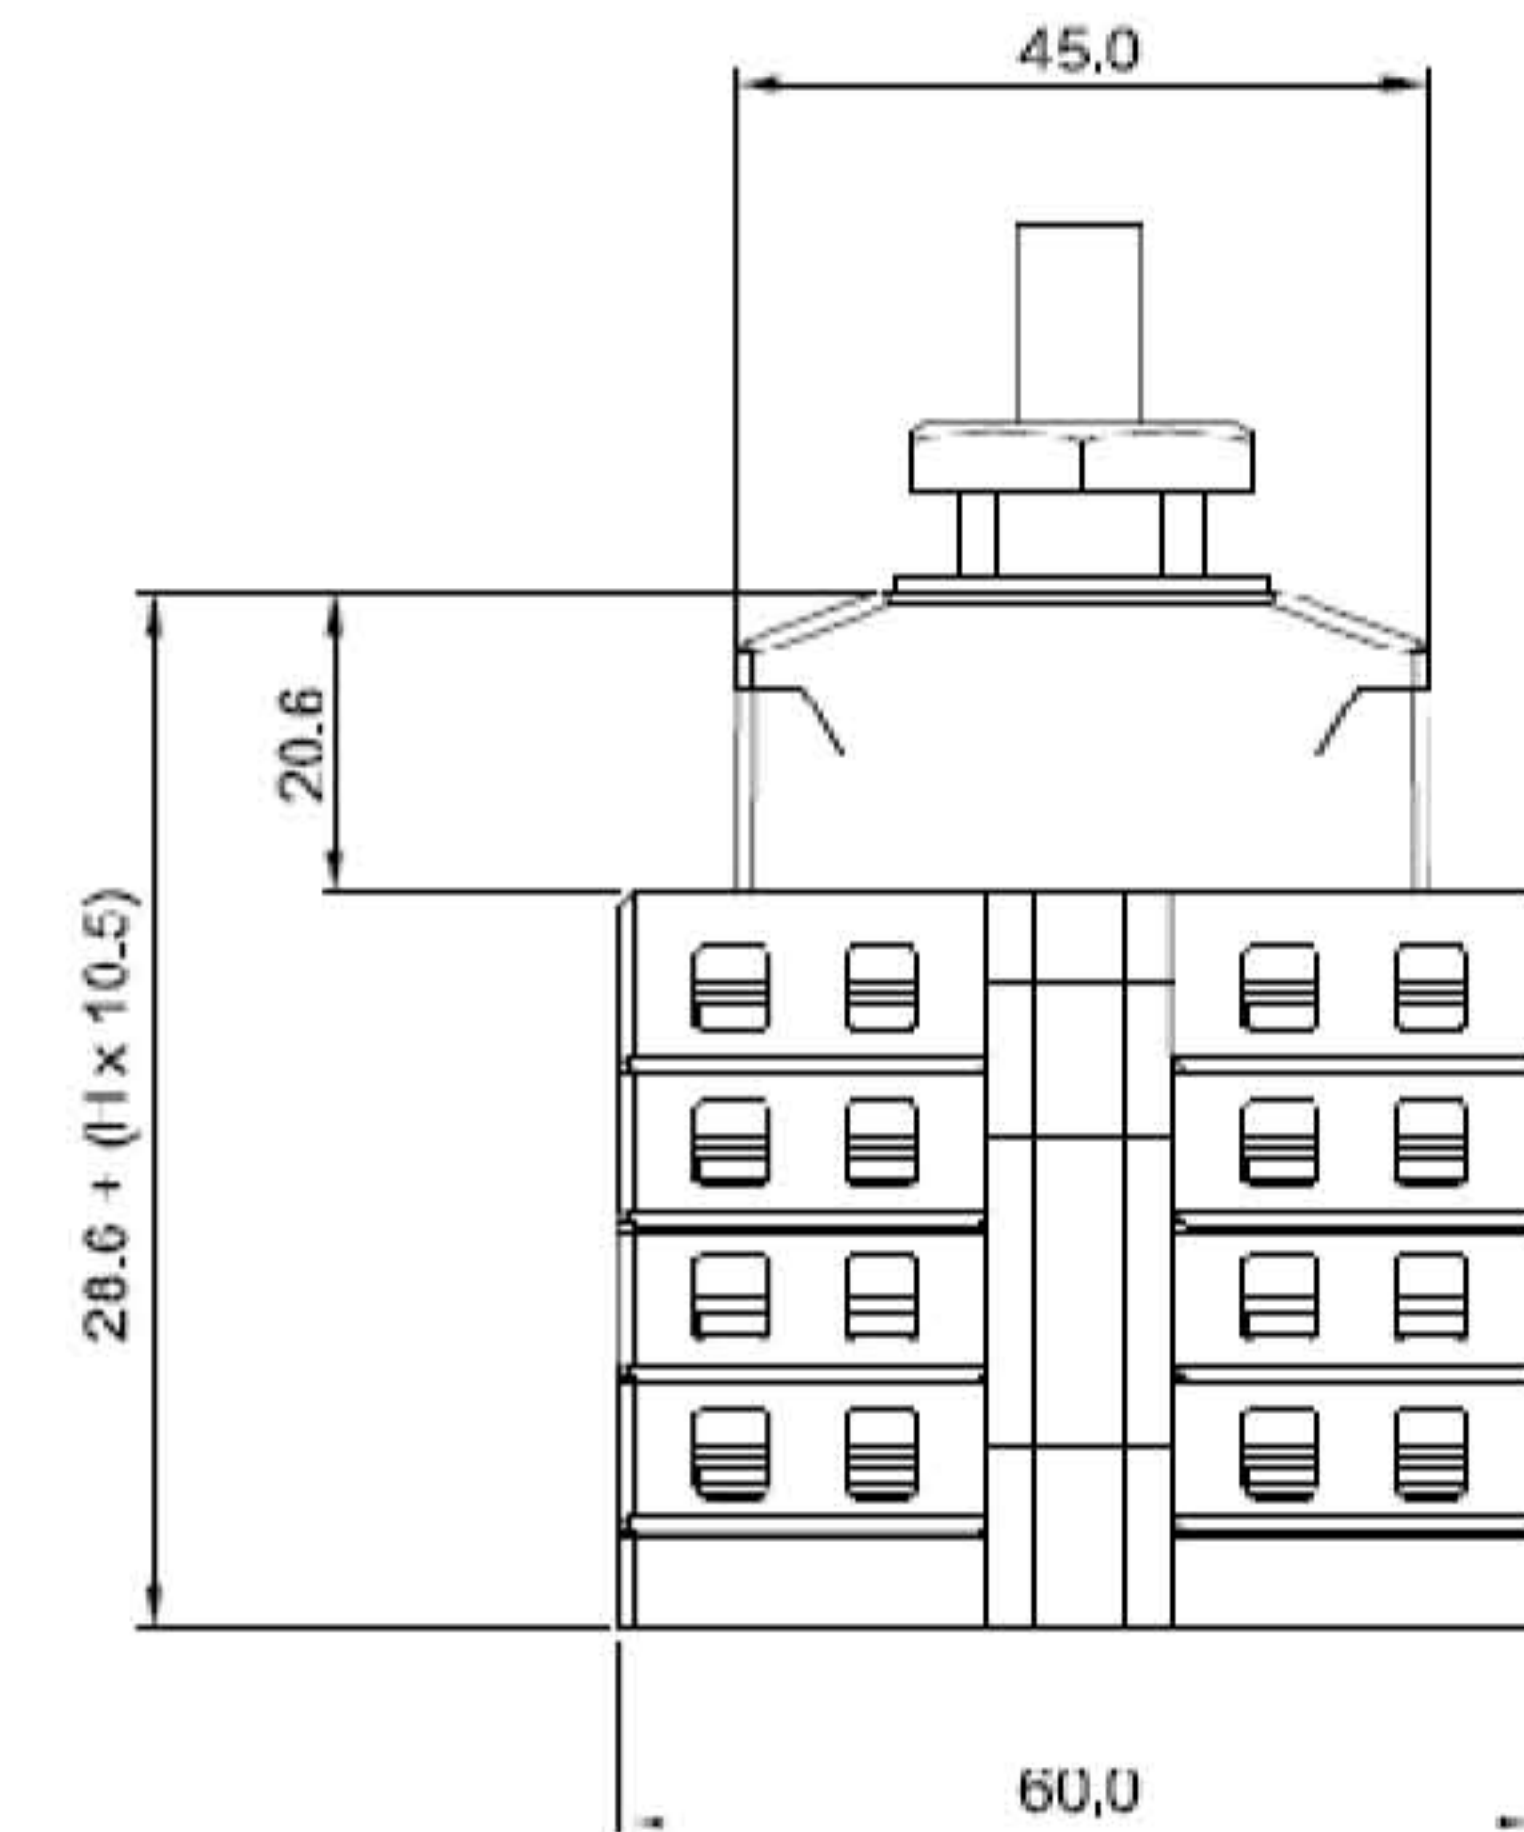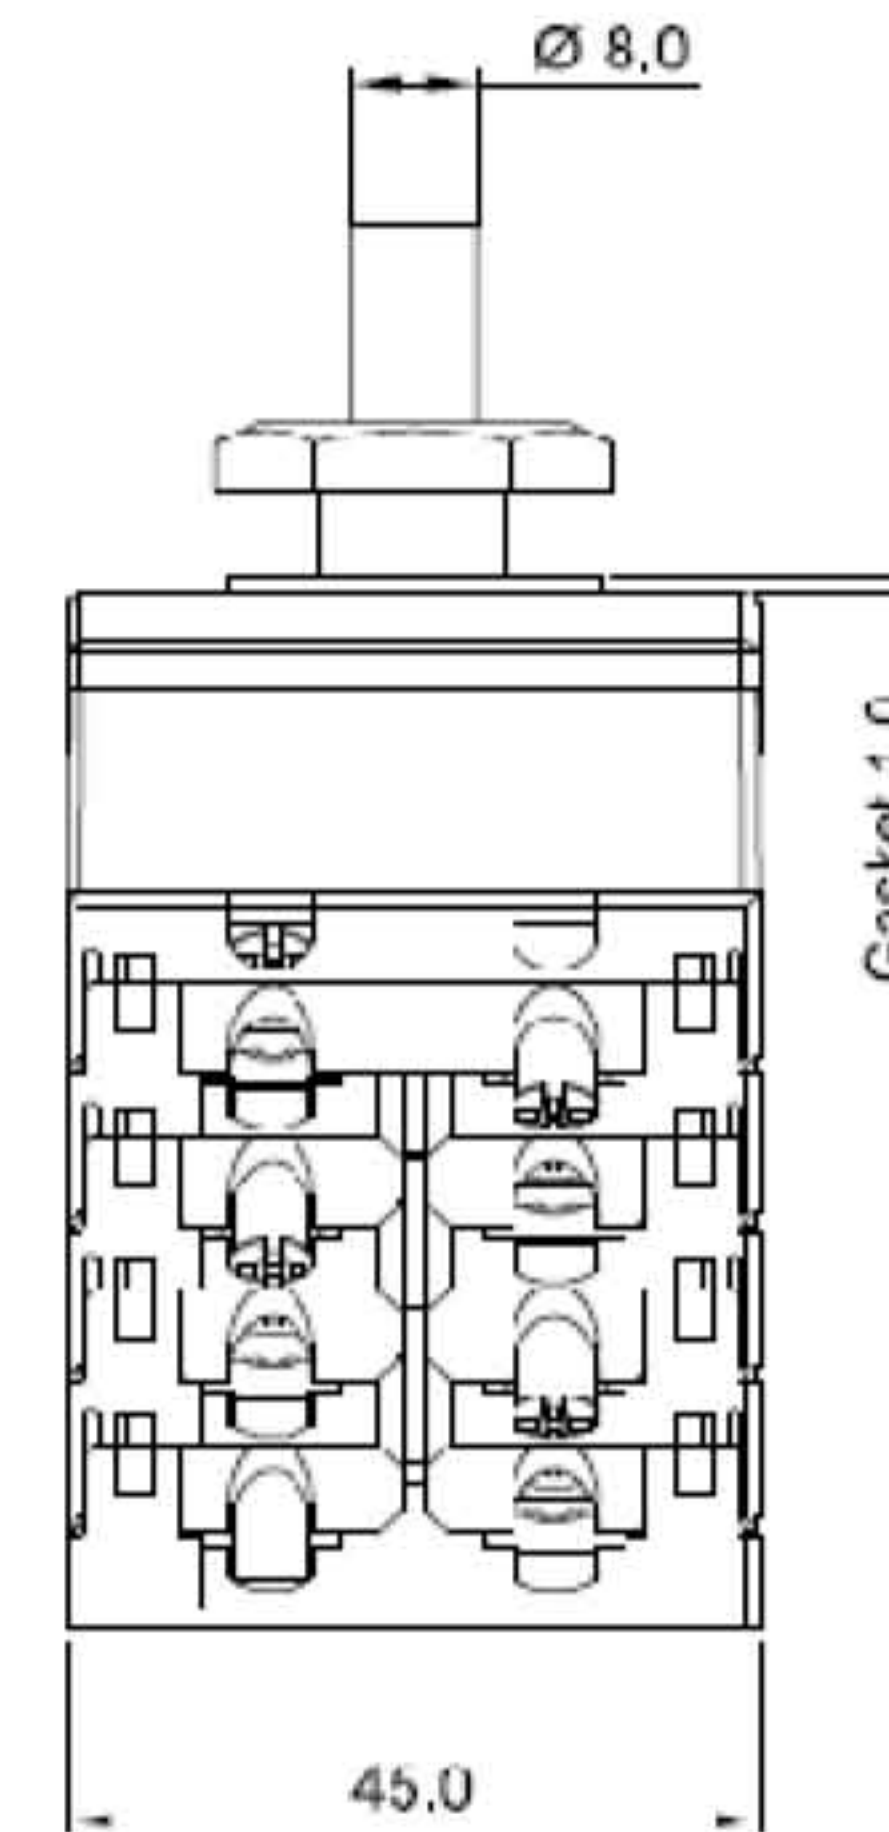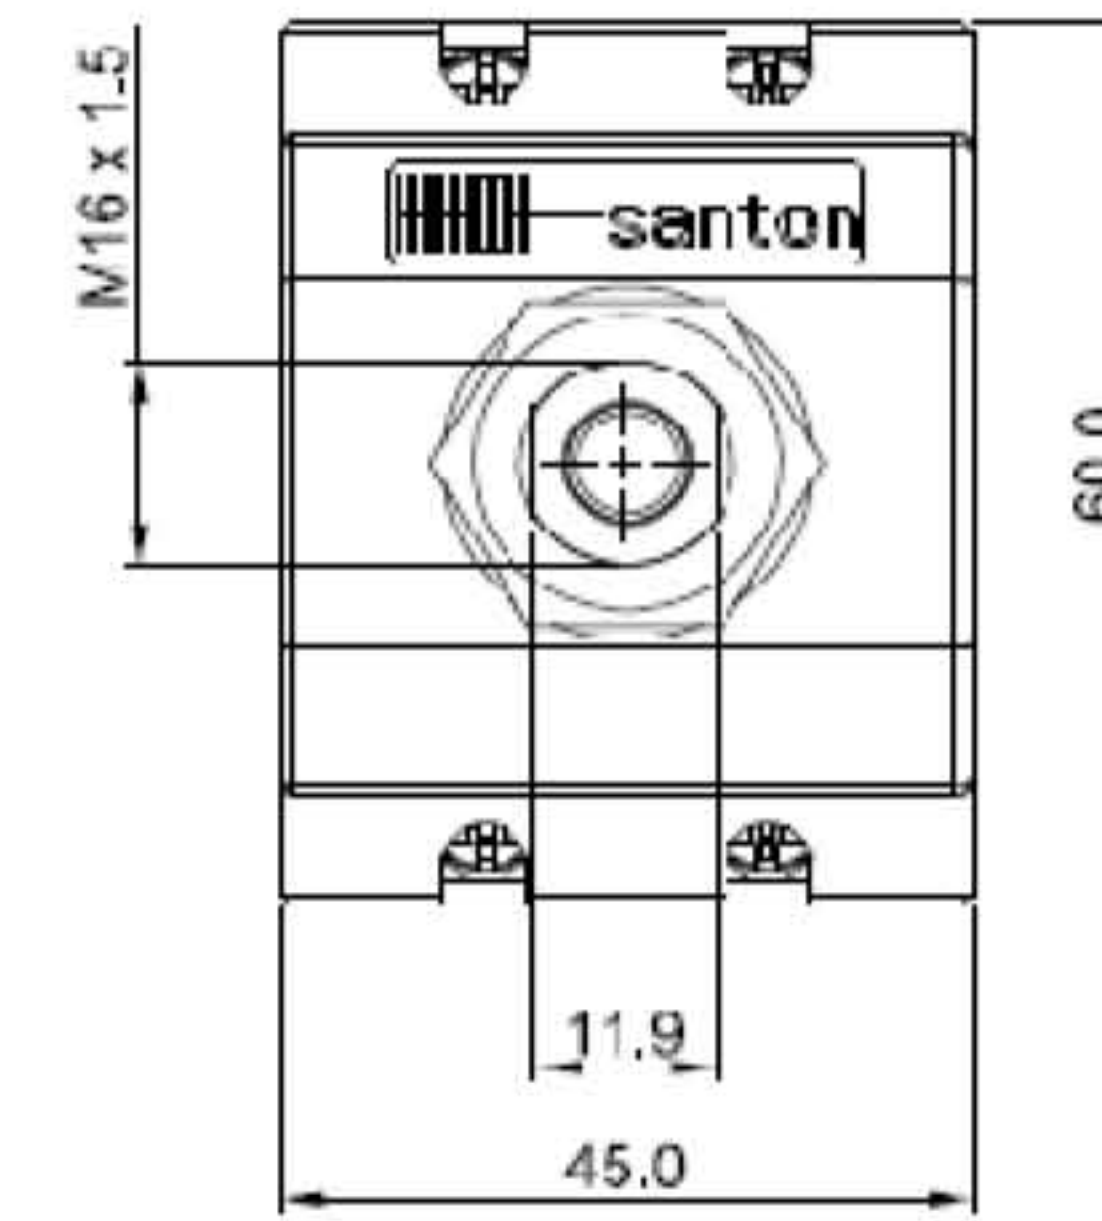

Mounting instructions

In the application all ratings have to be respected. When building the switch in an enclosure, the space envelope must be respected. The terminals, without interconnection can take copper wires up to 6 mm². The recommended Spade Tongue Terminals may have a maximum width of 9 mm. For CSA and UL applications, registered Spade Tongue Terminals must be used. The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco). After mounting, the wiring must be checked and the switch must operate smoothly.

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Dimensions, specifications and data shown could be subject to change without notice.