



# THE NEW SANTON X-TYPE SWITCH

## TECHNICAL SPECIFICATIONS AND INSTRUCTIONS FOR USE

SANTON X-TYPE SWITCH: X60.16B4-(A)

Switch disconnector for solar application according to IEC 60947-1:83






Contact scheme	Positions			
	Marking	Symbol	Marking	1 2 3 4
12	—/—	—/—		
11	—/—	—/—		
10	—/—	—/—		
9	—/—	—/—		
8	—/—	—/—		
7	—/—	—/—		
6	—/—	—/—		
5	—/—	—/—		
4	+2	—/—	+2	X X
3	-2	—/—	-2	X X
2	-1	—/—	-1	X X
1	+1	—/—	+1	X X

Contacts are made in "X" marked position.

Symbols for interconnection: [ ]

Technical data	Symbol	Unit
nominal voltage (DC poles)	Ue	600 V dc
nominal current (DC poles), if requested	Ie	16 A dc
nominal voltage (second rating DC poles, if requested)	Ue	V dc
nominal current (second rating DC poles, if requested)	Ie	A dc
method of mounting		DIN rail and or Base mounting [B]
number of DC poles		4
utilization category DC		DC-21B
actuator		without a knob, suitable for standard black knob [A] OFF at 3 hr, ON at 6 hr, OFF at 9 hr, ON at 12 hr
positions		Uimp 8 kV
rated impulse withstand voltage	Ui	600 V
insulation voltage	Iu	16 A
rated thermal current uninterrupted duty	Icw	480 A
rated short-time withstand current (1s)	Icm	1,4 kA
rated short-circuit making capacity		5 kA
rated conditional short-circuit current		1,6 W
max. cut-off current		
max power dissipation		
method of operation		independent manual operation
minimum required dimensions of enclosures l x w x h*		124 x 47 x 74 mm
* see the drawing for the height of the switch. The number of layers H is:		4
terminal screws M4 need a tightening torque, min. - max.		1,5 1,7 Nm
tightening torque screw in the standard black knob, min. - max.		2,0 2,5 Nm
minimum required fine wire cross-section: IEC60947-1, table 9		2,5 mm²
ambient temperature allowed between		-5 and +40 °C
storage temperature allowed between		-40 and +80 °C
maximum relative humidity, without condensation at 20 °C		90 %
pollution degree		2
IP rating terminals		IP20
IP rating gland of the shaft in case of single hole panel mounting		
nominal voltage (AC poles)	Ue	0 V AC
nominal current (AC poles)	Ie	0 A AC
number of DC poles		0
auxiliary contact, nominal current 16A at 250 V, AC15		No auxiliary contact
weight		221 g
accessories:		0

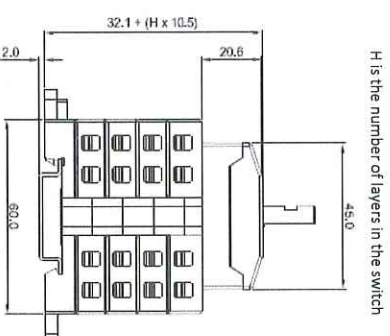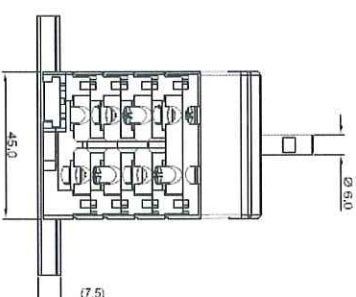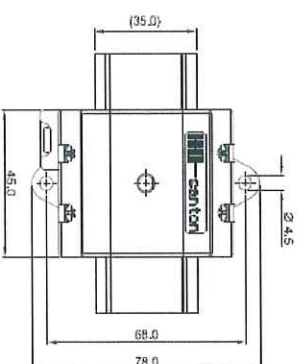

95,1

### Mounting instructions

In the application all ratings have to be respected. When building the switch in an enclosure, the space envelope must be respected. The terminals can take flexible wires up to 6 mm² and fork shoes for wires up to 10 mm² (type 3547C from Vogt). After mounting, the wiring must be checked and the switch must operate smoothly.

### Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.  
- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.  
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Dimensions, specifications and data shown could be subject to change without notice.