

# Insulation Monitoring device for Industrial applications

**ID SERIES, TYPES : ID-03 / ID-03.T**



# NEW!

交流、直流、儲能、電動汽車、船舶牽引

- Designed to be used in demanding industrial environments up to 7200 VAC
- Functionality verification has included frequency converter applications
- Measures the insulation resistance and capacitance of AC/DC networks
- Detects also symmetrical insulation faults
- Suitable for different application fields, for example
  - AC drive installations
  - AC installations in demanding environments
  - Service and training facilities
  - DC networks
  - Electric vehicle DC charging stations
  - Marine and traction (ID-03.T)

## Power supply specifications

Nominal Input voltage	110-240 VAC, 110-300 VDC (Schurter 0001.2503 (T800mA))
Nominal input current	0.04 A at 230 VAC
Line frequency	48 ~ 62 Hz

## Measurement specification

Maximum input voltage	690 VAC / 800 VDC
Resistance measurement range	20k Ω...5MΩ with better than 15% accuracy
System frequency	DC, 10Hz - 500Hz
Measuring impedance	220kΩ
Test voltage	30Vp max

## Alarm contact with settable limit (potential free changeover)

Alarm contact	5A at 250VAC
---------------	--------------

## Other functions

RS-485 serial connection	
Modbus/TCP interface for remote monitoring and controlling	
Analog output of resistance measurement	4...20 mA, with current loop transmitter CT-03

High voltage couplers HVC-16AC, HVC-40AC and HVC-72AC enables insulation level monitoring of industrial isolated (IT) networks with voltages up to 1600 VAC, 4000 VAC or 7200VAC

Suitable also for frequency converter solutions

Compatible also with 3 phase IT networks

Self-testing automatic                      Continuous

Self-testing immediate                      With TEST button

## Standards

Measurements	IEC 61557-8:2014
Safety	IEC 61010-1:2010 (3 <sup>rd</sup> Edition), IEC 60664-1 and IEC 60664-3

EMC	IEC 61326-2-4, CISPR 11 / EN55011, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-11
-----	--

Marine

## General


Dimension (W x L x D)	ID-03	106 x 110 x 62 mm
	CT-03	36 x 110 x 62 mm

Case Material                      Plastic

Mounting interface                      DIN rail clamp or screw mounting

# Insulation Monitoring device for Industrial applications

**ID SERIES, TYPES : ID-03 / ID-03.T**

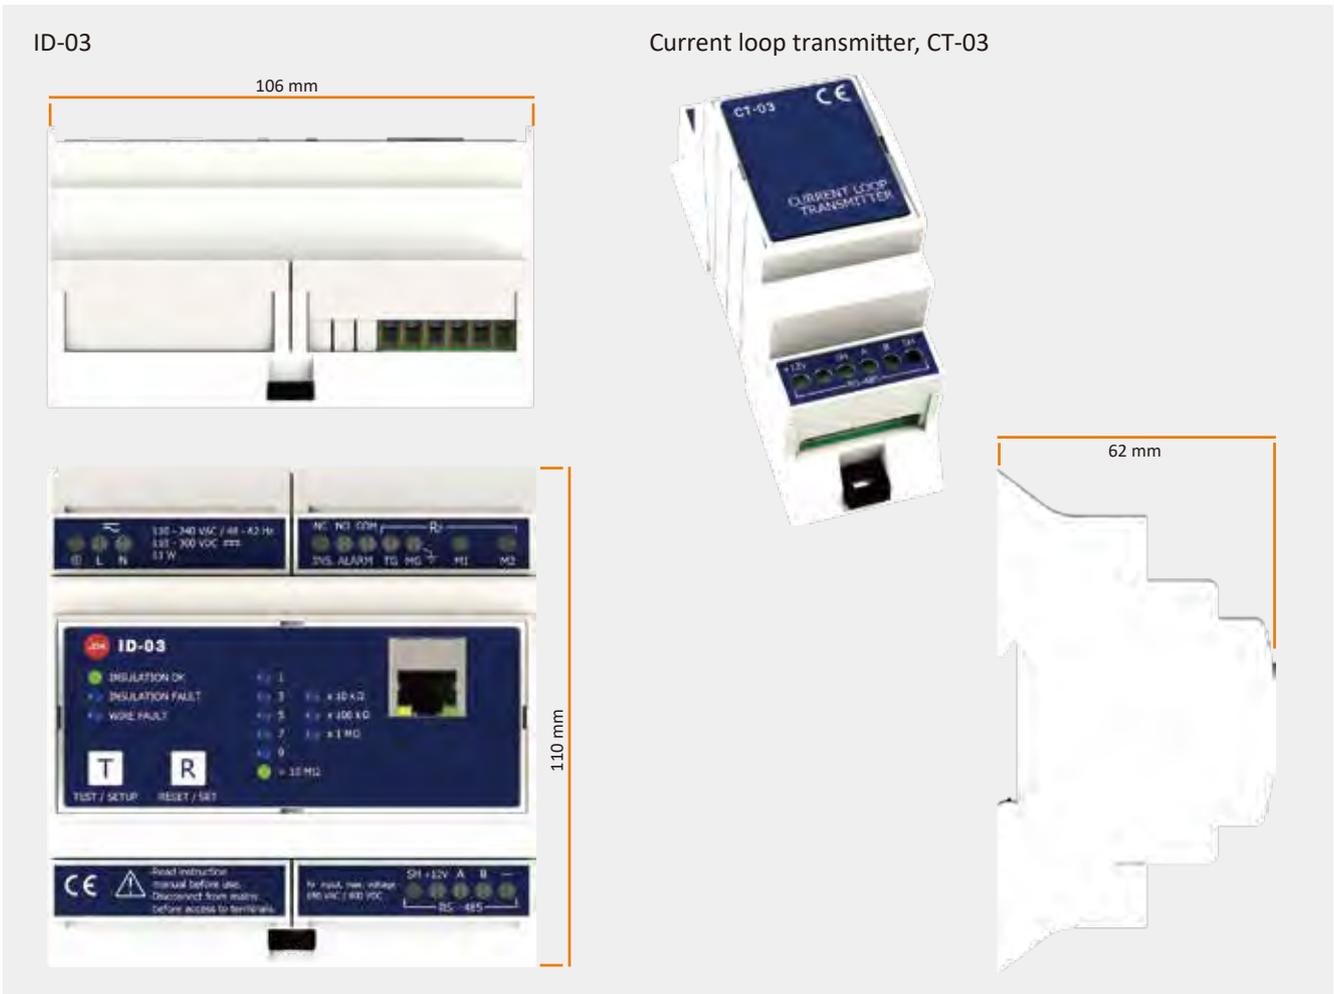

ID-03.T is able to withstand even more demanding conditions:

- Minimum temperature -25 °C
- Vibration
- Harsh humidity stress
- Maximum input voltage 400 VAC / 400 VDC
- Resistance measurement range 1...900k Ω
- Maximum system leakage capacitance 300uF

Possible installation locations include railway and marine applications.

ID-03 is available also without enclosure (ID-03.L) for device manufacturers.

All our insulation monitoring devices can be monitored remotely over the Internet, independently of distance and location.