


## Data Sheet Santon X-Type switch X100.40R4E-A



X100.40R4E-A

Switch disconnector for solar application according to IEC 60947-1&3 by KEMA



	Terminals Scheme													
Layer No.	Front Side		Symbol	Rear Side		<b>On Positions</b>								
	Left	Right	Symbol	Left	Right	1	2	3	4					
6			_/_	+2		Х								
5		l	_/_		+2	Х								
4	-2		_/_	-2		Х								
3		-1	_/_		-1	Х								
2			_/_	+1		Х								
1			_/_		+1	Х								


Contacts are made in "X" marked position. Symbols for interconnection: [

Technical data	Symbol	Merit		Unit				
rated operational voltage (DC poles)	Ue		1000	V dc				
rated operational current (DC poles)	le		40	A dc				
rated operational voltage (second rating DC poles, if requested)	Ue		0	V dc				
rated operational current (second rating DC poles, if requested)	le		0	A dc				
rated operational voltage (third rating DC poles, if requested)	Ue		0	V dc				
rated operational current (third rating DC poles, if requested)	le		0	A dc				
method of mounting		reverse single hole mounting IP65 [R] terminals access from bottom side						
number of DC poles			4					
utilization category DC	DC-21B							
actuator	standard bl	standard black [A],						
positions	OFF at 12 h	OFF at 12 hr, ON at 3 hr [E]						
rated impulse withstand voltage	Uimp		8	kV				
insulation voltage	Ui		1000	V				
rated thermal current uninterrupted duty	lu		40	А				
rated short-time withstand current (1s)	Icw		750	А				
rated short-circuit making capacity	Icm		1,4	kA				
rated conditional short-circuit current			5	kA				
max power dissipation			3,8	W				
method of operation	independer	nt manual operation						
minimum required dimensions of enclosures L x W x H*			124 x 47 x 95	mm				
* see the drawing for the height of the switch. The number of layers N is:			6					
tightening torque terminal screws M4 , min max.		1,2	1,3	Nm				
tightening torque panel mounting nut, min max.		2,0	2,5	Nm				
tightening torque M3 screw in the standard black knob, min max.		0,5	0,7	Nm				
minimum required fine wire cross-section: IEC60947-1, table 9			2x6	mm²				
ambient temperature allowed between			- 25 to + 70	°C				
storage temperature allowed between			- 40 to + 80	°C				
maximum relative humidity, without condensation at 20°C			90	%				
pollution degree			2					
IP rating terminals			IP20					
IP rating gland of the shaft in case of single hole panel mounting			IP65					
rated operational voltage (AC poles)	Ue			V ac				
rated operational current (AC poles)	le			A ac				
number of AC poles (for general use)								
auxiliary contact(s), AC15 No auxiliary								
auxiliary contact ratings				,				
weight			284	g				
accessories:	_		204	Б				

01

## X100.40R4E-A



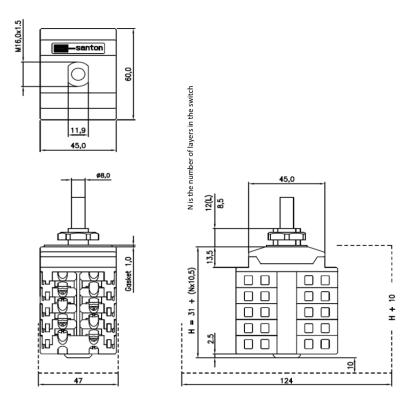


## **Mounting instructions**

In the application all ratings have to be respected. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards. The terminals, without interconnection can take copper wires up to 6 mm<sup>2</sup>. The recommended Spade Tongue Terminals may have a maximum width of 9 mm. For CSA and UL applications, registered Spade Tongue Terminals must be used. The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco). After mounting, the wiring must be checked and the switch must operate smoothly.

## Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

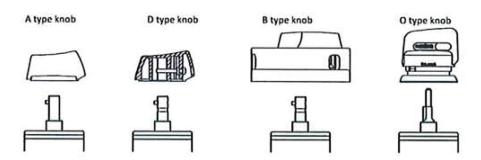

Dimensions, specifications and data shown are be subject to change without notice.