




Leading - edge Technology

- ▶ DC input voltage up to 1000V
- ▶ Maximum efficiency of 98%
- ▶ Internal DC switch
- ▶ Transformerless
- ▶ Compact design
- ▶ Multi MPP controller
- ▶ MTL - String
- ▶ Bluetooth / RF technology / Wi-Fi
- ▶ Sound control
- ▶ Easy installation
- ▶ Comprehensive Growatt warranty program

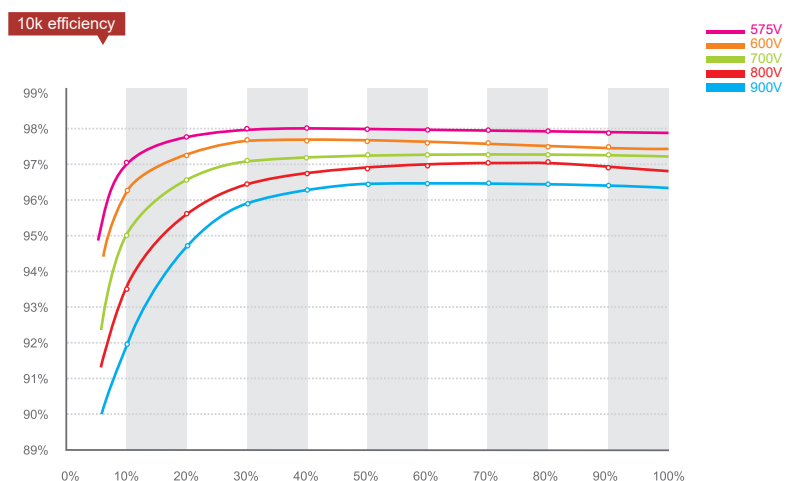

GROWATT NEW ENERGY TECHNOLOGY Co.,LTD

A: No.28 Guanghui Road, Longteng Community, Shiyan, Baoan District, Shenzhen, P.R.China.

T: + 86 755 2747 1900 F: + 86 755 2749 1460 E: info@ginverter.com

Note: Subject to change without any notice.

Datasheet

	Growatt 10000UE	Growatt 12000UE	Growatt 18000UE	Growatt 20000UE
Input Data				
Max. DC power	10500W	12500W	18700W	20800W
Max DC voltage	1000V	1000V	1000V	1000V
Start Voltage	350V	350V	350V	350V
PV voltage range	180V - 1000V	180V - 1000V	180V - 1000V	180V - 1000V
MPP voltage range / DC nominal voltage	300V - 1000V / 600V	300V - 1000V / 600V	300V - 1000V / 600V	300V - 1000V / 600V
Full load voltage range	400V - 800V	400V - 800V	400V - 800V	400V - 800V
Number of independent MPP trackers/strings per MPP tracker	2/2	2/2	2/3	2/3
Max. input current	15A / 15A	17A / 17A	23A / 23A	26A / 26A
Max. input current per string	20A	20A	20A	20A
Output (AC)				
Rated AC output power	10KW	12KW	18KW	20KW
Max. AC power	10KVA	12KVA	18KVA	20KVA
Max. output current	16A	19A	28.6A	32A
AC voltage range; range	3/N/PE, 230V/400V 184 - 275V	3/N/PE, 230V/400V 184 - 275V	3/N/PE, 230V/400V 184 - 275V	3/N/PE, 230V/400V 184 - 275V
AC grid frequency ; range	50/60Hz; 44-55Hz/54-65Hz	50/60Hz; 44-55Hz/54-65Hz	50/60Hz; 44-55Hz/54-65Hz	50/60Hz; 44-55Hz/54-65Hz
Adjustable displacement power factor	0.8 leading -0.8lagging	0.8 leading -0.8lagging	0.8 leading -0.8lagging	0.8 leading -0.8lagging
THDI	<3%	<3%	<3%	<3%
AC connection	Three phase	Three phase	Three phase	Three phase
Efficiency				
Max. efficiency	98%	98%	98%	98%
Euro - eta	97.5%	97.5%	97.5%	97.5%
MPPT efficiency	99.5%	99.5%	99.5%	99.5%
Protection Devices				
DC reverse polarity protection	yes	yes	yes	yes
DC switch for each MPPT	yes	yes	yes	yes
Output AC overcurrent protection	yes	yes	yes	yes
Output AC overvoltage Protection - V aristor	yes	yes	yes	yes
Ground fault monitoring	yes	yes	yes	yes
Grid monitoring	yes	yes	yes	yes
Integrated all-pole sensitive leakage current monitoring unit	yes	yes	yes	yes
General Data				
Dimensions (W / H / D) in mm	740/490/235	740/490/235	740/570/235	740/570/235
Weight	41KG	41KG	60KG	60KG
Operating temperature range	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C
Noise emission (typical)	≤ 55 dB(A)	≤ 55 dB(A)	≤ 55 dB(A)	≤ 55 dB(A)
Self-consumption night	< 0.5W	< 0.5W	< 0.5W	< 0.5W
Topology	Transformerless	Transformerless	Transformerless	Transformerless
Cooling concept	Smart cooling	Smart cooling	Smart cooling	Smart cooling
Environmental Protection Rating	IP 65	IP 65	IP 65	IP 65
Altitude	2000m without derating	2000m without derating	2000m without derating	2000m without derating
Relative Humidity	0~100%	0~100%	0~100%	0~100%
Features				
DC connection	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)
AC connection	ScREW terminal	ScREW terminal	ScREW terminal	ScREW terminal
Display	LCD	LCD	LCD	LCD
Interfaces: RS232/R485/Bluetooth/Wi-Fi	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt
Warranty:5 years / 10 years	yes / opt	yes / opt	yes / opt	yes / opt
Certificates and Approvals				
VDE-AR-N4105, CEI 0-21, CE, VDE 0126-1-1, IEC 62109, RD 1663/2000, G59/2, EN50438, AS4777, AS/NZS 3100				