




PV CONNECTOR 太陽能快速接頭

JDA-C4/C4-1.5K PV Cable Connector for PV System

JDA-C6/C6-1.5K PV Box Connector for PV System

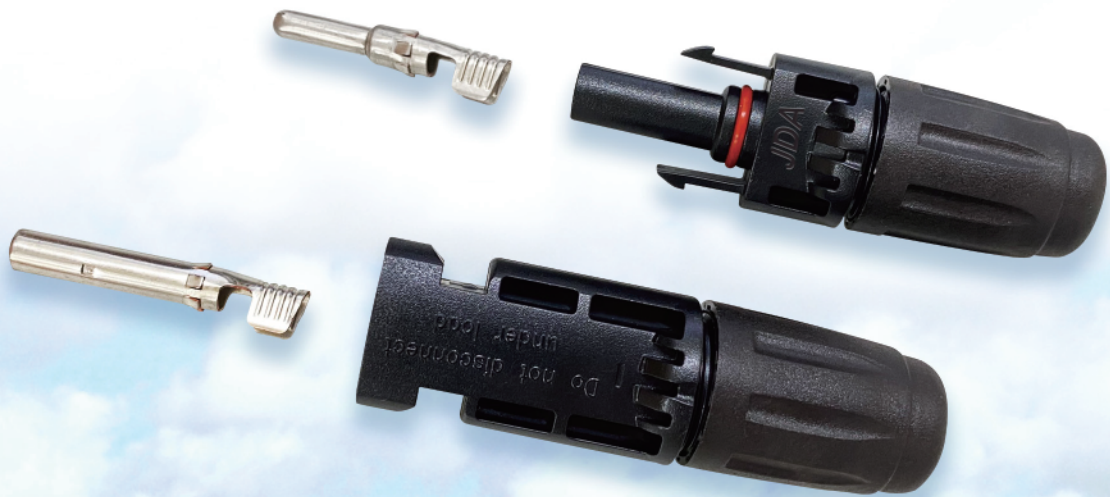



PV Connector

JDA-C4/C4-1.5K PV Cable Connector for PV System

JDA-C6/C6-1.5K PV Box Connector for PV System



JDA-C4	JDA-C6	JDA-C4-1.5K
Permissible temperature range 允許的溫度範圍	-40°C...+85°C	
Protection degrees (mated/unmated) 防護等級	IP 68	
Rated current according to TÜV TUV額定電流	35A	
Rated voltage 額定電壓	TUV 1,100/1,100/1,500 V DC (IEC62852) ; UL 1,000 V DC (UL6703:2014 R12.17)	
Protection class 防護等級	II	
Construction type 構造型式	unipolar, not reusable, free connector	
Tightening torque 鎖緊扭力	1.5+/-0.2 Nm (JDA-C4&C4-1.5K) 1.1+/-0.2Nm (JDA-C6)	
Connentable cables 連接電纜	Cable according to standard TUV EN50618:2014 flexible lines, strand tinned	
Cable cross section 電纜內徑	2.5 mm ² , 4 mm ² , 6 mm ²	
Cable exterior diameter 電纜外徑	5.5...7.8 mm	



Order data

JDA-C4/4-1.5K


PV Cable Connector for PV System

Female Socket Housing	Type	Pack Unit	Order No.
	JDA-C4/C4-1.5K(+)		
	Plastic Housing for Female Contact 正極線端連接器	100 pc	FSH 2-1-11114 FSH 2-25124 C4-1.5K(+)

	Socket Female Contact 母端子	100 pc (Bag) 1500 pc (Roll)	SFC 2-87220260
--	-------------------------------------	--------------------------------	-----------------------

Male Pin Housing	Type	Pack Unit	Order No.
	JDA-C4/C4-1.5K(-)		
	Plastic Housing for Male Contact 負極線端連接器	100 pc	MPH 2-1-01114 MPH 2-15124 C4-1.5K(-)

	Pin Male Contact 公端子	100 pc (Bag) 1500 pc (Roll)	PMC 2-87220260
---	--------------------------------	--------------------------------	-----------------------

Accessories	Type	Pack Unit	Order No.
	Sealing Cap Universal Version for Female Housing and Male Housing 正/負極防塵塞	100 pc (Bag)	JDA-000MC (Male) JDA-000FC (Female)

JDA-C6/C6-1.5K

PV Box Connector for PV System

Female Socket Housing	Type	Pack Unit	Order No.
	JDA-C6/C6-1.5K(+)		
	Plastic Housing for Female Contact 正極板端連接器	100 pc	FSH 2-30116-1.5K(+) C6-1.5K(+)

	Socket Female Contact 母端子	100 pc (Bag) 1500 pc (Roll)	SFC 2-87220260
--	-------------------------------------	--------------------------------	-----------------------

Male Pin Housing	Type	Pack Unit	Order No.
	JDA-C6/C6-1.5K(-)		
	Plastic Housing for Male Contact 負極板端連接器	100 pc	PHMC 2-20116-1.5K(-) C6-1.5K(-)

	Pin Male Contact 公端子	100 pc (Bag) 1500 pc (Roll)	PMC 2-87220260
---	--------------------------------	--------------------------------	-----------------------



PV Connector systems for PV Module

Type number		JDA-C4-F & JDA-C4-M		JDA-C4-1.5K-F JDA-C4-1.5K-M	JDA-C6-1.5K-25 JDA-C6-1.5K-40 JDA-C6-1.5K-60
Feature		MC4 Compatible & MC4		MC4 Compatible	MC4 Compatible
Size, mm	Female	62.0 x 19.5		44.5 x 24.5-M16	49.5 x 19.5-M12
	Male, Negative	64.5 x 19.5		46.0 x 24.5-M16	51.0 x 19.5-M12
Conformity standards	UL 6703	US 72201731 01		US 72201731 01	US 72201731 01
	EN 62852:2015	R 50465271		R 50465271	R 50465271
	Others	IEC61215, IEC61646, IEC61730		IEC61215, IEC61646, IEC61730	
Rated voltages		DC 1100V(TUV), DC 1000V(UL)		DC 1500V(TUV), DC 1000V(UL)	
Rated currents		25A for 2.5 & 4.0mm ²	35A for 6mm ²	35A	35A For 6.0mm ² Wire size range (10 AWG)
					35A For 4.0mm ² Wire size range (12 AWG)
					35A For 2.5mm ² Wire size range (14 AWG)
Contact resistance(contacted)		0.3mΩ(Initial)	0.3mΩ(Initial)	≤ 0.3mΩ(Initial)	≤ 0.3mΩ(Initial)
Wire size range(mm ²)		2.5, 4	4,6	2.5, 4.0 and 6.0	2.5, 4.0 and 6.0
Protection degree		IP68(1m, 24hours)	IP68(1m, 24hours)	IP68	IP68
Rated impulse voltage		8kV	8kV	8kV	8kV
Upper limiting Temperature		125°C	125°C	100°C	100°C
Overvoltage Category		III		III	III
Flammability class		UL94-5V/V0		UL94-5V/V0	UL94-5V/V0
Material	Insulation	PPO/PA66		PPO/PA66	PPO/PA66
	Contact	Tin plated copper alloy		Tin plated copper alloy	Tin plated copper alloy
Petaining force of locking	Connect-connect	≥ 20kgf		≥ 20kgf	≥ 20kgf
	Connect-cable	≥ 20kgf		≥ 20kgf	≥ 20kgf
Connector contact systems		MC4 compatibility systems		MC4 compatibility systems	MC4 compatibility systems
Ambient temperature		-40~85°C		-40~85°C	-40~85°C
Note		Do not disconnect under load		Do not disconnect under load	Do not disconnect under load



Product Catalog



JDA-C4
太陽能連接器



JDA-C6
電箱外接連接器



JDA-C8
(一對二 / 三通)



OPEN TOOL
連接器開啟工具



PV CABLE
太陽能專用線



CABLE + CONNECTOR
客制帶線連接器 (客製線長)













JDA-C4, 6 連接器金屬端子零售




Connector 與他牌之相容性對照表

相容：○ 不相容：×

Type	MC	Yukita	SMK	SMK	SMK
	MC 4	YS-254 / 255	PV-03	PV-02	Panel Connector
					
公 <=> 母	○	○	○	○	○
母 <=> 公	○	○	○	○	○

Type	Hosiden	Weidmuller	Amphenol	Tyco	Kitani
	HSC2009 / 2010	WM-4	H4 Solar Connector	Solar Connector	KTN-PVCIP-FA
					
公 <=> 母	○	○	○	×	×
母 <=> 公	○	○	○	×	×

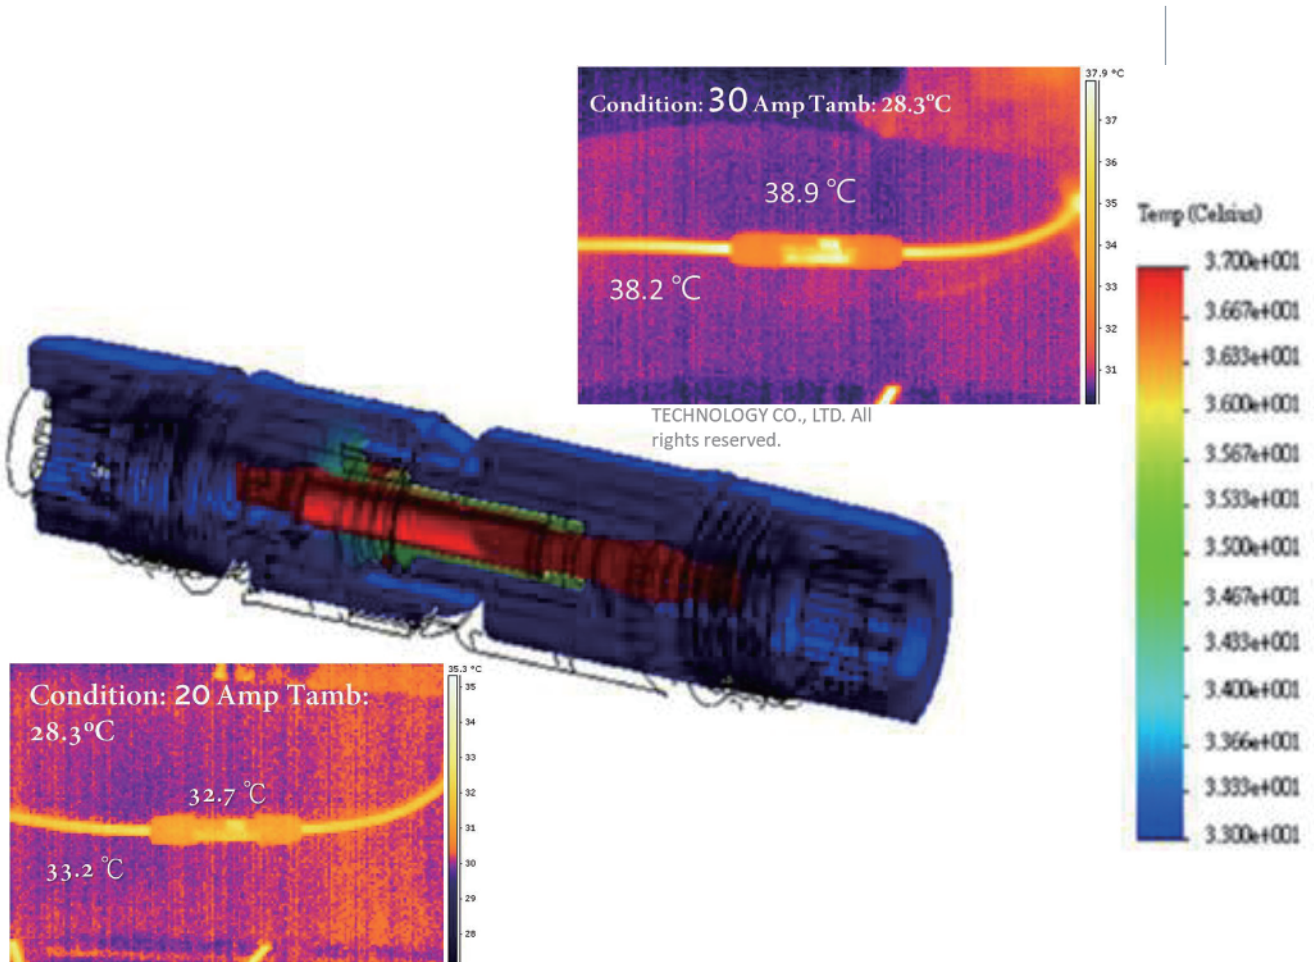




日燭科技有限公司
JD Auspice Co., Ltd.

愛護地球以及節約能源

日燭科技 擁有最高品質及安全認證

日燭科技有限公司深知愛護地球以及節約能源之重要性，積極推動環保之太陽能光電系統組件供應，祈望以此節能減碳，能喚醒大家對環境保護之重視，冀望同業先進以此共同目標邁進。



 www.jdauspice.com



 [@jdauspice](https://www.facebook.com/jdauspice)



 ID : @jdapv

