



日燭國際事業股份有限公司
JD Auspice Co., Ltd.

HBI 30000TL-US-208A


30kW three phase all-in-one hybrid inverter for small commercial use.

Features

- All-in-one hybrid inverter
- Compact design
- Touchscreen LCD
- Seamless on/off grid transfer within 10 ms
- Support remote control of DG
- Programmable working mode
- Multiple MPPT inputs
- AFCI(PV Arc Fault Detection) Integrated
- Max. 10 units in parallel for on&off grid operation



Block Diagram

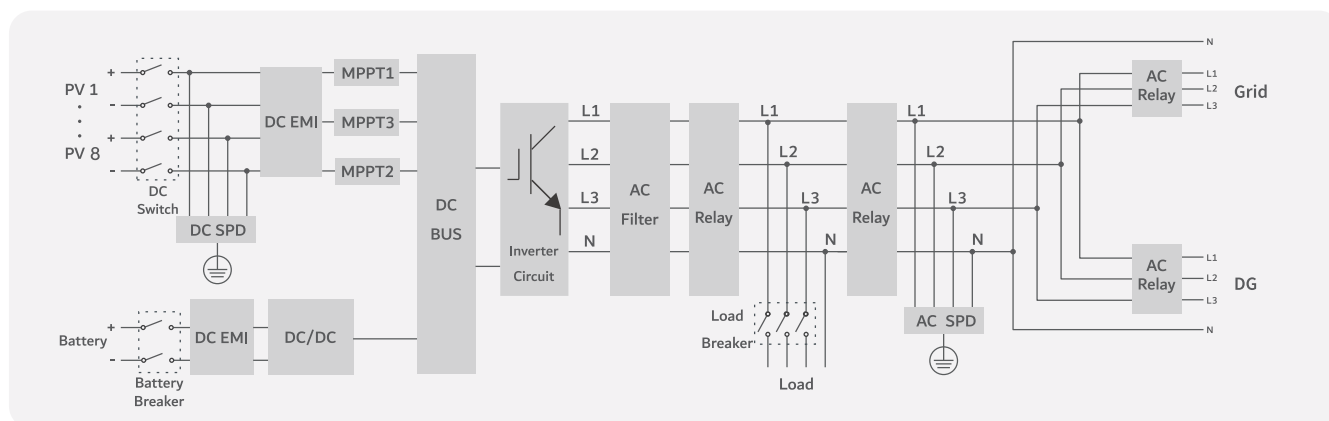

note: subject to change without any notice, JDA pay no responsibility



HBI 30000TL-US-208A	
AC(on-grid)	
Apparent power	30kVA
Rated power	30kW
Rated voltage	120/208V Wye
Rated current	83A
Voltage range	190-240V Wye/High-leg delta with split phase (Opt) (Derate below 208V 3P)
Rated frequency	50/60Hz
Frequency range	48~52/58~62Hz
THDI	<3%
PF	0.8 lagging~0.8 leading
AC connection	3L/N/PE
AC Input	45kVA(Build-in ATS)
AC(off-grid)	
Apparent power	30kVA
Rated power	30kW
Rated voltage	120/208V Wye
Rated current	83A
Voltage range	190-240V Wye/High-leg delta with split phase (Opt) (Derate below 208V 3P)
THDU	≤2% linear
Rated frequency	50/60Hz
Overload capability	110%-10 mins 120%-1 min
DC (Battery and PV)	
Max. PV Open-circuit voltage	650V
Max. PV power	45kWp
PV MPPT voltage range	125V-550V
Number of MPPT	3
PV input/MPPT	2/3/3
PV input current/MPPT	40/60/60A
Max. PV input current	160A
Max. PV Isc/MPPT	60/90/90A
Battery voltage range	260-620V
Full load battery voltage range	300-600V
Max. charge/discharge power	30kW
Max. charge/discharge current	100A
General Information	
Protection devices	PV DC switch, AFCI, battery breaker and fuse
Protection degree	Type 3R or IP65
Noise emission	<65dB(A)@1m
Operating temperature	-25 °C~+55 °C
Cooling method	Forced-air
Relative humidity	0-95% non-condensing
Max. altitude	2000m (derate over 2000m)
Dimension (W/H/D)	600/990/315mm
Weight	100kg
Topology	Transformerless
Surge Protection	DC Type II / AC Type III
Transfer between on/off grid	Automatic≤10ms
Standby consumption	<20W
Warranty	10 Years
Communication	
Display	Touch screen
Communication	RS485/CAN
Monitoring	WiFi or 4G module available