


Economical Solar Charger for Charging Only



Features

- Seven versions available
(12 and 24 volts 6 amps, 10~30 amps)
- 100% solid state
- True 0 to 100% PWM duty cycle
- Set point accuracy to 50mV
- Rated for 25% overloads
- Fully encapsulated in epoxy potting
- Marine rated terminals / anodized aluminum case
- Battery Temperature compensation
- 8 types of charging curve selection
- No need to derate
- Microcontroller digital accuracy
- Special on / off / on functions
- Optional LCD remote panel for 30 amps model

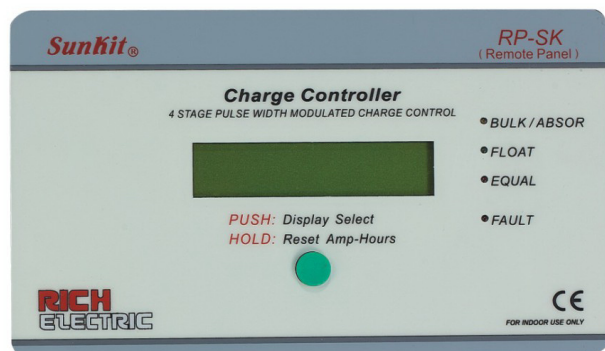