

General Specifications Outdoor models

PVI-6000-OUTD-US-W



Optional Wind interface Box



High-Efficiency, 6kW Inverter

Aurora® grid-tie transformerless inverters offer a unique combination of ultra-high efficiencies, installer-friendly designs, long service life, and competitive initial acquisition costs; significantly increasing return on investment in wind-power installations.

Industry-Leading Features and Performance

- High efficiencies deliver more energy – up to 97% (96.5 CEC).
- MPPT optimize power from eolic generator.
- PMG (Permanent Magnet Generator) Power Curve implemented in high speed MPPT

Unmatched Applications Flexibility

- Full-rated power available up to 50°C ambient temperature.
- Wide MPPT operating range: 50 to 580VDC

Field-Proven Reliability

- IP65 (NEMA 4) rated enclosure withstands the harshest environmental conditions.
- Front-mounted heatsink resists contamination, enhancing cooling and increasing reliability and long-term efficiency.
- Grid-connected operation in accorging to international standard UL1741
- Five-year warranty, optionally extendable to twelve years.

Installer Friendly



- Reverse-polarity protection minimizes potential damage caused by miswiring during installation.
- Front-panel mounted LCD display provides real-time updates for all critical operating parameters.
- RS-485 and USB communications interfaces.
- Anti islanding protection

Model	AC Power
PVI-6000-OUTD-US-W	6kW
Options	
Aurora Communicator software simplifies monitoring via PC. Aurora Easy Control datalogger is available for remote control via Internet, modem or GSM	
Optional interface box	

High Efficiencies Across a Broad Range of Operating Conditions

PVI-6000-OUTD-US-W inverter works with nominal output voltage, at up to 97% efficiency.

The graph to the right demonstrates the high efficiencies, across a continuous range of input voltages and load conditions, for the PVI-6000. The graphs below depicts the industry-leading performance of at three discrete MPPT-voltage reference points, and a continuous range of load conditions.

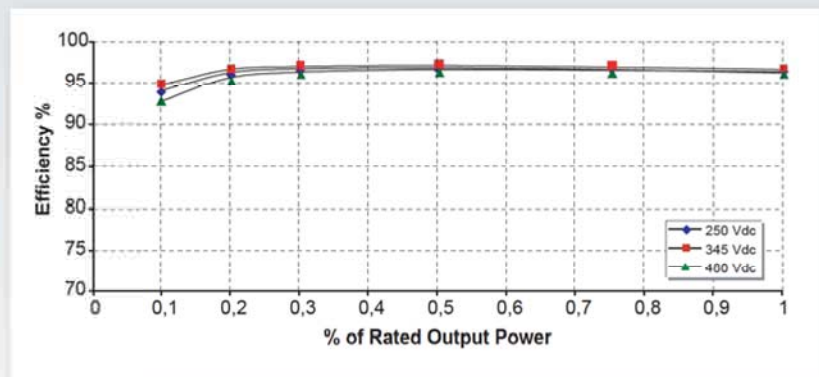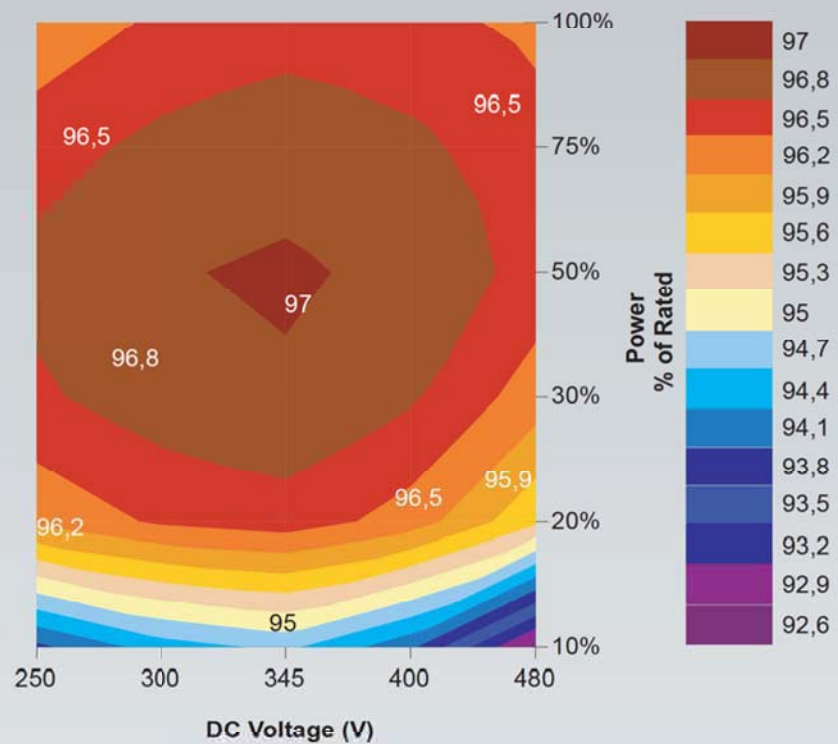


SPECIFICATIONS		PVI-6000-OUTD-US-W
INPUT PARAMETERS (DC Side)		
Nominal DC Power [kW]		6.18
Total Max. Recommended DC Power [kW]		6.4
Operating MPPT Input Voltage Range [V]		50 to 580 (360 nominal)
Full Power MPPT Range [V]		180-530
Max. Input Voltage [V]		600
Activation voltage [V]		200 nominal (adjustable within 50-350)
No of independent MPPT trackers		1
No. of DC Inputs		1
Max. DC Current, each MPPT [A]		36 (44 short circuit)
Thermally Protected DC side varistor		4
DC Connections		4 (2 positive ; 2 negative) screw terminal block Wire size: Solid from AWG 20 to AWG 6 / Stranded from AWG 20 to AWG 8 Cable gland : M25-cable diameter 3/8" to 11/16"
OUTPUT PARAMETERS (AC Side)		
Nominal AC Power [kW]		6
Max. AC Power [kW]		6
AC Grid Connection		single phase 208/277 - split phase 240
Nominal AC Voltage Range [V]		Default - 240V; Optional 208 or 277V (setting required)
Maximum AC Voltage Range [V]		187.2-224.6 ; 216-25.2 ; 249.3-299.2
Nominal AC Frequency [Hz]		60
Max. AC Line Current [A]		24/20/18 (30 short circuit)
AC side varistor		2 (Live - Neutral / Live - PE)
AC Connection		Screw terminal block Wire size: Solid from AWG 20 to AWG 6 / Stranded from AWG 20 to AWG 8 Cable Gland: M25 - Cable diameter 3/8" to 11/16"
Line Power Factor		1
AC Current Distortion (THD)		<2% at rated power with sine wave voltage
Max. Efficiency		97%
CEC Efficiency		96.5%
Feed In Power Threshold [W]		20
Night Time consumption [W]		< 2
Isolation		No (Transformer-less)
ENVIRONMENTAL PARAMETERS		
Cooling		Natural cooling
Ambient Temp. Range [°C]		-25 / + 60 (output power derating above 50°C)
Operating Altitude [ft]		6,000
Acoustical Noise [dBA]		< 50 @ 1mt
Environmental IP Rating		IP65
Relative Humidity		0-100% condensing
MECHANICAL		
Dimensions (HxWxD) [mm]		740x325x195 (29 1/8" x 12 13/16" x 7 11/16")
Weight [kg]		27 (57.3 lbs)
OTHER		
Display		YES (Alphanumeric 2 lines)
Communication		RS485 (Spring terminal block - Conductor cross section: AWG28-16) USB connection (Service) "Aurora Easy-Control" system for remote control (Optional)

Standards and Codes

Aurora inverters comply with standards set for grid-tied operation, safety, and electromagnetic compatibility including: UL1741 & CSA -C22.2 N.107.1-01, VDE0126, CEI 11-20, DK5940, CEI64-8, IEC 61683, IEC 61727, EN50081, EN50082, EN61000, CE certification, El Real Decreto RD1663/2000 de España.

Block Diagram and Operating Configurations

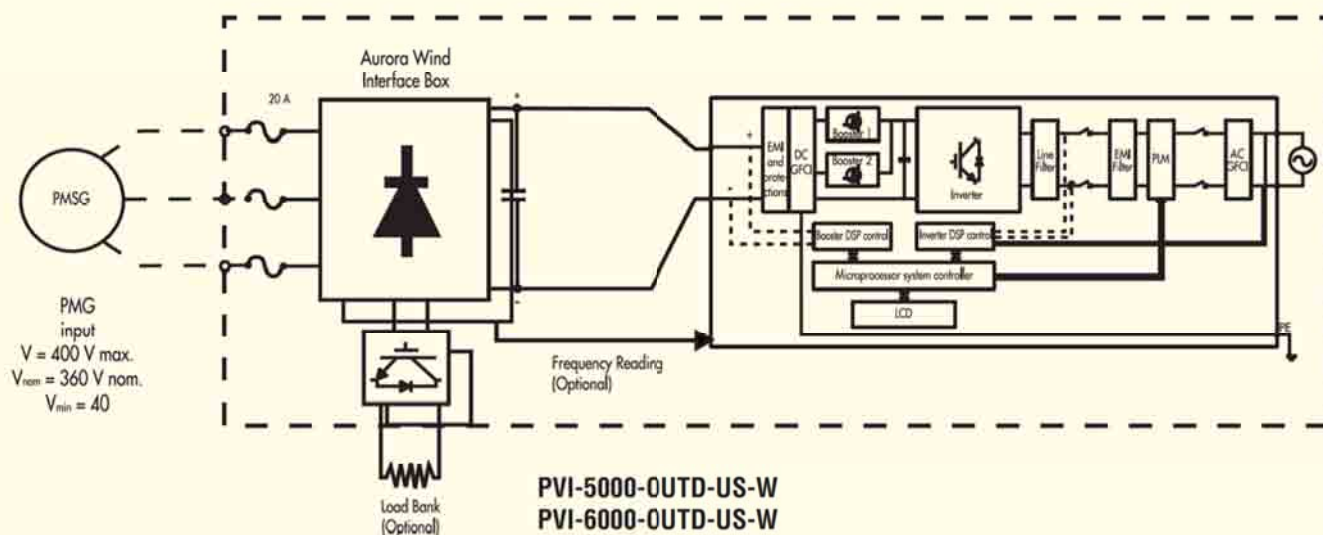

Inverter electrical block diagram