
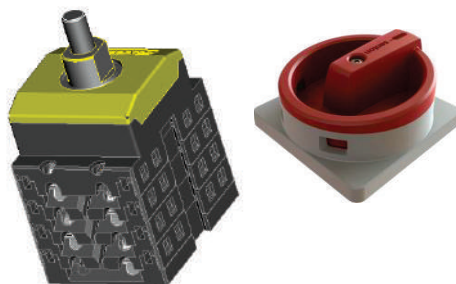


Data Sheet

Santon X-Type switch X100.36PCU4-H

Suitable as photovoltaic disconnect switch in accordance with Article 690 of NFPA 70 (NEC) UL 508, including the requirements for PV application
UL 508i by UL
C : with isolators, not certified






Terminals Scheme									
Layer No.	Front Side Left	Front Side Right	Symbol	Rear Side Left	Rear Side Right	On Positions 1	On Positions 2	On Positions 3	On Positions 4
8				+2		X	X		
7				+2		X	X		
6				-2		X	X		
5				-2		X	X		
4				-1		X	X		
3				-1		X	X		
2				+1		X	X		
1				+1		X	X		

Contacts are made in "X" marked position.
Symbols for interconnection: [

Technical data	Symbol	Merit	Unit
nominal voltage (DC poles)	U	1000	V dc
nominal current (DC poles)	I	36	A dc
method of mounting	single hole mounting IP65 [P]		
number of poles, double pole switching	4		
utilization category DC	Photovoltaic disconnect switch		
actuator	knob with padlock and top screw, red/grey [H]		
method of operation	independent manual operation		
positions	OFF at 3 hr, ON at 6 hr, OFF at 9 hr, ON at 12 hr		
rated impulse withstand voltage	Uimp	8	kV
insulation voltage	Ui	1000	V
rated thermal current uninterrupted duty	Iu	36	A
rated short-time withstand current (1s)	Icw	750	A
suitable for use on a circuit capable of delivery not more than 5.000 rms symmetrical Amperes, 1000 Vdc max, when protected by fuses			
rated conditional short-circuit current		5	kA
max power dissipation		4	W
minimum required dimensions of enclosures L x W x H*		124 x 47 x 116	mm
* see the drawing for the height of the switch. The number of layers N is:		8	
tightening torque terminal screws M4 , min. - max.		1,5 13	1,7 15 Nm Lb.In
tightening torque M3 screw in the standard black knob, min. - max.		0,5 5	0,7 6 Nm Lb.In
tightening torque for the nut on the single hole mounting knob, min. - max.		1,8 16	2,0 18 Nm Lb.In
wire size, "Use 75°C Copper Wire Only", minimum required fine wire cross-section:		2x6	8 mm2 AWG
ambient temperature allowed between		- 20 to + 70 °C	°C
storage temperature allowed between		- 40 to + 80 °C	°C
maximum relative humidity, without condensation at 20°C		90	%
nominal voltage (AC poles)	U		V ac
nominal current (AC poles)	I		A ac
number of AC poles			
wire size, "Use 75°C Copper Wire Only", minimum required fine wire cross-section:			mm2 AWG
auxiliary contact		No auxiliary contact	
weight		350	g
accessories:	-		
	-		

Superior Switch Solutions

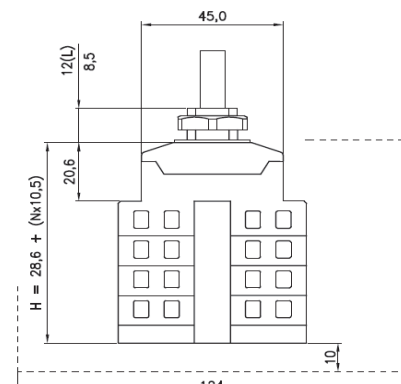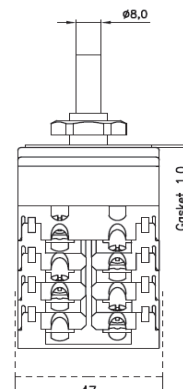

Mounting instructions


In the application all ratings have to be respected. The switch is designed for use on a flat surface of at least a Type 1 Enclosure or equivalent. The minimum dimensions of the enclosure must be respected according to the applicable standards. The position of the handle of the switch shall be marked with a Position Indication plate or direct on the surface of the enclosure to guide proper indication. The "On" and "Off" position may be marked using the symbols "I" and "O" according IEC 417 Symbols 5007 and 5008. The terminal, without interconnection can take copper wires up to 6 mm². The recommended Spade Tongue Terminals may have a maximum width of 9 mm. For CSA and UL applications, registered Spade Tongue Terminals must be used. The registration numbers are UL: E13288 and CSA: LR7 189 (for instance type 165015 from Tyco). After mounting, the wiring must be checked and the switch must operate smoothly.

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.


A type knob




D type knob



B type knob



O type knob



Dimensions, specifications and data shown could be subject to change without notice.

JD Auspice Co., Ltd. TEL: 886-2-2595-9780 FAX: 886-2-2595-9412 service@jdauspice.com www.jdauspice.com
Superior Switch Solutions