




日煬科技有限公司
JD Auspice Co., Ltd.



綜合型錄


Products Brochure

PV BOS

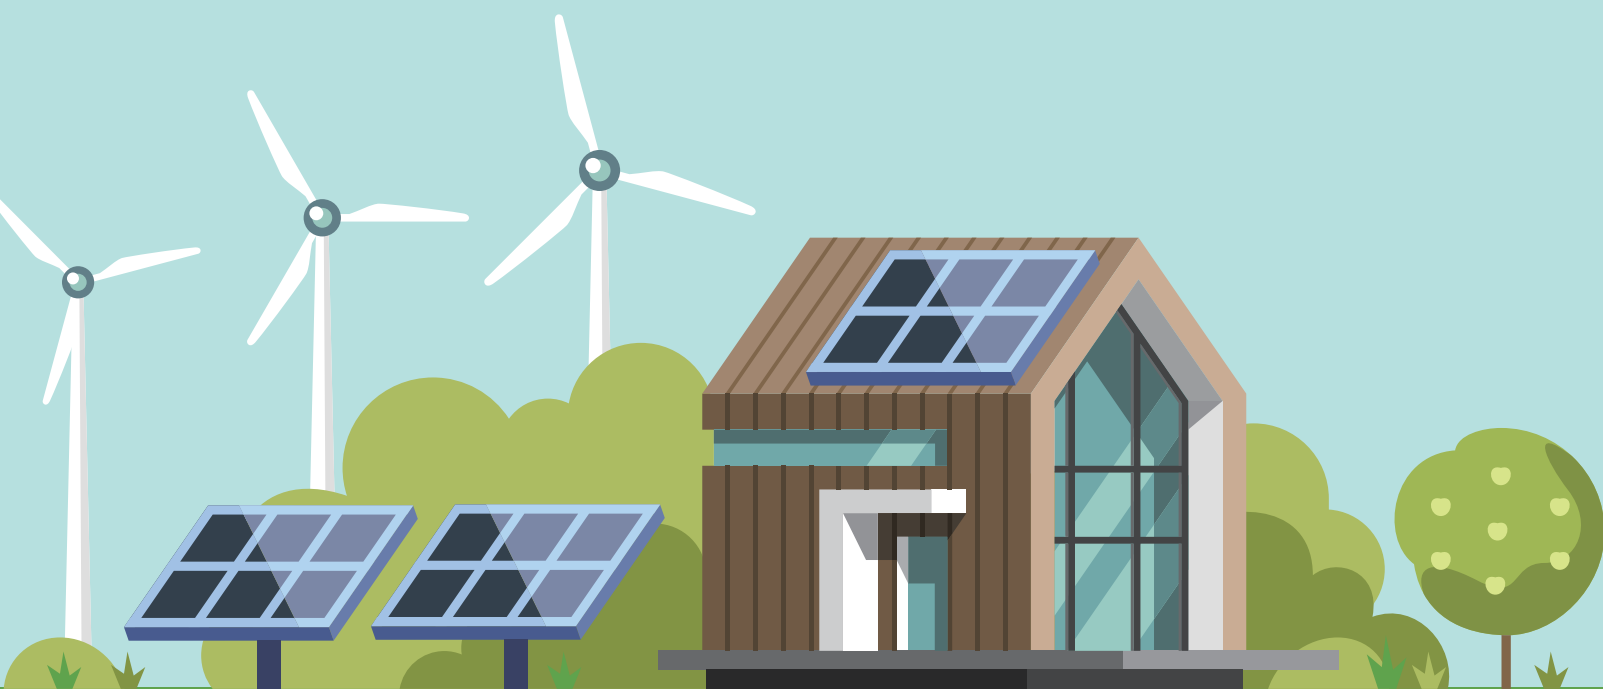

1. 太陽能應用示意圖 Application scheme	p03
2. 環境監測系列 Environmental sensors	p04
3. 太陽能直流組件系列 Solar BOS series	p09
4. 太陽能發電監測系列 PV firm stringMoni ® Monitoring system	p33
5. 追日控制器 Tracker controller	p35
6. 直交流突波吸收器 DC/AC Surge protection device	p36
7. 訊號突波保護器 Network protector	p42
8. 直流開關箱 pvBos ® PV array Combiner Box	p43
9. IP 67 防水箱 IP 67 Enclosure	p44
10. 太陽能變流器系列 PV Inverter	p45

太陽能發電用直流平衡系統組件供應商

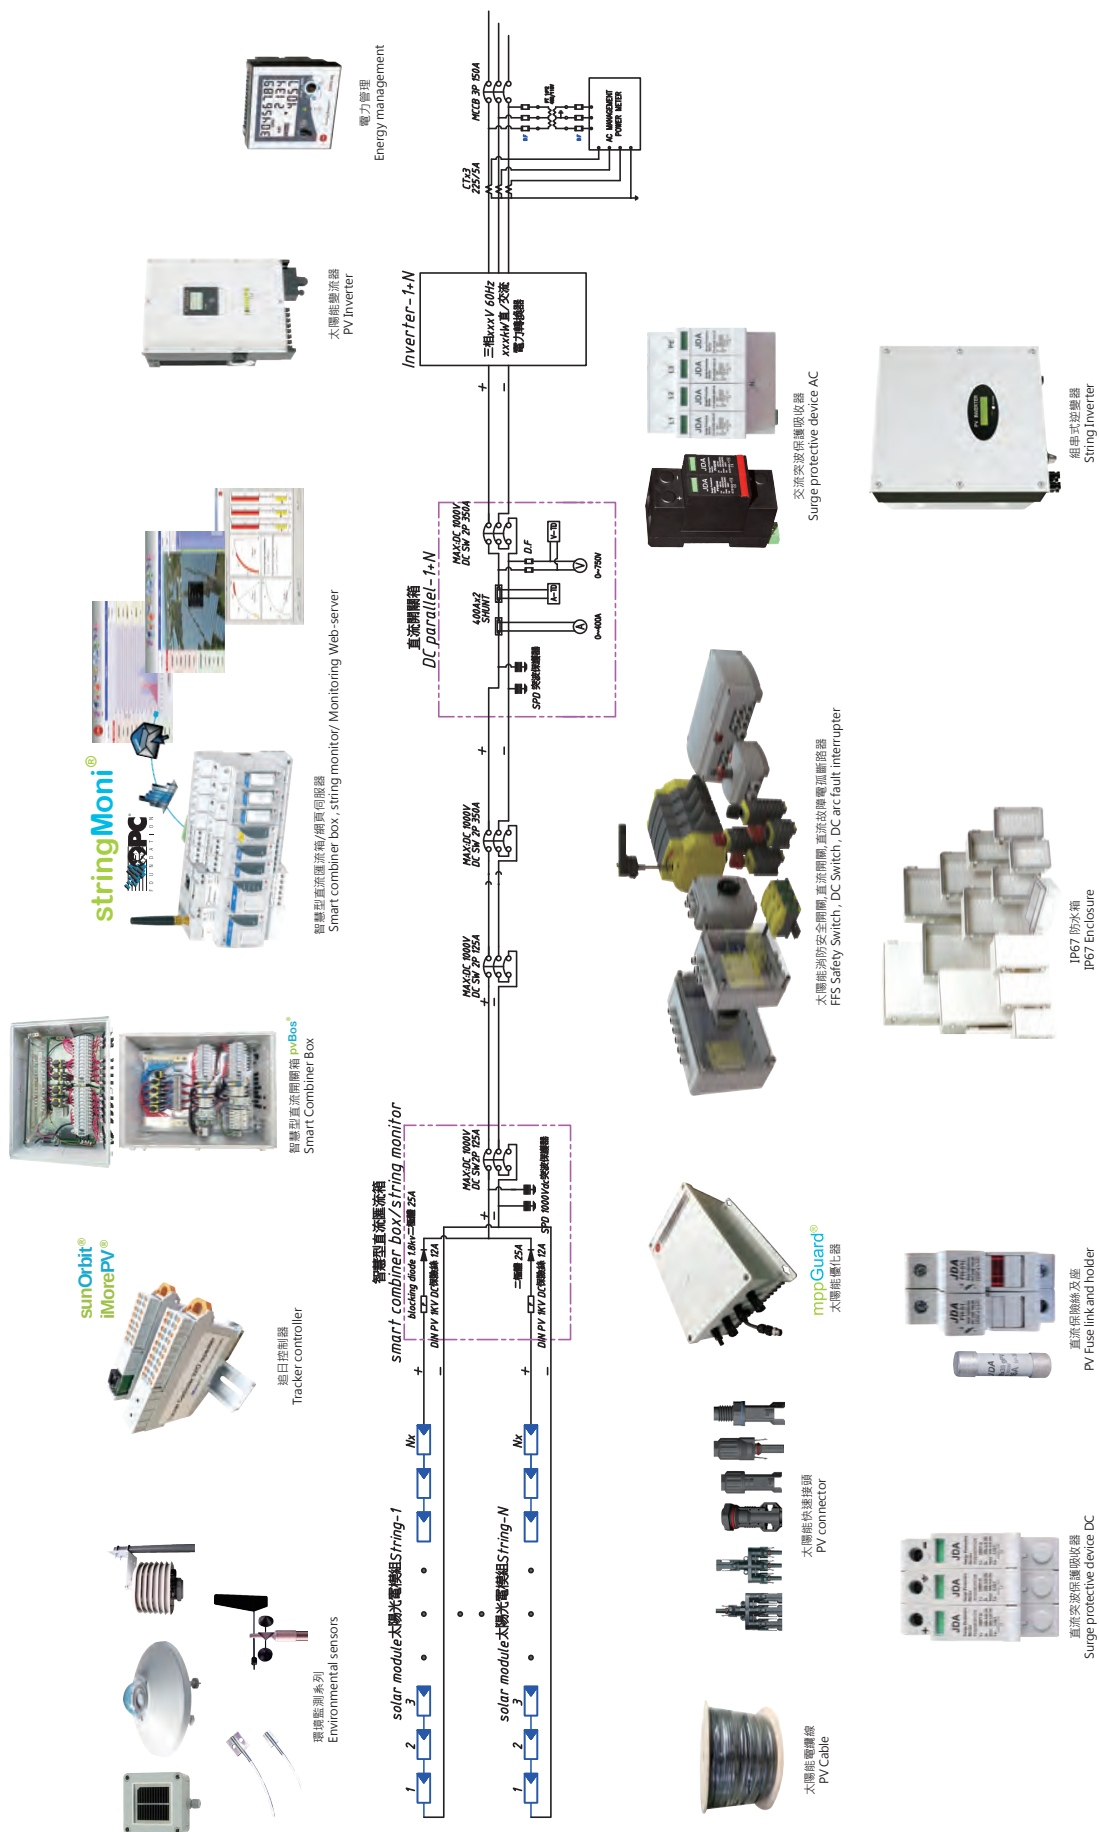



Pyranometer

日照計 LP 03/03AC/Pyrsi-03 矽晶日照計

日照計

Typical sensitivity : 10MV/(W/m²), output : 4-20mA, Measuring range : 0 ~ 2000W/m², for Pyrasi-03, 0-1500w/m², Operating temperature: -40°C ~ 60°C, Fully comply with

ISO 9060 second class standards.

全天空輻射計：ISO 9060 等級II・量測範圍0-2000W/M²・輸出4-20mA・操作溫度-40~+60°C・反應<30秒。



Portable pyranometer

攜帶型日照計 LP 471 + Pyra 03.5

Type : LP 471 PYRA 03.5 + HD2302, Typical sensitivity : 10MV/(W/m²), Spectral field : 305nm ~ 2800nm, Measuring range : 0 ~ 2000W/m², Viewing field : 2πsr, Operating temperature : -40°C ~ 80°C, Fully comply with ISO 9060 second class standards.

靈敏度：10uA/(W/m²)・光譜範圍：305nm ~ 2800nm・量測範圍：0 ~ 2000W/m², 監測角度：2πsr・工作溫度：-40°C ~ 80°C・符合ISO9060 second class 標準。



SolmoTemp / Solar module surface temperature sensor

薄片型溫度感測器 TS-01系列

表面溫度センサー

PT100 3 wire surface temperature sensor for solar module temperature sensing.

厚度3mm × 長50mm × 寬50mm・線長 1.5~3米(長度另可客製)・量測範圍：20°C ~ 150°C・輸入型式3 wire PT100。



Data Network Protector for high-frequency signal transmission

戶外型溫溼度信號傳送器TS-3200

溫濕度トランスミッター

Measuring range : 0~100%RH, -40~+100°C, output : 4-20mA two wire, power : 12-36VDC > 150mA, ingress protection : IP65.

測量範圍：0~100%RH, -40~+100°C・訊號輸出：4-20mA two wire・電壓供給：12-36VDC > 150mA・防護等級：ABS 耐候外殼 IP65。



Wind speed and Direction

風速風向計DNAxxx#C

風速計

Wind speed : 0-60m/s, Wind direction : 0-360°.

風速計：0-60m/s・風向計：0-360°。



PYRANOMETER

Class II ISO 9060

LP PYRA 03/03AC/03AV

Typical sensitivity: $10\text{mV}/(\text{W}/\text{m}^2)$, output: 4-20mA,

Measuring range: $0 \sim 2000\text{W}/\text{m}^2$,

Operating temperature: $-40^\circ\text{C} \sim 60^\circ\text{C}$,

Fully comply with ISO 9060 second class standards




型號 Model	LP PYRA 03	LP PYRA 03 AC	LP PYRA 03 AV
電源 Power	10...30Vdc	10...30Vdc	10...30Vdc, 15...30Vdc 輸出 0...10Vdc
輸出信號 Output signal	$10\mu\text{V}=1\text{W}/\text{m}^2$ $2000\text{W}/\text{m}^2=0.02\text{V}$	4...20mA $4\text{mA}=0\text{W}/\text{m}^2$ $20\text{mA}=2000\text{W}/\text{m}^2$	0...1Vdc, 0...5Vdc, 0...10Vdc $0\text{Vdc}=0\text{W}/\text{m}^2$ $1/5/10\text{Vdc}=2000\text{W}/\text{m}^2$
靈敏度 Typical sensitivity	$10\mu\text{V}/(\text{W}/\text{m}^2)$	$10\mu\text{V}/(\text{W}/\text{m}^2)$	$10\mu\text{V}/(\text{W}/\text{m}^2)$
阻抗 Impedance	$33\Omega \dots 45\Omega$	$33\Omega \dots 45\Omega$	$33\Omega \dots 45\Omega$
測量範圍 Measuring range	$0 \dots 2000\text{W}/\text{m}^2$	$0 \dots 2000\text{W}/\text{m}^2$	$0 \dots 2000\text{W}/\text{m}^2$
視場 Viewing field	$2\pi\text{sr}$	$2\pi\text{sr}$	$2\pi\text{sr}$
光譜範圍 Spectral field	305nm...2800nm(50%)	305nm...2800nm(50%)	305nm...2800nm(50%)
操作溫度 Operating temperature	$-40^\circ\text{C} \dots +80^\circ\text{C}$	$-40^\circ\text{C} \dots +80^\circ\text{C}$	$-40^\circ\text{C} \dots +80^\circ\text{C}$
響應時間(95%) Response time (95%)	<30 sec	<30 sec	<30 sec
熱輻射響應($200\text{W}/\text{m}^2$) Response to thermal radiation ($200\text{W}/\text{m}^2$)	25W/m	25W/m	25W/m
溫度變化的響應5K/h Response to temperature change 5K/h	$<I \pm 6 I \text{ W}/\text{m}^2$	$<I \pm 6 I \text{ W}/\text{m}^2$	$<I \pm 6 I \text{ W}/\text{m}^2$
一年後非穩定性 Non stability over 1 year	$<I \pm 2.5 I \%$	$<I \pm 2.5 I \%$	$<I \pm 2.5 I \%$
非線性 Non linearity	$<I \pm 2 I \%$	$<I \pm 2 I \%$	$<I \pm 2 I \%$
餘弦響應 Spectral selectivity	$<I \pm 22 I \text{ W}/\text{m}^2$	$<I \pm 22 I \text{ W}/\text{m}^2$	$<I \pm 22 I \text{ W}/\text{m}^2$
光譜選擇 Response with regard to temperature	$<I \pm 7 I \%$	$<I \pm 7 I \%$	$<I \pm 7 I \%$
溫度響應 Tilt-response	<8%	<8%	<8%
Tilt響應 Risposta in funzione del Tilt	$<I \pm 4 I \%$	$<I \pm 4 I \%$	$<I \pm 4 I \%$
連接線 Cable	CP AA1.5(5m)/CP AA1.10(10m)	CP AA1.5(5m)/CP AA1.10(10m)	CP AA1.5(5m)/CP AA1.10(10m)

表面溫度貼片 Solmo Temp

高精度超導 TS-01 系列

TS-01S

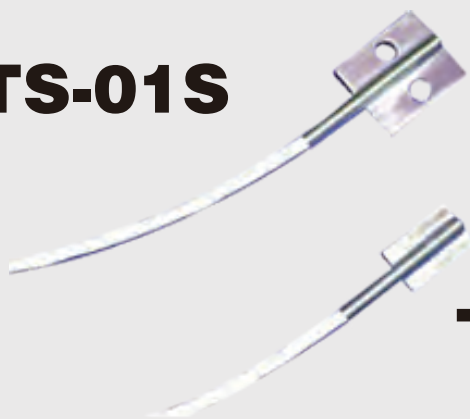

TS-01A

適用：

各種金屬、塑膠和不規則表面測溫及半導體面板、太陽能板、氣象觀測等。

- 使用溫度範圍：-40~+250℃。(可訂製更高溫型)
- 精確度：DIN IEC751 A Class。
- 超導測溫反應快速、精確度高。
- 易於安裝，耐惡劣環境及化學物。

主要規格

外 型：TS-01A 貼附式 / TS-01S 螺絲固定式
感溫元件：PT100Ω class A；亦可訂購各式測溫體或熱電偶型式
貼片尺寸：TS-01A型：10 × 16mm · t = 1mm
TS-01S型：19 × 22mm · t = 1.5mm
反應速度：約15秒 ※ 表面完全密貼狀況下
導熱係數：低於100℃ · $\geq 0.8W/mk$ · 高於120℃ · $> 1.5w/mk$ ASTM D5470
延伸信號線：耐候型鐵氟龍線；亦可訂製信號線材質、長度


選購方式

測溫元件種類： A、白金 PT100Ω/50Ω/1000Ω DIN-Class A
B、熱電偶K、J、E、T、N
導 線 種 類： 1、PVC導線
2、矽膠導線
(長度可指定) 3、鐵氟龍導線


安裝方式

a.耐溫超強背膠 b.白鐵固定夾 c.高溫鋁膠帶 d.螺絲固定孔

TS-01S

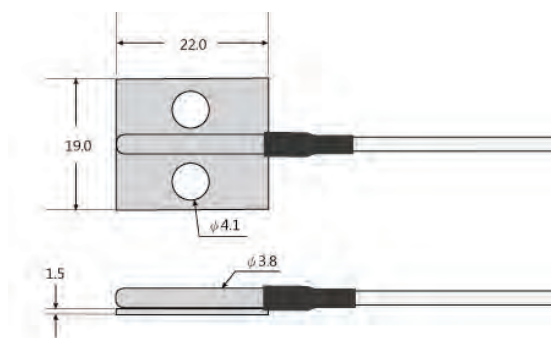

TS-01A

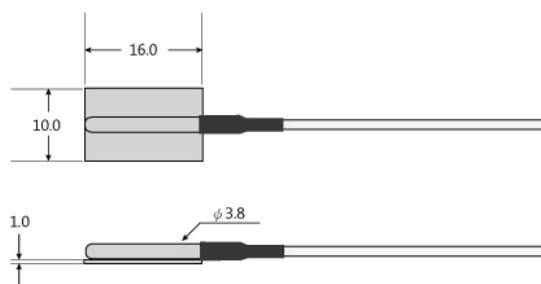

溫溼度信號傳送器 戶外型


TH-3200 series



適用於戶外環境監控、溫室、農業、船運、氣象資料收集、氣候實驗及工業應用之程序控制等。

TRH-3200 series is specially designed to prevent various difficult climates, ensure rapid response and long-term use since it takes advantage of remarkably convection structure of radiation multi-wing and outdoor climate-bear design. At aspects of installation, disassembly, wiring and adjustment, it's more convenient and speedy than other brands.

- 多翼型對流板、防雨、耐候、防止輻射熱。
- 反應迅速、高精度、信號穩定。
- 可選購電流輸出型或電壓輸出型。
- 設計精巧、美觀、容易安裝。



測量範圍 Measurement Range	0 ~ 100 %RH 0 ~ 100°C · -20 ~ +80°C · 0 ~ 50°C · -40 ~ +60°C · 或者其它規格可訂製。
精確度 Accuracy (At 25°C)	±2 %RH · ±0.3°C
穩定條件 Long-term stability	一年內漂移小於 1% RH · (正常使用於安定、無污染環境中)
溫度補償 Temp. Compensation	±0.008 %RH /°C (Effect @ 0% RH)
反應時間 Response	15秒內 (90% at + 25°C in moving air>0.5 M/S)
感測器 Sensors	濕度: Thin-film capacitor 溫度: RTD Pt 100Ω DIN, IEC 751
訊號輸出 Output	電流輸出型(A Type) 溫度: 4 ~ 20 mA Two wire 濕度: 4 ~ 20 mA Two wire 電壓輸出型(V Type) 可選購 0 to 1 V · 0 to 2V · 0 to 5 V · 0 to 10 V或1 to 5V 輸出
電壓供給 Power Supply	12 ~ 36 V DC > 150mA
感測器保護 Housing / Protection	裝置於戶外用多翼輻射耐候盒 · 內置防塵、防干擾過濾罩。
主器外殼 Internal transmitter	ABS耐候外殼 · 防護等級 IP65°
結線器 Cable gland	防水型快速結線器及端子座 · 適用結線外徑: φ5 ~ 10 mm°
主器周圍環境溫度 Ambient Temperature	-40 ~ +85°C · (-40 ~ +185)°F
重量 Weight	約 1500公克
外型及尺寸 Dimensions (不含固定座)	210 (L) × 185 (W) × 210 (H) mm 基座具固定孔

訂購說明 [例] TH-3203A: 溫、濕度傳送器 · 電流輸出型。

機 型 代 號	功 能 內 容	
TH-3201	Temperature Transmitter	溫度信號傳送器
TH-3202	Humidity Transmitter	濕度信號傳送器
TH-3203	Temp./ Humi Transmitter	溫、濕度信號傳送器
輸 出	A	Current Output 電流輸出型
	V	Voltage Output 電壓輸出型

※以上規格內容之修改、變更，將不另行通知。

Wind speed&direction (wind cup and vane)

Models				
	Combined Wind speed and Direction sensors Combined wind speed and wind direction sensor. Direct signal output for wind speed (Hz) and wind direction (0-1 Vdc). This sensor range includes, in a single apparatus, transducers for both wind speed and wind direction measurement. Its use simplifies installation requirements, other than being smaller, lighter and cheaper than the general 2-sensor kit. Model DNA122#S is equipped with a potentiometer and its wind direction output is in Ω , with very low power consumption and it can be used in applications with limited energy availability.			
Order numb.	DNA121#C	DNA122#C	DNA821	DNA827
WS output	0÷833 Hz		4÷20 mA	0÷5 Vdc
WD output	0-1 Vdc	0-2000 Ω	4÷20 mA	0÷5 Vdc
Power supply	12 Vdc		10÷30 Vac/dc	
Power consumption	30 mA	2 mA	0,5 W	
Wind direction principle	Hall effect sensor	2 K Ω potentiom.	Hall effect sensor	
Microprocessor	-	-	PIC 18F2620	
Data logger compatibility	M-Log (ELO007-008) R-Log (ELR515), E-Log (all models)			

Common features.		
Wind speed	Principle	N.32 step optoelectronic disk
	Measuring range	0-60 m/s
	Uncertainty	0÷3 m/s=1,5%, >3 m/s= 1%
	Threshold	0,26 m/s
	Delay distance	4,8 m (at 10 m/s). Acc to VDI3786 and ASTM 5096-96
	Resolution	0,07 m/s
Wind direction	Principle	See table above
	Measuring range	0-360° (0-355° DNA122#C)
	Uncertainty	1%
	Threshold	0,15 m/s
	Resolution	0,3°
	Delay distance	1,2 m (at 10 m/s). Acc to VDI3786 and ASTM 5366-96
General Information	Damping coeff.	0,21 (at 10 m/s). Acc to VDI3786 and ASTM 5096-96
	Connector	7 pin IP65 watertight connector
	Housing	Anodized aluminum,
	Cup	PA6 plastic and fiberglass
	Vane	Aluminum
	Mounting	Mast $\varnothing$ 48 ÷ 50 mm
	Protections	Tranzorb and Emifilters
	Operative temperature	>-30°C (without ice)

Accessories	Order numb	
	DZC405	Calibration certificate Includes in DNA121#C and DNA122#C
	DWA510	Cable L.= 10 m
	DWA525	Cable L.= 25 m
	DWA526	Cable L.= 50 m
	DWA527	Cable L.= 100 m
	MG2251	7 pin free female connector
	DNA124	Spare part: rotor
	DNA127	Spare part: vane
	MM2011	Spare part: bearings for Wind direction (QT.2 required)
	MM2020	Spare part: bearing for Wind speed (QT.2 required)



Fuse holder 1000Vdc 直流保險絲座 FH-01 DC ヒューズホルダー

直流熔絲座：1000Vdc 30A，操作度-20 ~ +70C, IEC60947-1/3
適用直流保險絲：900Vdc (900Vdc, Tested 1000Vdc) 1,2,4,6,8,10,12,16, 20,25,30A 10x38mm。



gPV fuse link 直流保險絲 gPV ヒューズ

直流保險絲：1000Vdc tested 1000Vdc：1,2,4,6,8,10,12,16,20,25,30A, 10 x 38mm.
1000Vdc：1,2,4,6,8,10,12,16,20,25A, 10 x 38mm.
1000Vdc：1,2,4,6,10,16,20,25,32,40,50, 22 x 127 mm.
IEC60269-6。



DC arc fault interrupter 太陽能直流電弧偵測 DCアーク検出器

DC arc fault interrupter, in according to NEC690, Detects fast current changes within the solar power plant, as they are caused by arcs and generates an electrical signal. The electrical signal can be individually processed, message, siren motor-switch or relay contact (active fire safety). Combinable with other products. DIN rail mount in combiner box, or PCB box. 測試標準依據UL1699B(DC專用為UL1699B,(非AC的UL1699, 二者不同)偵測同極串聯、二個反極性之間、同極併聯或對地之間的併聯電弧故障。與消防安全開關內置電弧偵測或與直流系統絕緣監測器或模組短路開關一起配置。長期監測因接線未牢固、風壓震動導致接觸鬆動、或電纜絕緣老化產生電弧而發生火災。



DC Switch disconnect 直流開關 XA type / XB type DCスイッチ

16~2000Amp, 600-1000Vdc, Passed UL, IEC, KEMA, CE, BC, CSA, CCC safety standard. 16~2000Amp, 600-1000Vdc, 通過UL、IEC、KEMA、CE、BC、CSA、CCC認證，雙軸非同步儲能驅動，雙刀圓盤接點橋，無伸張電弧，可安全的直接電壓下使用，自我清潔接點，高速氣流冷卻技術，符合國際環保規定，不含鉛鎘，體積小，多種安裝選擇。



DC MCCB / DC Switch 直流斷路器 DC遮斷機

DC MCCB：500~1000V, 16~2000A, DC Switch：500~1000V, 16~2000A · TUV 直流斷路器：500~1000V, 16~2000A。



SOLAR PV FUSE HOLDER FOR CYLINDRICAL FUSE-LINKS SIZE 10x38, DC DESIGN




- Fuse disconnectors FH are intended for cylindrical fuse-links size 10x38.
- Fuse disconnectors FH can be sealed in the closed state.
- The devices are designed as modular for 45 mm cut out in the switchboard.



Dimensions

FH01 /Din rail mounting

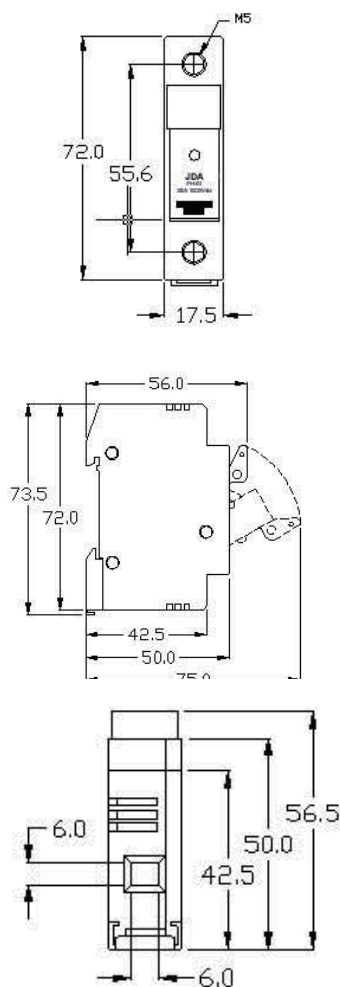

Part No	I _n [A]	Rate Voltage	Number of poles	Package[pcs]
FH-01	30	1000Vdc	1	12
FH-01L	30	1000Vdc	1	12

Note: FH-01-L with status light, without status light FH-01

Parameters		
Rated operating current	I _e	30 A
Rated operating voltage	U _e	1000 V d.c.
Utilization category		DC-20B
Rated insulation voltage	U _i	1000 V d.c. ⁽¹⁾
Rated pulse withstand voltage	U _{imp}	4KV
Fuse-link	Diameter x length	10x38
Max. rated current of the fuse-link		30A
Max. power losses of the fuse-link		3W
Rated short-time withstand current	I _{cw} 1s	1.6KA
Electrical endurance (operating cycles)		300
Mechanical endurance (operating cycles)		1700
Degree of protection, cover closed		IP20
Degree of protection, cover opened		IP20
Connection cross-section		Cu/0.5÷25mm ² (2x16mm ²)
Torque		2 Nm
Operating ambient temperature	t	-25÷+55℃
Max. sea level		2000m
Material body and handle		thermoplastic high resistance to the temperature,PBT
Flammability		UL 94 - V0
Glow Wire Test		IEC 60695 , 960 °C
Colour		Ral 7035
Material of contacts		electrolytic silver plated copper or Phosphor bronze.
Standards		IEC 60947-1,-3 ; EN 60947-1,-3


Note: (1) also suitable for 695Vac. application

CH 10 gPV - Fuse - links

General characteristics		UL file: E347771
Rated voltage	1000V d.c. L/R=2ms	
Breaking capacity	10kA d.c. / 30kA d.c.	
Standards	UL 2579, UL 248-1	
Application	For protection of photovoltaic modules.	



CH 10x38 gPV										
Size	I _n [A]	Code No. "standard contacts" 10kA UL	Code No. "standard contacts" 30kA IEC	Code No. "type SU contacts" 30kA IEC	Pre-arcing Joule integral [A ² s] L/R=2ms	Operating Joule integral [A ² s] L/R=2ms	Power dissipation [0,7 x I _n] P _d [W]	Power dissipa- tion [I _n] P _d [W]	Weight [g]	Packaging [pcs]
10 x 38	0,5		002625134	002625131	0,016	0,068	0,2	0,52	10/12	10/500 SU:10/380
	1		002625138	002625129	1,5	3	0,42	1,0		
	2	002625101	002625065	002625115	1,7	2,3	0,47	1,12		
	3	002625100	002625067	002625113	2,8	5,4	0,65	1,6		
	3,5	002625135	002625068	002625127	2,5	7	0,57	1,4		
	4	002625102	002625069	002625116	3,9	11,7	0,52	1,25		
	5	002625111	002625070	002625124	8	21	0,63	1,49		
	6	002625103	002625071	002625117	10,6	34,6	0,73	1,75		
	7	002625110	002625072	002625114	16	60	0,74	1,74		
	8	002625104	002625073	002625118	17	65	0,8	1,9		
	10	002625105	002625075	002625119	8,3	33	0,97	2,4		
	12	002625106	002625077	002625120	22	73	0,8	1,9		
	13	002625137	002625078	002625128	21	70	1,0	2,3		
	14	002625136	002625079	002625126	28	92	1,3	3,0		
	15	002625112	002625080	002625125	49	145	1,0	2,2		
	16	002625107	002625081	002625121	48	147	1,1	2,6		
	20	002625108	002625085	002625122	86	245	1,3	3,2		
	25*		002625109	002625123	125	289	1,65	4,1		
	25		002625139	002625140	110	470	1,65	4,1		

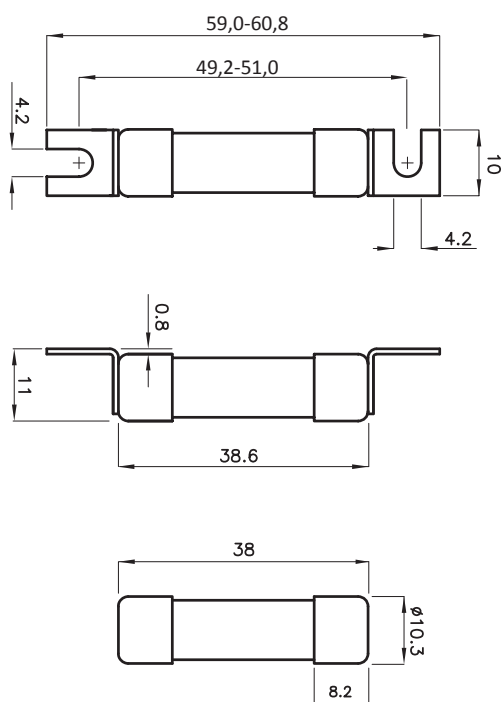

Standard
Contacts



Type SU
Contacts



IEC60947 額定開關

電壓 (伏) DC21 IEC 60947 *1	電流	路数 *2	H *3	產品型號			
				底部安裝 B	單孔安裝		
					面板安裝 P	面板反安裝 R	雙側安裝 D
600	16	2	2	X60.16B2	X60.16P2	X60.16R2	X60.16D2
600	16	4	4	X60.16B4	X60.16P4	X60.16R4	X60.16D4
600	16	6	6	X60.16B6	X60.16P6	X60.16R6	X60.16D6
600	16	8	8	X60.16B8	X60.16P8	X60.16R8	X60.16D8
850	16	2	2	X85.16B2	X85.16P2	X85.16R2	X85.16D2
850	16	4	4	X85.16B4	X85.16P4	X85.16R4	X85.16D4
850	16	6	6	X85.16B6	X85.16P6	X85.16R6	X85.16D6
850	16	8	8	X85.16B8	X85.16P8	X85.16R8	X85.16D8
1000	16	2	3	X100.16B2	X100.16P2	X100.16R2	X100.16D2
1000	16	4	6	X100.16B4	X100.16P4	X100.16R4	X100.16D4
1000	16	6	9	X100.16B6	X100.16P6	X100.16R6	X100.16D6
600	25	2	2	X60.25B2	X60.25P2	X60.25R2	X60.25D2
600	25	4	4	X60.25B4	X60.25P4	X60.25R4	X60.25D4
600	25	6	6	X60.25B6	X60.25P6	X60.25R6	X60.25D6
600	25	8	8	X60.25B8	X60.25P8	X60.25R8	X60.25D8
750	25	2	2	X75.25B2	X75.25P2	X75.25R2	X75.25D2
750	25	4	4	X75.25B4	X75.25P4	X75.25R4	X75.25D4
750	25	6	6	X75.25B6	X75.25P6	X75.25R6	X75.25D6
750	25	8	8	X75.25B8	X75.25P8	X75.25R8	X75.25D8
1000	25	2	3	X100.25B2	X100.25P2	X100.25R2	X100.25D2
1000	25	4	6	X100.25B4	X100.25P4	X100.25R4	X100.25D4
1000	25	6	9	X100.25B6	X100.25P6	X100.25R6	X100.25D6
600	32	2	2	X60.32B2	X60.32P2	X60.32R2	X60.32D2
600	32	4	4	X60.32B4	X60.32P4	X60.32R4	X60.32D4
600	32	6	6	X60.32B6	X60.32P6	X60.32R6	X60.32D6
1000	32	2	3	X100.32B2	X100.32P2	X100.32R2	X100.32D2
1000	32	4	6	X100.32B4	X100.32P4	X100.32R4	X100.32D4
1000	40	2~8P	3	X100.40B2~8	P2~8	R2~8	P2~8
1500	50	2~8P	6	XC(50.50B)2~8	P2~8	R2~8	P2~8

UL508 RATED SWITCHES (cCSAus)

電壓 (伏) UL508	電流 (安) 極點	H *3	極點 雙 開關	底部安裝 *4	面板安裝 *4	極點 單 開關	底部安裝 *4	面板安裝 *4
				B	P		B	P
600	16	2	2	X60.16BK2	X60.16PK2	1	X60.16BKS1	X60.16PKS1
600	16	4	4	X60.16BK4	X60.16PK4	2	X60.16BKS2	X60.16PKS2
600	16	6	6	X60.16BK6	X60.16PK6	3	X60.16BKS3	X60.16PKS3
600	16	8	8	X60.16BK8	X60.16PK8	4	X60.16BKS4	X60.16PKS4
600	25	2	2	X60.25BK2	X60.25PK2	1	X60.25BKS1	X60.25PKS1
600	25	4	4	X60.25BK4	X60.25PK4	2	X60.25BKS2	X60.25PKS2
600	25	6	6	X60.25BK6	X60.25PK6	3	X60.25BKS3	X60.25PKS3
600	25	8	8	X60.25BK8	X60.25PK8	4	X60.25BKS4	X60.25PKS4
600	32	2	2	X60.32BK2	X60.32PK2	1	X60.32BKS1	X60.32PKS1
600	32	4	4	X60.32BK4	X60.32PK4	2	X60.32BKS2	X60.32PKS2
600	32	6	6	X60.32BK6	X60.32PK6	3	X60.32BKS3	X60.32PKS3
600	32	8	8	X60.32BK8	X60.32PK8	4	X60.32BKS4	X60.32PKS4

*1 提供組合交流極點開關

*2 無輔助觸點的主極點數。


*3 開關總高度可根據“H”層的数量決定。安裝B和D類型需要增加一層。見第6頁示意圖。

*4 “R”和“D”兩種安裝方法（見第6頁）也已獲得認證。

*5 CSA認證為32安培，UL認證為30安培

輔助觸點

輔助觸點可用於位置指示器或電機驅動開關。輔助觸點額定工作條件為250伏交流和直流電壓，16安。為每一輔助觸點增加額外層以決定開關高度。

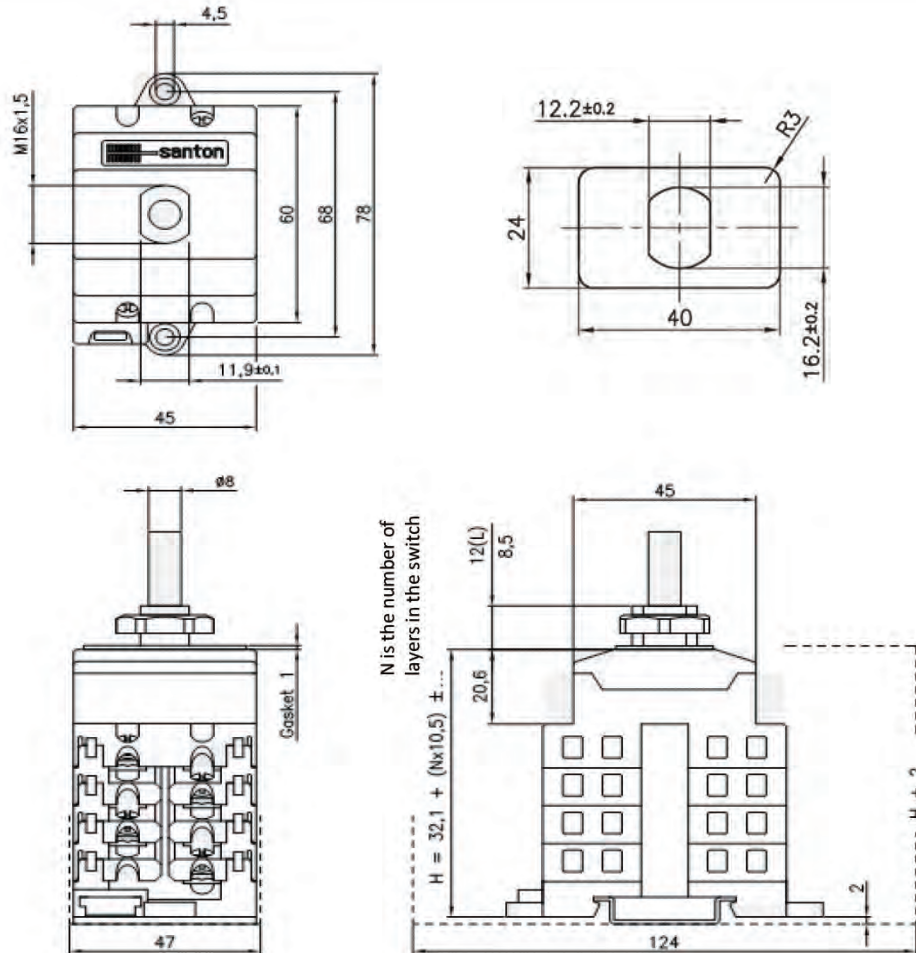

Mounting instructions


In the application all ratings have to be respected. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards. The terminals, without interconnection can take copper wires up to 6 mm². The recommended Spade Tongue Terminals may have a maximum width of 9 mm. For CSA and UL applications, registered Spade Tongue Terminals must be used. The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco). After mounting, the wiring must be checked and the switch must operate smoothly.

Maintenance


The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85 °C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.


A type knob




D type knob





B type knob



O type knob



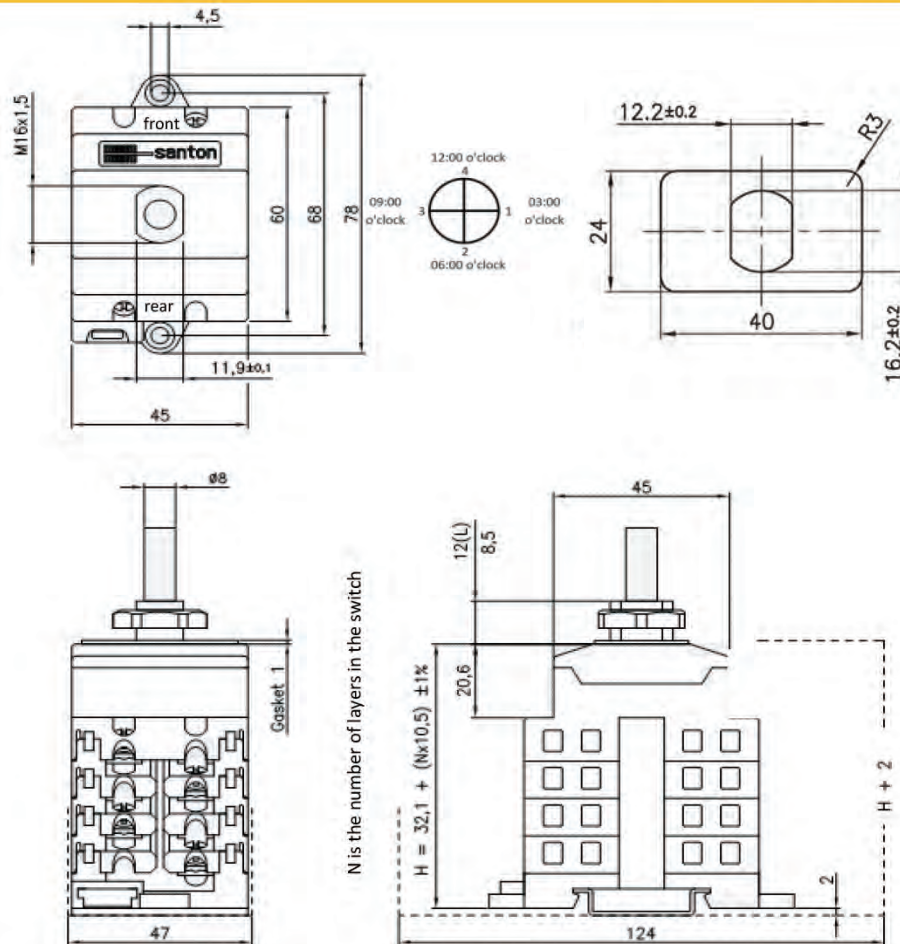

Mounting instructions

In the application all ratings according to the datasheet have to be respected. After mounting, the wiring must be checked and the switch must operate smoothly. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards.

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85 °C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Connection details

Description	Symbol	Values				Unit
Rated operational current (DC poles)	Ie	16	20	25	32	A dc
Required fine wire cross-section (minimal): IEC60947-1, table 9	A	2,5	4	4	6	mm ²
max power dissipation	P	1,9	3,0	4,8	7,8	W

The terminals, without interconnection can take copper wires up to 6 mm².

The recommended Spade Tongue Terminals may have a maximum width of 9 mm.

For CSA and UL applications, registered Spade Tongue Terminals must be used.

The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco).

Registered Spade Tongue Terminals

Recommend Manufacturer	Type number	Wire size (AWG)	Wire size (mm ²)	Color
JST	FVD2-YS4A	AWG 16 – AWG 14	1,0 – 2,5 mm ²	Blue
TE connectivity	C-165012	AWG 16 – AWG 14	1,0 – 2,5 mm ²	Blue
Vogt	3635c	AWG 16 – AWG 14	1,5 – 2,5 mm ²	Blue
TE connectivity	C-165015	AWG 12 - AWG 10	3,0 - 6,0 mm ²	Yellow
Vogt	3652c / 3653c	AWG 12 - AWG 10	3,0 - 6,0 mm ²	Yellow
Santon (JST)	52A1256.35	AWG 8 - AWG 10	10,5mm ² -16mm ² *1	*2

*1 16mm² only with fine stranded wire or two 6mm² is also possible

*2 Optional: A yellow finger safe sleeve for the Spade Tongue Terminal (Santon 52A1256.35) can be ordered under item number 52A1564.00



Data Sheet

Santon X-Type switch XA100.16DL6E-A

Switch disconnecter for solar application according to
IEC 60947-1&3 by Dekra (KEMA) and CCC (CQC)



Empty for better insulation
N = number of contact layer



Terminals Scheme									
Layer No.	Front Side		Symbol	Rear Side		On Positions			
	Left	Right		Left	Right	1	2	3	4
7	-3		— / —	+3		X			
6		+3	— / —		+3	X			
5	+2		— / —	+2		X			
4		-2	— / —		-2	X			
3	-1		— / —	-1		X			
2		+1	— / —		+1	X			
1			empty						

Contacts are made in "X" marked position.

Symbols for interconnection: [

Technical data	Symbol	Merit	Unit
rated operational voltage (DC poles)	Ue	1000	V dc
rated operational current (DC poles)	Ie	16	A dc
rated operational voltage (second rating DC poles, if requested)	Ue	850	V dc
rated operational current (second rating DC poles, if requested)	Ie	20	A dc
rated operational voltage (third rating DC poles, if requested)	Ue	800	V dc
rated operational current (third rating DC poles, if requested)	Ie	25	A dc
method of mounting	both bottom and single hole mounting [D] long gland		
number of DC poles		6	
utilization category DC	DC-21B		
actuator	standard black [A]		
positions	OFF at 12 hr, ON at 3 hr [E]		
rated impulse withstand voltage	Uimp	8	kV
insulation voltage	Ui	1000	V
rated thermal current uninterrupted duty	Iu	25	A
rated short-time withstand current (1s)	Icw	750	A
rated short-circuit making capacity	Icm	1,4	kA
rated conditional short-circuit current		5	kA
max power dissipation		2,6	W
method of operation	independent manual operation		
minimum required dimensions of enclosures L x W x H*		124 x 47 x 105,5	mm
* see the drawing for the height of the switch. The number of layers N is:		7	
Enclosure depth from inside bottom to outside top, required for the switch and knob		138,5	mm
knob operation force		max. 1,4	Nm
tightening torque terminal screws M4 , min. - max.		1,5 1,7	Nm
tightening torque panel mounting nut, min. - max.		2,0 2,5	Nm
tightening torque M3 screw in the standard black knob, min. - max.		0,5 0,7	Nm
minimum required fine wire cross-section: IEC60947-1, table 9		4	mm ²
ambient temperature allowed between		- 20 to + 70 °C	°C
storage temperature allowed between		- 40 to + 80 °C	°C
maximum relative humidity, without condensation at 20 °C		90	%
pollution degree		2	
IP rating terminals		IP20	
IP rating gland of the shaft in case of single hole panel mounting		IP65	
rated operational voltage (AC poles)	Ue		V ac
rated operational current (AC poles)	Ie		A ac
number of AC poles			
minimum required fine wire cross-section: IEC60947-1, table 9			mm ²
auxiliary contact(s), AC15			No auxiliary contact
auxiliary contact ratings			
weight		315	g

Data Sheet

Santon X-Type switch XA100.16DL8E-A

Switch disconnecter for solar application according to IEC 60947-1&3 by Dekra (KEMA) and CCC (CQC)



Empty for better insulation
N = number of contact layer

Terminals Scheme									
Layer No.	Front Side		Symbol	Rear Side		On Positions			
	Left	Right		Left	Right	1	2	3	4
9	+4			+4			X		
8		-4			-4		X		
7	-3			-3			X		
6		+3			+3		X		
5	+2			+2			X		
4		-2			-2		X		
3	-1			-1			X		
2		+1			+1		X		
1			Empty						

Contacts are made in "X" marked position.
Symbols for interconnection: [

Technical data	Symbol	Merit	Unit	
rated operational voltage (DC poles)	Ue		1000	V dc
rated operational current (DC poles)	Ie		16	A dc
rated operational voltage (second rating DC poles, if requested)	Ue		850	V dc
rated operational current (second rating DC poles, if requested)	Ie		20	A dc
rated operational voltage (third rating DC poles, if requested)	Ue		800	V dc
rated operational current (third rating DC poles, if requested)	Ie		25	A dc
rated operational voltage (fourth rating DC poles, if requested)	Ue		650	V dc
rated operational current (fourth rating DC poles, if requested)	Ie		32	A dc
method of mounting	both bottom and single hole mounting [D]			
number of DC poles				8
utilization category DC	DC-21B			
actuator	standard black [A]			
positions	OFF at 12 hr, ON at 3 hr [E]			
rated impulse withstand voltage	Uimp		8	kV
insulation voltage	Ui		1000	V
rated thermal current uninterrupted duty	Iu		25	A
rated short-time withstand current (1s)	Icw		750	A
rated short-circuit making capacity	Icm		1,4	kA
rated conditional short-circuit current				5 kA
method of operation	independent manual operation			
minimum required dimensions of enclosures L x W x H* (on DIN-rail H = +2mm) {space envelope}				124 x 47 x 126,6 mm
* see the drawing for the height of the switch. The number of layers N is:				9
knob operation force			max.	1,4 Nm
tightening torque terminal screws M4 , min. - max.			1,5	1,7 Nm
tightening torque panel mounting nut, min. - max.			2,0	2,5 Nm
tightening torque M3 screw in the standard black knob, min. - max.			0,5	0,7 Nm
ambient temperature allowed between				- 25 to + 70 °C
storage temperature allowed between				- 40 to + 80 °C
maximum relative humidity, without condensation at 20°C				90 %
pollution degree				2
IP rating terminals				IP20
IP rating gland of the shaft in case of single hole panel mounting				IP65
rated operational voltage (AC poles)	Ue			V ac
rated operational current (AC poles)	Ie			A ac
number of AC poles (for general use)				
minimum required fine wire cross-section: IEC60947-1, table 9				mm2
auxiliary contact(s), AC15	No auxiliary contact			
auxiliary contact ratings				
weight				384 g



Data Sheet

Santon X-Type switch XA100.16DL12E-A

Switch disconnecter for solar application according to
IEC 60947-1&3 by Dekra (KEMA) and CCC (CQC)



Empty for better insulation
N = number of contact layer

Terminals Scheme									
Layer No.	Front Side		Symbol	Rear Side		On Positions			
	Left	Right		Left	Right	1	2	3	4
13	+6			+6		X			
12		-6			-6	X			
11	-5			-5		X			
10		+5			+5	X			
9	+4			+4		X			
8		-4			-4	X			
7	-3			-3		X			
6		+3			+3	X			
5	+2			+2		X			
4		-2			-2	X			
3	-1			-1		X			
2		+1			+1	X			
1			empty						

Contacts are made in "X" marked position.


Symbols for interconnection: [

Technical data	Symbol	Merit	Unit
rated operational voltage (DC poles)	Ue	1000	V dc
rated operational current (DC poles)	Ie	16	A dc
rated operational voltage (second rating DC poles, if requested)	Ue	850	V dc
rated operational current (second rating DC poles, if requested)	Ie	20	A dc
rated operational voltage (third rating DC poles, if requested)	Ue	800	V dc
rated operational current (third rating DC poles, if requested)	Ie	25	A dc
rated operational voltage (fourth rating DC poles, if requested)	Ue	650	V dc
rated operational current (fourth rating DC poles, if requested)	Ie	32	A dc
method of mounting	both bottom and single hole mounting [D]		
number of DC poles		12	
utilization category DC	DC-21B		
actuator	standard black [A]		
positions	OFF at 12 hr, ON at 3 hr [E]		
rated impulse withstand voltage	Uimp	8	kV
insulation voltage	Ui	1000	V
rated thermal current uninterrupted duty	Iu	25	A
rated short-time withstand current (1s)	Icw	750	A
rated short-circuit making capacity	Icm	1,4	kA
rated conditional short-circuit current		5	kA
method of operation	independent manual operation		
minimum required dimensions of enclosures L x W x H* (on DIN-rail H = +2mm)		124 x 47 x 168,6	mm
* see the drawing for the height of the switch. The number of layers N is:		13	
knob operation force		max.	1,4 Nm
tightening torque terminal screws M4 , min. - max.		1,5	1,7 Nm
tightening torque panel mounting nut, min. - max.		2,0	2,5 Nm
tightening torque M3 screw in the standard black knob, min. - max.		0,5	0,7 Nm
ambient temperature allowed between		- 40 to + 70	°C
storage temperature allowed between		- 40 to + 80	°C
maximum relative humidity, without condensation at 20°C		90	%
pollution degree		2	
IP rating terminals		IP20	
IP rating gland of the shaft in case of single hole panel mounting		IP65	
rated operational voltage (AC poles)	Ue		V ac
rated operational current (AC poles)	Ie		A ac
number of AC poles (for general use)			
minimum required fine wire cross-section: IEC60947-1, table 9			mm2
auxiliary contact(s), AC15		No auxiliary contact	
auxiliary contact ratings			
weight		522	g
accessories:			

Data Sheet

Santon X-Type switch

XA100.25DL2E-A

Switch disconnecter for solar application according to
IEC 60947-1&3 by Dekra (KEMA)Empty for better insulation
N = number of contact layer

Terminals Scheme

Layer No.	Front Side Left	Front Side Right	Symbol	Rear Side Left	Rear Side Right	On Positions 1	On Positions 2	On Positions 3	On Positions 4
4			-1		-1				X
3					+1				X
2					+1				X
1			empty						

Contacts are made in "X" marked position.

Symbols for interconnection: [

Technical data	Symbol	Merit	Unit
rated operational voltage (DC poles)	Ue	1000	V dc
rated operational current (DC poles)	Ie	25	A dc
rated operational voltage (second rating DC poles, if requested)	Ue	0	V dc
rated operational current (second rating DC poles, if requested)	Ie	0	A dc
rated operational voltage (third rating DC poles, if requested)	Ue	0	V dc
rated operational current (third rating DC poles, if requested)	Ie	0	A dc
method of mounting	both bottom and single hole mounting [D] long gland		
number of DC poles		2	
utilization category DC	DC-21B		
actuator	ordered without a knob		
positions	OFF at 9 hr, ON at 12 hr [H]		
rated impulse withstand voltage	Uimp	8	kV
insulation voltage	Ui	1000	V
rated thermal current uninterrupted duty	Iu	25	A
rated short-time withstand current (1s)	Icw	750	A
rated short-circuit making capacity	Icm	1,4	kA
rated conditional short-circuit current		5	kA
resistance per contact		0,5	mΩ
method of operation	independent manual operation		
minimum required dimensions of enclosures L x W x H*		124 x 47 x 74	mm
* see the drawing for the height of the switch. The number of layers N is:		4	
Shaft length			mm
Enclosure depth from inside bottom to outside top, required for the switch and knob		107	mm
tightening torque terminal screws M4, min. - max.	1,5	1,7	Nm
tightening torque panel mounting nut, min. - max.	2,0	2,5	Nm
tightening torque M3 screw in the standard black knob, min. - max.	0,5	0,7	Nm
minimum required fine wire cross-section: IEC60947-1, table 9		4	mm ²
ambient temperature allowed between		- 20 to + 70 °C	°C
storage temperature allowed between		- 40 to + 80 °C	°C
maximum relative humidity, without condensation at 20 °C		90	%
pollution degree		2	
IP rating terminals		IP20	
IP rating gland of the shaft in case of single hole panel mounting		IP65	
rated operational voltage (AC poles)	Ue		V ac
rated operational current (AC poles)	Ie		A ac
number of AC poles			
auxiliary contact(s), AC15		No auxiliary contact	
auxiliary contact ratings			
weight		221	g
accessories:			



Data Sheet

Santon X-Type switch XA100.25DL4E-A

Switch disconnecter for solar application according to IEC 60947-1&3 by Dekra (KEMA) and CCC (CQC)



Empty for better insulation
N = number of contact layer



Terminals Scheme									
Layer No.	Front Side		Symbol	Rear Side		On Positions			
	Left	Right		Left	Right	1	2	3	4
7				+2		X			
6					+2	X			
5	-2			-2		X			
4		-1			-1	X			
3				+1		X			
2					+1	X			
1			empty						

Contacts are made in "X" marked position.

Symbols for interconnection: [

Technical data	Symbol	Merit	Unit
rated operational voltage (DC poles)	Ue		1000 V dc
rated operational current (DC poles)	Ie		25 A dc
rated operational voltage (second rating DC poles, if requested)	Ue		850 V dc
rated operational current (second rating DC poles, if requested)	Ie		20 A dc
rated operational voltage (third rating DC poles, if requested)	Ue		800 V dc
rated operational current (third rating DC poles, if requested)	Ie		25 A dc
rated operational voltage (fourth rating DC poles, if requested)	Ue		650 V dc
rated operational current (fourth rating DC poles, if requested)	Ie		32 A dc
method of mounting	both bottom and single hole mounting [D]		
number of DC poles			4
utilization category DC			
actuator	standard black [A]		
positions	OFF at 12 hr, ON at 3 hr [E]		
rated impulse withstand voltage	Uimp		8 kV
insulation voltage	Ui		1000 V
rated thermal current uninterrupted duty	Iu		25 A
rated short-time withstand current (1s)	Icw		750 A
rated short-circuit making capacity	Icm		1,4 kA
rated conditional short-circuit current			5 kA
method of operation	independent manual operation		
minimum required dimensions of enclosures L x W x H* (on DIN-rail H = +2mm) (space envelope)			124 x 47 x 105,6 mm
* see the drawing for the height of the switch. The number of layers N is:			7
knob operation force		max.	1,4 Nm
tightening torque terminal screws M4 , min. - max.		1,5	1,7 Nm
tightening torque panel mounting nut, min. - max.		2,0	2,5 Nm
tightening torque M3 screw in the standard black knob, min. - max.		0,5	0,7 Nm
ambient temperature allowed between			- 25 to + 70 °C
storage temperature allowed between			- 40 to + 80 °C
maximum relative humidity, without condensation at 20 °C			90 %
pollution degree			2
IP rating terminals			IP20
IP rating gland of the shaft in case of single hole panel mounting			IP65
rated operational voltage (AC poles)	Ue		V ac
rated operational current (AC poles)	Ie		A ac
number of AC poles (for general use)			
minimum required fine wire cross-section: IEC60947-1, table 9			mm ²
auxiliary contact(s), AC15			No auxiliary contact
auxiliary contact ratings			
weight			315 g
accessories:			

Data Sheet

Santon X-Type switch X100.40DL4E-A

Switch disconnecter for solar application according to
IEC 60947-1&3 by Dekra (KEMA) and CCC (CQC)Empty for better insulation
N = number of contact layer

Terminals Scheme									
Layer No.	Front Side		Symbol	Rear Side		On Positions			
	Left	Right		Left	Right	1	2	3	4
7				+2				X	
6					+2			X	
5	-2			-2				X	
4		-1			-1			X	
3				+1				X	
2					+1			X	
1			empty						

Contacts are made in "X" marked position.

Symbols for interconnection: [








Technical data	Symbol	Merit	Unit
rated operational voltage (DC poles)	Ue	1000	V dc
rated operational current (DC poles)	Ie	40	A dc
rated operational voltage (second rating DC poles, if requested)	Ue		V dc
rated operational current (second rating DC poles, if requested)	Ie		A dc
rated operational voltage (third rating DC poles, if requested)	Ue		V dc
rated operational current (third rating DC poles, if requested)	Ie		A dc
rated operational voltage (fourth rating DC poles, if requested)	Ue		V dc
rated operational current (fourth rating DC poles, if requested)	Ie		A dc
method of mounting	both bottom and single hole mounting [D]		
number of DC poles		4	
utilization category DC	DC-21B		
actuator	standard black [A]		
positions	OFF at 12 hr, ON at 3 hr [E]		
rated impulse withstand voltage	Uimp	8	kV
insulation voltage	Ui	1000	V
rated thermal current uninterrupted duty	Iu	40	A
rated short-time withstand current (1s)	Icw	750	A
rated short-circuit making capacity	Icm	1.4	kA
rated conditional short-circuit current		5	kA
method of operation	independent manual operation		
minimum required dimensions of enclosures L x W x H* (on DIN-rail H = +2mm) (space envelope)		124 x 47 x 105.6	mm
* see the drawing for the height of the switch. The number of layers N is:		7	
knob operation force	max.	1.4	Nm
tightening torque terminal screws M4, min. - max.	1.5	1.7	Nm
tightening torque panel mounting nut, min. - max.	2.0	2.5	Nm
tightening torque M3 screw in the standard black knob, min. - max.	0.5	0.7	Nm
ambient temperature allowed between		- 40 to + 70	°C
storage temperature allowed between		- 40 to + 80	°C
maximum relative humidity, without condensation at 20°C		90	%
pollution degree		2	
IP rating terminals		IP20	
IP rating gland of the shaft in case of single hole panel mounting		IP65	
rated operational voltage (AC poles)	Ue		V ac
rated operational current (AC poles)	Ie		A ac
number of AC poles (for general use)			
minimum required fine wire cross-section: IEC60947-1, table 9			mm ²
auxiliary contact(s), AC15		No auxiliary contact	
auxiliary contact ratings			
weight		315	g
accessories:			




Data Sheet

XB0210/2

Certified for IEC 60947 1&3
DC21B and CCC (CQC)

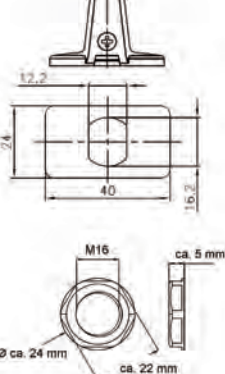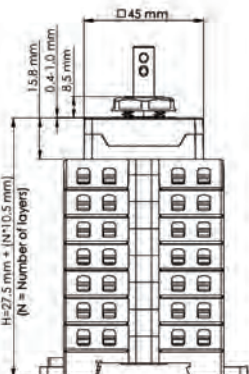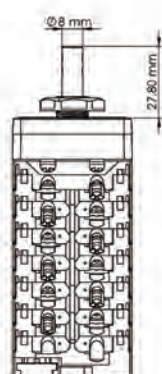

Empty for better insulation
N = number of contact layer



Technical data	Symbol	Ratings:	I	II	III	IV	V	Unit
Rated operational voltage	Ue		1000	850	800	650	400	V dc
Rated operational current	Ie		16	20	25	30	45	A dc
Required fine wire cross-section (minimal)*:			2,5	4,0	4,0	6,0	10,0	mm²
*IEC60947-1, table 9								
Number of DC poles							2	
Utilization category DC							DC-21B	
Pollution degree							2	
IP rating terminals							IP20	
Tightening torque terminal screws M4 (min. - max.)						1,5	- 1,7	Nm
Method of mounting								
IP rating of the shaft in case of single hole and four hole panel mounting							IP65	
Positions							12 (OFF) and 3 o'clock (ON)	
Actuator							Standard A knob with long screw to fix in shaft	
Method of operation							Independent manual operation	
Actuator operation force (max.)							1,4	Nm
Tightening torque M3 screw in the actuator (min. - max.)							0,2 - 0,4	Nm
Rated impulse withstand voltage		Uimp					8	kV
Insulation voltage		Ui					850	V
Rated thermal current uninterrupted duty		Iu					45	A
Rated short-time withstand current (1s)		Icw					700	A
Rated short-circuit making capacity		Icm					1,4	kA
Rated conditional short-circuit current		Isc					5	kA
Minimum required dimensions of enclosures L x W x D* {space envelope}			124	x	47	x	50	mm
* see the drawing for the height of the switch. The number of layers N is:							2	
Weight							ca. 149	g
Allowed ambient temperature (min. - max.)		T _{ambient}					-40 - 70	°C
Allowed storage temperature (min. - max.)		T _{storage}					-40 - 85	°C
Relative humidity (max.), without condensation at 20°C		RH					90	%

Terminals Scheme									
Layer	Front Side	Rear Side	Symbol	Left	Right	1	2	3	4
No.	Left	Right							
7									
6									
5									
4									
3	-1					I			0
2		+1					I		0
1			Empty						

(I = Contact is closed, O = Contact is open)

Mounting instructions

In the application all ratings according to the datasheet have to be respected. After mounting, the wiring must be checked and the switch must operate smoothly. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards.

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.
- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Connection

The terminals, can take copper wires up to 6 mm².
The recommended Spade Tongue Terminals may have a maximum width of 9 mm (see table for recommendations)


Recommend Manufacturer	Type number	Wire size (AWG)	Wire size (mm²)	Color
JST	FVD2-YS4A	AWG 16 - AWG 14	1,0 - 2,5 mm²	Blue
TE connectivity	C-165012	AWG 16 - AWG 14	1,0 - 2,5 mm²	Blue
Vogt	3635c	AWG 16 - AWG 14	1,5 - 2,5 mm²	Blue
TE connectivity	C-165015	AWG 12 - AWG 10	3,0 - 6,0 mm²	Yellow
Vogt	3652c / 3653c	AWG 12 - AWG 10	3,0 - 6,0 mm²	Yellow
Santon (JST)	52A1256.35	AWG 8 - AWG 10	10,5mm²-16mm² *1	*2

*1 16mm² only with fine stranded wire (or two times 6mm²)







*2 Optional: A yellow finger safe sleeve for the Spade Tongue Terminal (Santon 52A1256.35) can be ordered under item number 52A1564.00

Data Sheet


XB0310/2

Certified for IEC 60947 1&3
DC21B and CCC (CQC)

Mentioned rating counts when two poles (+ -) are applied, if there are two negative poles intended to combine in one terminal deck, then the maximal allowable current (A) has to be respected.
This means the maximal allowable current has to be split by 2 (with 2 poles combined).

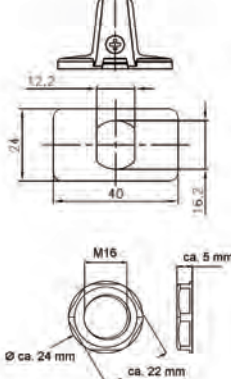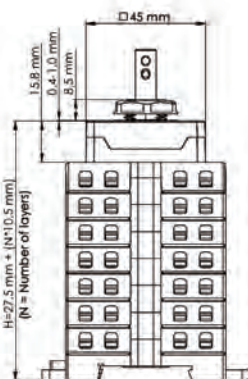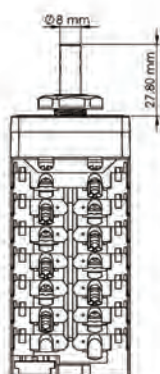

Empty for better insulation
N = number of contact layer



Technical data	Symbol	Ratings:	I	II	III	IV	V	Unit
Rated operational voltage	Ue		1000	850	800	650	400	V dc
Rated operational current	Ie		16	20	25	30	45	A dc
Required fine wire cross-section (minimal)*:			2,5	4,0	4,0	6,0	10,0	mm²
*IEC60947-1, table 9								
Number of DC poles							3	
Utilization category DC							DC-21B	
Pollution degree							2	
IP rating terminals							IP20	
Tightening torque terminal screws M4 (min. - max.)						1,5	- 1,7	Nm
Method of mounting								
IP rating of the shaft in case of single hole and four hole panel mounting							IP65	
Positions							12 (OFF) and 3 o'clock (ON)	
Actuator							Standard A knob with long screw to fix in shaft	
Method of operation							Independent manual operation	
Actuator operation force (max.)							1,4	Nm
Tightening torque M3 screw in the actuator (min. - max.)							0,2 - 0,4	Nm
Rated impulse withstand voltage	Uimp						8	kV
Insulation voltage	Ui						850	V
Rated thermal current uninterrupted duty	Iu						45	A
Rated short-time withstand current (1s)	Icw						700	A
Rated short-circuit making capacity	Icm						1,4	kA
Rated conditional short-circuit current	Isc						5	kA
Minimum required dimensions of enclosures L x W x D* (space envelope)			124	x	47	x	60	mm
* see the drawing for the height of the switch. The number of layers N is:							3	
Weight							ca. 180	g
Allowed ambient temperature (min. - max.)	T _{ambient}						-40 - 70	°C
Allowed storage temperature (min. - max.)	T _{storage}						-40 - 85	°C
Relative humidity (max.), without condensation at 20°C	RH						90	%

Terminals Scheme									
Layer	Front Side	Rear Side	Symbol	Left	Right	1	2	3	4
No.	Left	Right							
7									
6									
5									
4		+2			+2	I			0
3	-				-	I			0
2	+1				+1	I			0
1			Empty						

(I = Contact is closed, O = Contact is open)

Mounting instructions

In the application all ratings according to the datasheet have to be respected. After mounting, the wiring must be checked and the switch must operate smoothly. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards.

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.
- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Connection

The terminals, can take copper wires up to 6 mm².
The recommended Spade Tongue Terminals may have a maximum width of 9 mm (see table for recommendations)

Recommend Manufacturer	Type number	Wire size (AWG)	Wire size (mm²)	Color
JST	FVD2-YS4A	AWG 16 - AWG 14	1,0 - 2,5 mm²	Blue
TE connectivity	C-165012	AWG 16 - AWG 14	1,0 - 2,5 mm²	Blue
Vogt	3635c	AWG 16 - AWG 14	1,5 - 2,5 mm²	Blue
TE connectivity	C-165015	AWG 12 - AWG 10	3,0 - 6,0 mm²	Yellow
Vogt	3652c / 3653c	AWG 12 - AWG 10	3,0 - 6,0 mm²	Yellow
Santon (JST)	52A1256.35	AWG 8 - AWG 10	10,5mm²-16mm² *1	*2

*1 16mm² only with fine stranded wire (or two times 6mm²)

*2 Optional: A yellow finger safe sleeve for the Spade Tongue Terminal (Santon 52A1256.35) can be ordered under item number 52A1564.00

Superior Switch Solutions








XB0310-2 (050916 1604).xlsx




Data Sheet

XB0410/2

Certified for IEC 60947 1&3
DC21B and CCC (CQC)

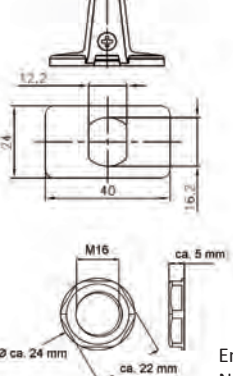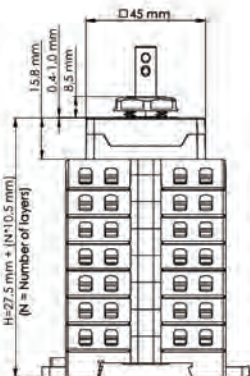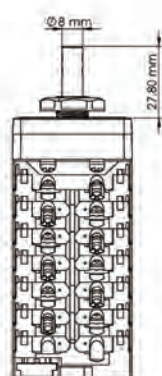

Empty for better insulation
N = number of contact layer



Technical data	Symbol	Ratings:	I	II	III	IV	V	Unit
Rated operational voltage	Ue		1000	850	800	650	400	V dc
Rated operational current	Ie		16	20	25	30	45	A dc
Required fine wire cross-section (minimal)*:			2,5	4,0	4,0	6,0	10,0	mm²
*IEC60947-1, table 9								
Number of DC poles							4	
Utilization category DC							DC-21B	
Pollution degree							2	
IP rating terminals							IP20	
Tightening torque terminal screws M4 (min. - max.)						1,5	- 1,7	Nm
Method of mounting								
IP rating of the shaft in case of single hole and four hole panel mounting								IP65
Positions							12 (OFF) and 3 o'clock (ON)	
Actuator							Standard A knob with long screw to fix in shaft	
Method of operation							Independent manual operation	
Actuator operation force (max.)							1,4	Nm
Tightening torque M3 screw in the actuator (min. - max.)						0,2	- 0,4	Nm
Rated impulse withstand voltage	Uimp						8	kV
Insulation voltage	Ui						850	V
Rated thermal current uninterrupted duty	Iu						45	A
Rated short-time withstand current (1s)	Icw						700	A
Rated short-circuit making capacity	Icm						1,4	kA
Rated conditional short-circuit current	Isc						5	kA
Minimum required dimensions of enclosures L x W x D* {space envelope}			124	x	47	x	71	mm
* see the drawing for the height of the switch. The number of layers N is:							4	
Weight							ca. 211	g
Allowed ambient temperature (min. - max.)	T _{ambient}					-40	- 70	°C
Allowed storage temperature (min. - max.)	T _{storage}					-40	- 85	°C
Relative humidity (max.), without condensation at 20°C	RH						90	%

Terminals Scheme									
Layer No.	Front Side Left	Front Side Right	Symbol	Rear Side Left	Rear Side Right	Positions 1	Positions 2	Positions 3	Positions 4
7									
6									
5	+2			+2		I			0
4		-2			-2	I			0
3	-1			-1		I			0
2		+1			+1	I			0
1			Empty						

(I = Contact is closed, O = Contact is open)

Mounting instructions

In the application all ratings according to the datasheet have to be respected. After mounting, the wiring must be checked and the switch must operate smoothly. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards.

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.
- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Connection

The terminals, can take copper wires up to 6 mm². The recommended Spade Tongue Terminals may have a maximum width of 9 mm (see table for recommendations)

Recommend Manufacturer	Type number	Wire size (AWG)	Wire size (mm²)	Color
JST	FVD2-YS4A	AWG 16 – AWG 14	1,0 – 2,5 mm²	Blue
TE connectivity	C-165012	AWG 16 – AWG 14	1,0 – 2,5 mm²	Blue
Vogt	3635c	AWG 16 – AWG 14	1,5 – 2,5 mm²	Blue
TE connectivity	C-165015	AWG 12 – AWG 10	3,0 – 6,0 mm²	Yellow
Vogt	3652c / 3653c	AWG 12 – AWG 10	3,0 – 6,0 mm²	Yellow
Santon (JST)	52A1256.35	AWG 8 – AWG 10	10,5mm²-16mm² *1	**2

*1 16mm² only with fine stranded wire (or two times 6mm²)

**2 Optional: A yellow finger safe sleeve for the Spade Tongue Terminal (Santon 52A1256.35) can be ordered under item number 52A1564.00

Superior Switch Solutions








XB0410-2 (050916 1605).xlsx




Data Sheet

XB0610/2

Certified for IEC 60947 1&3
DC21B and CCC (CQC)

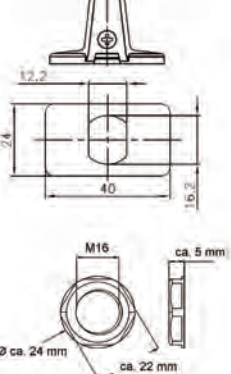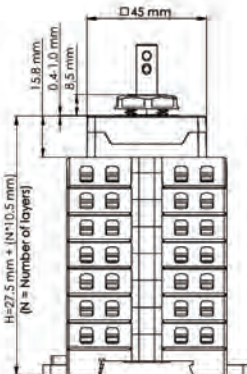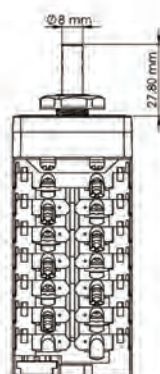

Empty for better insulation
N = number of contact layer



Technical data	Symbol	Ratings:	I	II	III	IV	V	Unit
Rated operational voltage	Ue		1000	850	800	650	400	V dc
Rated operational current	Ie		16	20	25	30	45	A dc
Required fine wire cross-section (minimal)*:			2,5	4,0	4,0	6,0	10,0	mm ²
*IEC60947-1, table 9								
Number of DC poles							6	
Utilization category DC							DC-21B	
Pollution degree							2	
IP rating terminals							IP20	
Tightening torque terminal screws M4 (min. - max.)						1,5	- 1,7	Nm
Method of mounting								
IP rating of the shaft in case of single hole and four hole panel mounting							IP65	
Positions							12 (OFF) and 3 o'clock (ON)	
Actuator							Standard A knob with long screw to fix in shaft	
Method of operation							Independent manual operation	
Actuator operation force (max.)							1,4	Nm
Tightening torque M3 screw in the actuator (min. - max.)							0,2 - 0,4	Nm
Rated impulse withstand voltage	Uimp						8	kV
Insulation voltage	Ui						850	V
Rated thermal current uninterrupted duty	Iu						45	A
Rated short-time withstand current (1s)	Icw						700	A
Rated short-circuit making capacity	Icm						1,4	kA
Rated conditional short-circuit current	Isc						5	kA
Minimum required dimensions of enclosures L x W x D* (space envelope)							124 x 47 x 92	mm
* see the drawing for the height of the switch. The number of layers N is:							6	
Weight							ca. 274	g
Allowed ambient temperature (min. - max.)	T _{ambient}						-40 - 70	°C
Allowed storage temperature (min. - max.)	T _{storage}						-40 - 85	°C
Relative humidity (max.), without condensation at 20°C	RH						90	%

Terminals Scheme									
Layer No.	Front Side Left	Front Side Right	Symbol	Rear Side Left	Rear Side Right	Positions 1	Positions 2	Positions 3	Positions 4
7	-3			-3		I			0
6		+3			+3	I			0
5	+2			+2		I			0
4		-2			-2	I			0
3	-1			-1		I			0
2		+1			+1	I			0
1			Empty						

(I = Contact is closed, O = Contact is open)

Mounting instructions

In the application all ratings according to the datasheet have to be respected. After mounting, the wiring must be checked and the switch must operate smoothly. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards.

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.
- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Connection

The terminals, can take copper wires up to 6 mm².
The recommended Spade Tongue Terminals may have a maximum width of 9 mm (see table for recommendations)

Recommend Manufacturer	Type number	Wire size (AWG)	Wire size (mm ²)	Color
JST	FVD2-YS4A	AWG 16 - AWG 14	1,0 - 2,5 mm ²	Blue
TE connectivity	C-165012	AWG 16 - AWG 14	1,0 - 2,5 mm ²	Blue
Vogt	3635c	AWG 16 - AWG 14	1,5 - 2,5 mm ²	Blue
TE connectivity	C-165015	AWG 12 - AWG 10	3,0 - 6,0 mm ²	Yellow
Vogt	3652c / 3653c	AWG 12 - AWG 10	3,0 - 6,0 mm ²	Yellow
Santon (JST)	52A1256.35	AWG 8 - AWG 10	10,5mm ² -16mm ² *1	*2

*1 16mm² only with fine stranded wire (or two times 6mm²)

*2 Optional: A yellow finger safe sleeve for the Spade Tongue Terminal (Santon 52A1256.35) can be ordered under item number 52A1564.00




- MCCB is suitable for DC application such as Photovoltaic Circuit Breaker, UPS and datacenter
- DC short circuit test tested by VDE
- Higher nominal voltage range up to 1000 VDC
- Rated Current : 16A~800A
- No of Pole : 2/3/4Pole
- Available for AC/DC application



		TD100	TD160			TS100		
Frame size (AF)		100	160			100		
Rated current, In (A)		16, 20, 25, 32, 40, 50, 63, 80, 100	100, 125, 160			40, 50, 63, 80, 100		
No. of Poles (Pole)		2, 3, 4	2, 3, 4			2, 3, 4		
Rating (DC)	1000V	4P	4P			4P		
	750V							
	500V							
Rated service breaking (DC)	Type	N	H	L	N	H	L	N
	1000V (4P)	42	65	100	42	65	100	50
	750V (3P)	42	65	100	42	65	100	50
	500V (2P)	42	65	100	42	65	100	50
FTU ((fixed-thermal, fixed-magnetic)		●	●	●	●	●	●	●
FMU (adjustable-thermal, fixed-magnetic)		●	●	●	●	●	●	●
ATU (adjustable-thermal, adjustable-magnetic)		-	-	-	-	-	-	-

Exemplary circuit diagrams

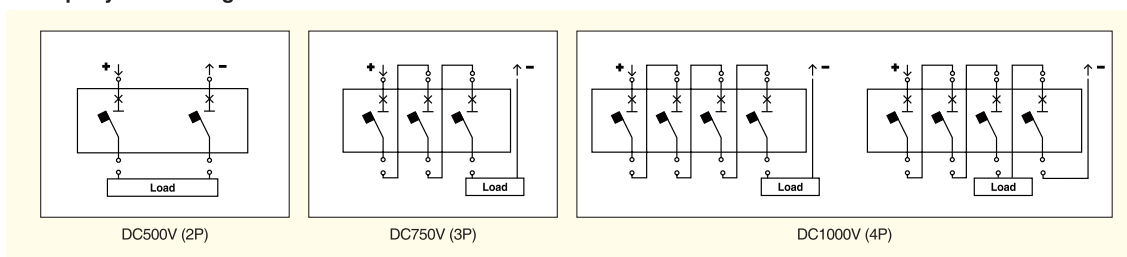

TS160			TS250			TS400			TS630			TS800		
160			250			400			630			800		
100, 125, 160			125, 160, 200, 250			300, 400			500, 630			700, 800		
2, 3, 4			2, 3, 4			2, 3, 4			2, 3, 4			2, 3, 4		
4P			4P			4P			4P			4P		
3P			3P			3P			3P			3P		
2P			2P			2P			2P			2P		
N	H	L	N	H	L	N	H	L	N	H	L	N	H	L
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●



- Susol MCCB is suitable for DC application such as Photovoltaic Circuit Breaker, UPS and datacenter
- DC short circuit test tested by VDE
- Higher nominal voltage range up to 1000 VDC
- Rated Current : 16A~800A
- No of Pole: 2/3/4Pole
- Available for AC/DC application




TS160			TS250			TS400			TS630			TS800		
160			250			400			630			800		
100, 125, 160			125, 160, 200, 250			300, 400			500, 630			700, 800		
2, 3, 4			2, 3, 4			2, 3, 4			2, 3, 4			2, 3, 4		
4P			4P			4P			4P			4P		
3P			3P			3P			3P			3P		
2P			2P			2P			2P			2P		
N	H	L	N	H	L	N	H	L	N	H	L	N	H	L
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Trip unit identification



Model S5000 1000V DC21B



S5000 DC 1000 V				開關 O-I On-Off switch	直接手柄 direct handle Direct handle	外部手柄 External handle			軸外伸部 Shaft extensions						
				4P ^{*(1)}	藍色/Blue	藍色/Blue			型號 1/Type 1			型號 2/Type 2			
Ue (Vdc)	安培 Amps	規格 Size	連接 Connection	型號 Code	型號 Code	型號 Code	L (mm)	P (mm)	型號 Code	L (mm)	P (mm)	型號 Code	L (mm)	P (mm)	
900	DC21B	40	0		S5-01604PB0	DS-SI01	DS-SA01	177	85... 195,5	DS-EP04	250	90... 263	DS-EP05	347	90... 400
		40	0		S5-01604PS0	DS-SI01	DS-SA01	177	85... 195,5	DS-EP04	250	90... 263	DS-EP05	347	90... 400
		100	1		S5-01254PR0	DS-SI11	DS-SA11	227	103... 256	DS-EP14	376	108... 400	DS-EP15	536	108... 560
		160	1		S5-02004PR0	DS-SI11	DS-SA11	227	103... 256	DS-EP14	376	108... 400	DS-EP15	536	108... 560
1000	DC21B	250	1		S5-03154PR0	DS-SI11	DS-SA11	227	103... 256	DS-EP14	376	108... 400	DS-EP15	536	108... 560
		400	1		S5-04004PC0	DS-SI11	DS-SA11	227	103... 256	DS-EP14	376	108... 400	DS-EP15	536	108... 560
		500	2		S5-06304PR0	DS-LI21	DS-LA21	195	134... 240	DS-EP24	345	139... 400	DS-EP24	535	139... 560
		630	2		S5-08004PC0	DS-LI21	DS-LA21	195	134... 240	DS-EP24	345	139... 400	DS-EP24	535	139... 560
		850	3		S5-12504PC0	DS-LI31	DS-LA31	186	145... 242	DS-EP32	336	150... 400	DS-EP24	535	150... 600
		1250	4		S5-18004PS0	DS-LI41	DS-LA41	239	235... 400	DS-EP44	204	240... 440	DS-EP45	635	240... 836

^{*(1)} 4級同時斷開。

^{*(1)} 4 poles simultaneous breaking.

S5000 DC 4P		
接線圖 Connection diagram	橋式連接 / Bridging links	端子罩 / Terminal shrouds
A		
B		
C		

橋式鏈與
端子罩
Bridging links
& terminal
shrouds

接線圖
Connection
diagram

如左

S5000 DC 8P (多極)			
接線圖 Connection diagram	橋式連接 / Bridging links		端子罩 / Terminal shrouds (正面開關)
	正面開關 Frontal switch	後部開關 Rear switch	(on frontal switch only)
A			
B			
C			
D			

S5000 DC 3P + 3P			
接線圖 Connection diagram	橋式連接 / Bridging links		端子罩 / Terminal shrouds (正面開關)
	正面開關 Frontal switch	後部開關 Rear switch	(on frontal switch only)
E			
F			

S5000 DC 4P + 4P			
接線圖 Connection diagram	橋式連接 / Bridging links		端子罩 / Terminal shrouds (正面開關)
	正面開關 Frontal switch	後部開關 Rear switch	(on frontal switch only)
C			
D			



Model S5000 1000V DC21B 接線圖

S5000 DC 4P			
接線圖 Connection diagram	橋式連接 / Bridging links		端子罩 / Terminal shrouds
A			
B			
C			
S5000 DC 8P (多極)			
接線圖 Connection diagram	橋式連接 / Bridging links		端子罩 / Terminal shrouds (正面開關) (on frontal switch only)
	正面開關 Frontal switch	後部開關 Rear switch	
A			
B			
C			
D			
S5000 DC 3P + 3P			
接線圖 Connection diagram	橋式連接 / Bridging links		端子罩 / Terminal shrouds (正面開關) (on frontal switch only)
	正面開關 Frontal switch	後部開關 Rear switch	
E			
F			
S5000 DC 4P + 4P			
接線圖 Connection diagram	橋式連接 / Bridging links		端子罩 / Terminal shrouds (正面開關) (on frontal switch only)
	正面開關 Frontal switch	後部開關 Rear switch	
C			
D			

Model S5000 1000V DC21B 配件



ETL產品型號+OU
ETL product code
adding OU:

DS-CU__OU

ETL產品型號+OU ETL product code adding OU: DS-CU__OU		防護板	接線端護板(兩片) /Terminal shrouds (2 pieces) *								
		規格 0 /Size 0		規格 1 /Size 1 *		規格 2 /Size 2		規格 3 /Size 3		規格 4 /Size 4	
		接線圖		接線圖		接線圖		接線圖		接線圖	
		Diagram		Diagram		Diagram		Diagram		Diagram	
		A - B	A	B	A	B	A	B	A	B	
IEC產品型號	TOP	DS-CU01	DS-CU18	DS-CU10	DS-CU28	DS-CU20	DS-CU38	DS-CU30	DS-CU48	DS-CU40	
	BOTTOM	DS-CU01	DS-CU19	DS-CU11	DS-CU29	DS-CU21	DS-CU39	DS-CU31	DS-CU49	DS-CU41	
		C - D	C - D		C - D		C - D		C - D		
IEC產品型號	TOP	DS-CU01	DS-CU18		DS-CU28		DS-CU38		DS-CU48		
	BOTTOM	DS-CU01	DS-CU10		DS-CU20		DS-CU30		DS-CU40		
		E - F	E - F		E - F		E - F		E - F		
IEC產品型號	TOP	-	DS-CU18		DS-CU28		DS-CU38		DS-CU48		
	BOTTOM	-	DS-CU10		DS-CU20		DS-CU30		DS-CU40		

* 3P+3P, 4P+4P, 8P的端子罩僅適用於正面安裝的負荷開關 * For the switches 3P+3P, 4P+4P & 8P the shrouds can only be fitted in the frontal switch.

*(1) 連接請洽詢

*(1) Please consult for connection.



		橋式連接(兩片) / Bridging links (2 pieces)						
		規格 / Size 0		規格 / Size 1		規格 / Size 2	規格 / Size 3	規格 / Size 4
		接線圖 Diagram		接線圖 Diagram		接線圖 Diagram	接線圖 Diagram	接線圖 Diagram
		A - B	A - B	A - B	A - B	A - B	A - B	A - B
S5000 DC 4P	型號 Code	DS-PI05	DS-PI01	DS-PI11	DS-PI14	DS-PI21	DS-PI31	DS-PI41



		橋式連接(兩片或三片) / Bridging links (2/3 pieces)							
		規格 / Size 1		規格 / Size 2		規格 / Size 3		規格 / Size 4	
		接線圖 / Diagram		接線圖 / Diagram		接線圖 / Diagram		接線圖 / Diagram	
		A - B	C	A - B	B	A - B	B	A - B	B
S5000 DC 4P UL CSA	型號 Code	DS-PI120U	DS-PI130U	DS-PI220U	DS-PI230U	DS-PI320U	DS-PI330U	DS-PI420U	DS-PI430U
		A - B	C - D	A - B	C - D	A - B	C - D	A - B	C - D
S5000 DC 8P (multi-string)	型號 Code	DS-PI120U	DS-PI130U	DS-PI220U	DS-PI230U	DS-PI320U	DS-PI330U	DS-PI420U	DS-PI430U
		DS-PI170U	DS-PI160U	DS-PI270U	DS-PI260U	DS-PI370U	DS-PI360U	DS-PI470U	DS-PI460U
		E - F		E - F		E - F		E - F	
S5000 DC 3P+3P	型號 Code								
		DS-PI120U	洽詢 Consult	DS-PI220U		DS-PI320U		DS-PI420U	
		DS-PI170U	洽詢 Consult	DS-PI270U		DS-PI370U		DS-PI470U	
		C - D		C - D		C - D		C - D	
S5000 DC 4P+4P	型號 Code								
		DS-PI130U	洽詢 Consult	DS-PI230U		DS-PI330U		DS-PI430U	
		DS-PI160U	洽詢 Consult	DS-PI260U		DS-PI360U		DS-PI460U	



VIM-M master unit RS 485資料傳輸單元



Master communication capability. RS485 communication port (Modbus). Local communication bus management up to 15 mixed VIM-S, VIM-P and VIM-O unit. Two digital inputs. Two temperature inputs: PT100 or PT1000. Single virtual or real alarm set-point connectable to any available variable. Data and event stamping system Display readout: 6 DGTs. 12 to 28 VDC power supply. IP40, DIN module.

RS485資料傳輸單元：可接15個介面，2個數位輸入，2個溫度輸入Pt100 or 1000，-50~+200℃，3 wire，01℃/0.1°F，±0.5%RDG，六位數顯示個別單串之電流、電壓、功率，加總由RS485輸出，RS485 multi-drop雙向，2 wire 1000M，247位置選擇，自動位址，擷取VIM-S, VIM-P, VIM-O 訊息如：防盜、保險絲熔斷、PV接線問題，PV逆向電壓暨極性、電流、電壓、功率、日照、風速、開關或避雷狀態、自動清洗或遙控，IP40 DIN rail mount。

VIM-S string unit 1000Vdc 串列量測單元



Direct DC voltage measurement up to 1000V, Energy measurements : kWh. Direct DC current measurement up to 16A or up to 30A without fuse. Instantaneous variables data format : 4 DGTs. Energies data format : 6 DGT Instantaneous variables : V, A, W. Accuracy : Class 1 (kWh) ±0.5 RDG (current/voltage) Auxiliary power supply from VIM-M unit String alarm management by means of VIM-M unit only. Fuse blow detection by means of VIM-M unit only. PV module connection control by means of VIM-M unit only. Integrated 10.3x38mm fuse holder for string protection. IP40, DIN module.

串列即時量測單元：KWH, V, A, W 保險絲熔斷、PV接線問題，PV逆向電壓暨極性，電壓等級DC1000V，直測DC直流16A或30A，Continuous overload 1100 Vdc, for 500ms 1600Vdc, to earth 800Vdc，內置10.3*38mm fuse座，IEC60269-1，不含fuse，IP40 DIN rail mount。

VIM-P measuring unit 溫度、日照、風速量測單元



Measurements : PV module temperature, air temperature, sun irradiation, wind speed. Two temperature inputs : Pt100 or Pt1000. One 120mV or 20mA DC input with scaling capability for irradiation measurement. One pulse input for wind speed measurement. Auxiliary communication bus to VIM-M unit. Auxiliary power supply from VIM-M unit. IP40, DIN module.

溫度、日照、風速量測單元：溫度 one module Temp. input, one air Temp. input, Pt 100 or 1000，-50~+200℃，3 wire，01℃/0.1°F，±0.5%RDG，日照一個輸入，解析1W/M²，0~120mVDC±0.2%，風速一個輸入，誤差±0.02%，0-1000HZ，IP40 DIN rail mount。

VIM-O input / output unit 輸出入單元



Expansion I/O module (digital inputs and outputs). Two relay outputs managed by the VIM-M module. Two digital inputs managed by the VIM-M module. Auxiliary power supply from VIM-M module. IP40, DIN module.

輸出入單元：由VIM-M主控二個relay輸出警報，光伏模板效率改變時內建時鐘定時或遙控驅動清洗模板，二個數位輸入，偵測開關開路、閉路、避雷保護狀態經RS485傳送。

VIM-C VIM-C 網路伺服器



Four RS485 ports, three USB 2.0 ports, one ethernet ports, 100 to 240VAC power supply, Wall/DIN-rail mounting type. Plant information, plant map for failure localization, webcam management, Real-time display with alarm indication, Graphical and analytical yield trends, Alarm and events logging.

四個RS485資料傳輸埠，三個USB2.0埠，一個乙太網路埠，電源100~240VAC，壁掛式、DIN導軌安裝，電廠信息，電廠圖示故障位址，網路攝影管理，即時顯示警告指示，圖形分析收益趨勢圖、警報和事件記錄。

PSU18W, 30W, 60W 電源供應卡




PSU24181, PSU24031, PSU24061 input AC 90~265Vac DC 120~370Vdc, output 24VDC 18W Din-rail power supply.



內建30家以上協定持續增加
適合屋頂型、小 / 中 / 大型 太陽能系統專用
內建免費 OPC 伺服軟體、可整合符合 SCADA 的驅動程式、
提供所有 SCADA 系統整合廠商監測資料訊息平台。

stringMoni®
監測每一串狀態

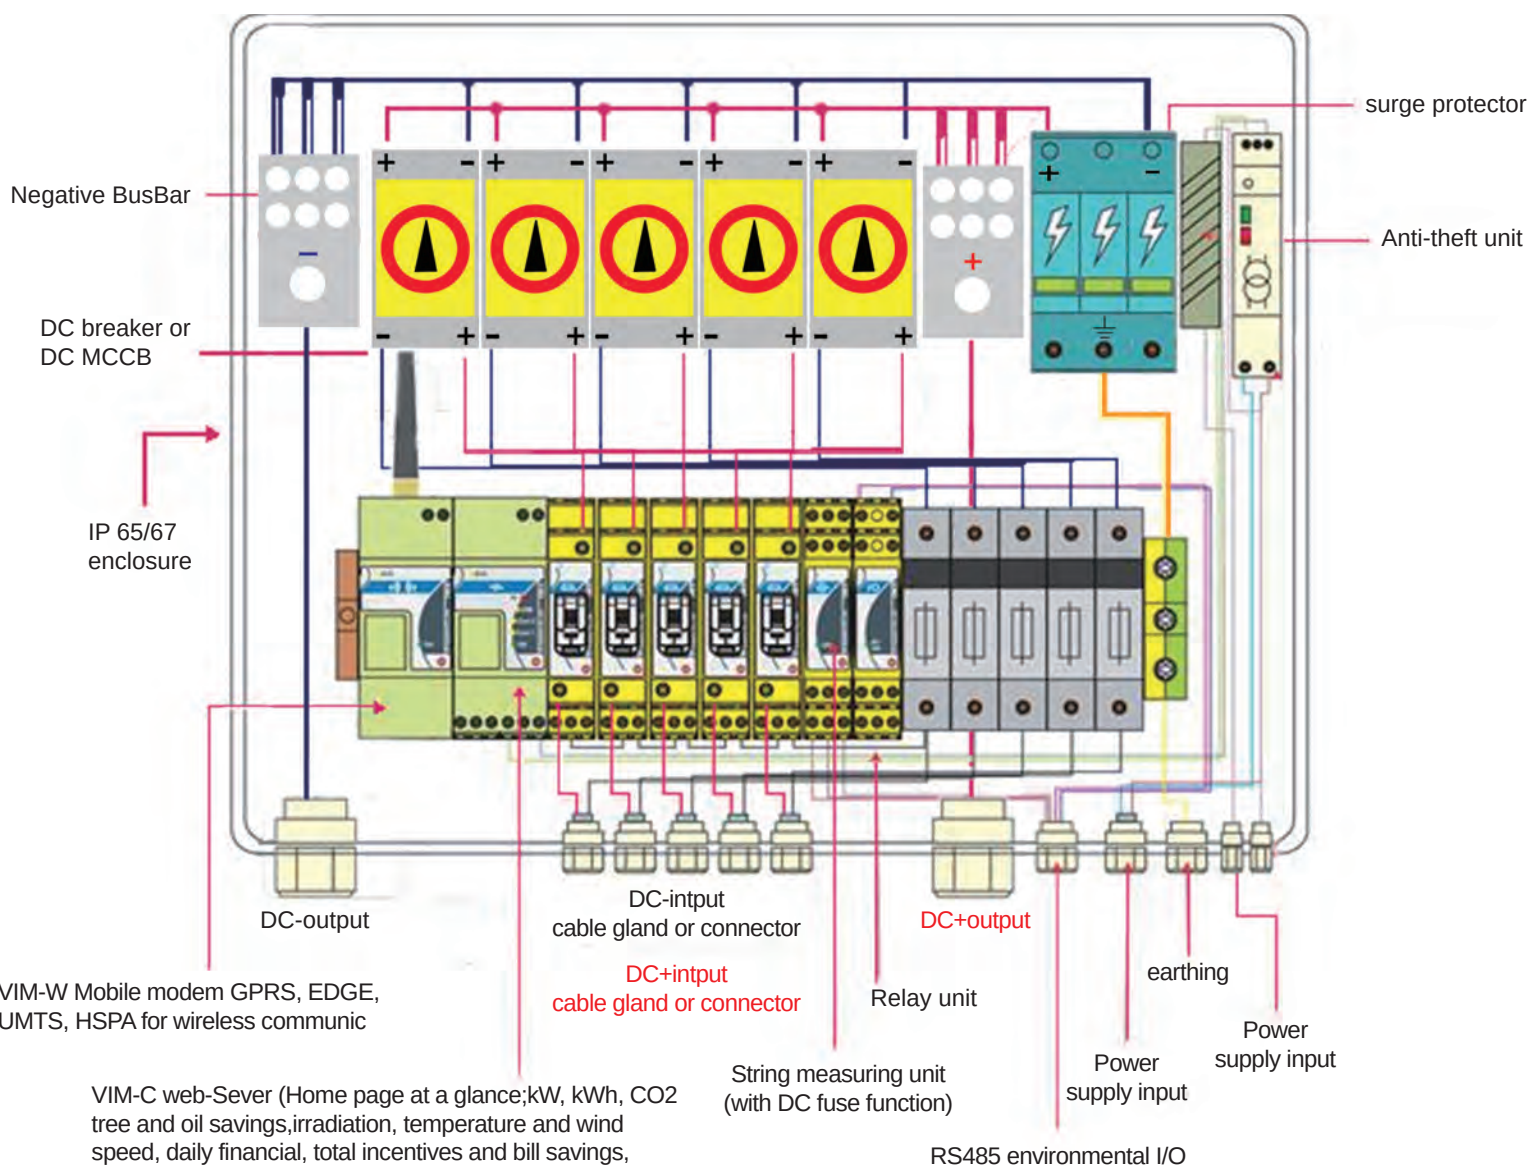

VIM-W Mobile modem GPRS, EDGE, UMTS, HSPA for wireless communic


VIM-C web-Sever (Home page at a glance; kW, kWh, CO2 tree and oil savings, irradiation, temperature and wind speed, daily financial, total incentives and bill savings, performing versus trend, payback time, string efficiency, DC power, pvBos™ & string address.)



產品優勢

- 易安裝：VIM-S 直接取代直流匯流箱正極保險絲，兼具保護及監測功能，不需更改原有箱體。
- 模組化：透過連接埠擴充模組，不需增加配線。
- 萬筆記錄：可透過 RS485 資料收集，及位址化。
- 量測每一串太陽能發電量，即時發現問題。
- 長期可節省成本、提早回收投資報酬率。

※ 電腦監控畫面，即時掌握發電狀況 ※

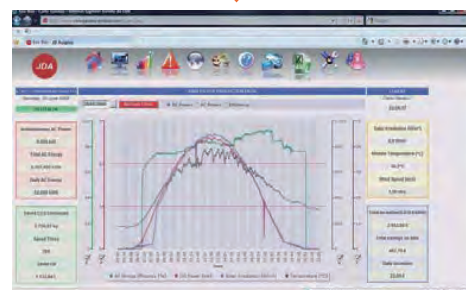



SunOrbit®

Professional

Human-Machine Interface: By providing information, alerts, commands and other tools, an HMI connects the user with the process being controlled.

Flexible

Data interface is a widely accepted protocol due to its ease of use and reliability.

Technology

Easily installation, high reliability



iMorePV®

Professional

Drive and positioning of Dual(or 2 Single) Axis Solar Trackers.

Flexible

Data interface is a widely accepted protocol due to its ease of use and reliability.

Reliable

Direct communication with the sunOrbit Solar Server via RS485 Service Interface. According to grid safety management, the product meets the requirements of the EU Medium-Voltage Directive.

Technology

Easily installation, high reliability





DC Surge protection device 直流突波吸收器 600VDC

Nominal voltage 600Vdc, In 20-40KA, I_{max} 25-50KA, IEC61643-11:2005, UL1449 ed. 3, EN505839 with aux. relay output.
PV 40/600 直流突波吸收器：600Vdc, In 10-70KA, I_{max} 25-150KA, IEC61643-11:2005, UL1449 ed.3。



DC Surge protection device 直流突波吸收器 1000VDC

Nominal voltage 1000Vdc, In 20-40KA, I_{max} 40-80KA, IEC61643-11:2005, UL1449 ed. 3, EN505839 with aux. relay output.
PV 40/1000 直流突波吸收器：1000Vdc, In 20-40KA, I_{max} 40-80KA, IEC61643-11:2005, UL1449 ed.3。



AC Surge protective devices 交流突波吸收器 D1-50/***-2MV-R

直流交流單相突波保護器：最大連續使用電壓75~800Vdc・最大放電電流40KA・突波保護等級0.3~2.0KV・無洩漏電流・DIN導軌安裝模組化設計・模塊插拔更換・熱保護脫扣設計・內建滅弧裝置・紅色落牌故障警示・常開長閉故障信控輔助接點。

Single phase power supply system, max.discharge current 40KA, MCOV from 75 to 800Vdc, Inbuilt Arc-extinguishing device, Im 40KA, Up 0.3 to 2.0KV, no leakage current, DIN rail mounting, modular design, red sign fault indication, remote aux. relay 1NO 1 NC.



AC Surge protective devices 交流突波吸收器 D3-50/***-4MV-R

直流交流單相突波保護器：複合型變阻與氣體放電管技術・最大連續使用電MCOV150~800Vac/dc・高放電能量class I/12.5KA class II/50KA・適合戶外一級雷及戶內二級雷應用・突波保護等級0.5~1.6KV/3KA・無洩漏電流・DIN導軌安裝模組化設計・模塊插拔更換・熱保護脫扣設計・內建滅弧裝置・紅色落牌故障警示・常開長閉故障信控輔助接點。


Single phase power supply system, AC and DC application 150 to 800V, max. discharge current 50KA class II, 12.5KA class I, Inbuilt Arc-extinguishing device, high energy MOV and GTD hybrid unit inside I_{max} 100KA, V_p up 0.5 to 1.6KV at 3KA, no leakage current, DIN rail mounting, modular design, red sign fault indication, remote aux. relay 1NO 1 NC.



日燭科技有限公司
JD Auspice Co., Ltd

PV50/600-MVCR

直流突波吸收器 DC Surge protection device
PVヒューズ&ホルダー

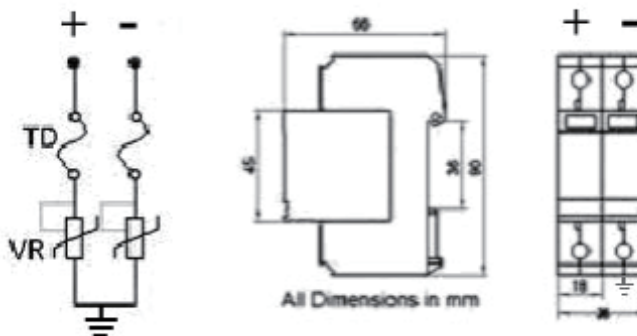

Common mode DC Surge arrester for Photovoltaic protection against surges at the boundaries from lightning protection zone 0B-1 and higher.

- Class II (C) DC arrester in according with IEC61643-11 and UL1449-3rd.
- Two part design consisting of base and plug-in protection module.
- Common protection mode.
- High energy MOV (Metal Oxide Varistor) inside.
- Reliable supervision due to disconnection device.
- Fault indication by red indication flag in window.
- Fast response.
- With remote alarm terminal optional.





Type		PV 50/600-MVCR
In accordance with		IEC61643 -11; UL1449 ed. 3
Category IEC/VDE		II / C
Protection Mode		Common mode
Nominal voltage		600VDC
Max. continuous operating voltage (DC)		670V DC
Nominal discharge current (8/20) In		20KA
Max. discharge current(8/20) Imax	Per IEC61643	40KA
	Per UL1449	50KA
Voltage protection level@In per IEC61643		2.2KV
VPR at 6KV/3KA per UL1449		<1.6KV
Response time		≤ 25 ns
Backup fuse(only required if not already provided in mains)		125A gR/gPV
Operating temperature range		- 40°C + 80 °C
Cross-section of connecton wire		Single-strand 35mm ² ; multi-strand 25mm ²
Mounting		35mm DIN -rail in accordance with EN 50022/DIN46277-3
Enclosure material		thermoplastic; extinguishing degree UL94 V0
Degree of protection		IP20
Installation width		2 modules, DIN 43880
Thermal disconnecter		Internal green- normal red- failure
Remote alarm contact		Yes
Additional data for Remote Alarm Contacts		
Remote alarm contact type		floating changeover contact
Switching capability U _N /I _N		AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A
Cross-section of connection wire		Max. 1.5mm ²



日燭科技有限公司
JD Auspice Co., Ltd

PV40/1000-MVCR

直流突波吸收器 DC Surge protection device
PVヒューズ&ホルダー

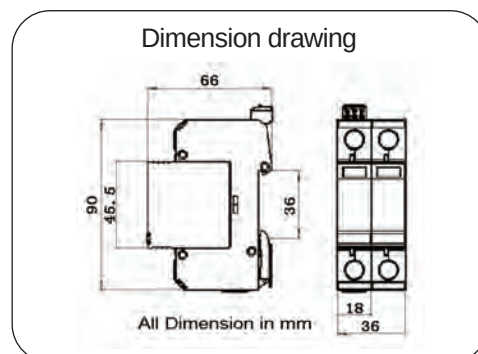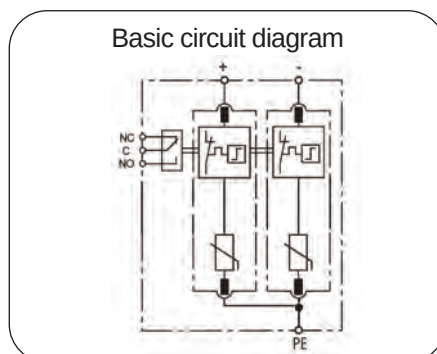


Type 2 SPD designed for low voltage system protection against surges at the boundaries from lightning protection zone 1-2 and higher.

- ◎ Class II surge protector for Photovoltaic system
- ◎ In accordance with EN50539, IEC61643-11
- ◎ Type 2, common mode surge protection, 40kA surge arrester
- ◎ Pluggable design SPD, easy replacement
- ◎ Reliable supervision due to disconnection device
- ◎ Fault indication by red indication flag in window
- ◎ With remote alarm terminal optional


Type		PV40-1000-MVCR
		1000
In accordance with		EN50539, IEC61643-11
Category IEC/VDE		II/ C
Protection Mode		Common mode
Nominal voltage (Vdc)	Un	1000
Max. continuous operating voltage (Vdc)	Ucpv	1060
Nominal discharge current(8/20)	In	20kA
Max. discharge current(8/20)	Imax	40kA
Voltage protection rating	Up	<3.6kV
	VPR	<3.0kV
Short-circuit current rating(Iscpv)		1000A
Response time		≤ 25ns
Follow current		No
Backup fuse(only required if not already provided in mains)		125A gR/gPV
Operating temperature range		- 40°C ~ + 80°C
Cross-section of connection wire		Single-strand 35mm ² ; multi-strand 25mm ²
Mounting		35mm DIN-rail in accordance with EN 50022/DIN46277-3
Enclosure material		thermoplastic; extinguishing degree UL94 V-0
Degree of protection		IP20
Installation width		2 modules, DIN 43880
Thermal disconnector		Internal green – normal ; red - failure
Remote alarm contact		Optional
Approvals, Certifications		CE
Remote alarm contact type		Isolated Form C
Switching capability Un/In		AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A
Max. Size of connecting wire		Max. 1.5mm ² (or # 16AWG)



Basic circuit diagram




Dimension drawing



Common mode & Differential mode DC Surge arrester for PV/DC system protection against surges at the boundaries from lightning protection zone 1-2 and higher.

- In accordance with IEC61643-11 compliance;
- Common Mode and Differential protection;
- Remote signaling contact;
- Pluggable mounting;
- Very low Up protection level


Type	PV50/1000-MVCDR		
	1000		
In accordance with	IEC61643-11:2011; UL1449 3rd		
Category IEC/VDE	II/ C		
Protection Mode	Common mode & Differential mode		
Nominal voltage (Vdc)	Un	1000	
Max. continuous operating voltage (Vdc)	Uc	1120	
Nominal discharge current(8/20)	In	20kA	
Max. discharge current(8/20)	Imax	Per IEC61643 (1 pulse)	40kA
		Per UL1449 (1 pulse)	50kA
Voltage protection rating	Up	Per IEC61643	<3.6kV
	VPR	Per UL1449	<2.8kV
Response time	≤25 ns		
Follow current	No		
Backup fuse(only required if not already provided in mains)	125A gR/gPV		
Operating temperature range	- 40°C ~ + 80°C		
Cross-section of connection wire	Single-strand 35mm ² ; multi-strand 25mm ²		
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3		
Enclosure material	thermoplastic; extinguishing degree UL94 V-0		
Degree of protection	IP20		
Installation width	3 modules, DIN 43880		
Thermal disconnecter	Internal green – normal ; red - failure		
Remote alarm contact	Yes		
Approvals, Certifications	CE/ETL		
Remote alarm contact type	Isolated Form C		
Switching capability Un/In	AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A		
Max. Size of connecting wire	Max. 1.5mm ² (or # 16AWG)		

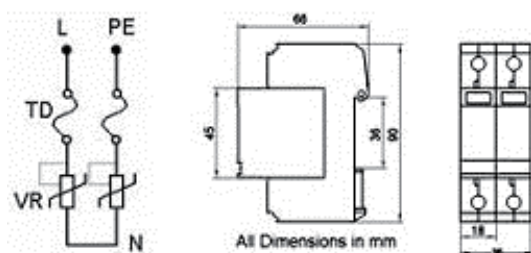


Surge arrester for low-voltage power supply system protection against surges at the boundaries from lightning protection zone 0B-1 and higher.

- ◎ Class II (C) arrester in according with IEC61643-11.
- ◎ Two part design consisting of base and plug-in module.
- ◎ High energy MOV (Metal Oxide Varistor) inside.
- ◎ Reliable supervision due to disconnection device.
- ◎ Fault indication by red indication flag in window.
- ◎ Fast response.
- ◎ With remote alarm terminal.


Type		D1-50/275-2MV-R
		275
In accordance with		IEC61643 -11, UL1449 3rd
Category IEC/VDE		Class II/C
Max. continuous operating voltage (AC/DC)		275/300
Nominal discharge current(8/20) In	L-N	20KA
	N-PE	20KA
Max. discharge current(8/20) I _{max}	L-N	50KA
	N-PE	50KA
Voltage protection level@In		1.3kV
Voltage protection rating @6KV/3KA		1.0KV
Response time		≤25 ns
Backup fuse(only required if not already provided in mains)		125A gL/gG
Operating temperature range		- 40°C ~ + 80°C
Cross-section of connection wire		Single-strand 35mm ² ; multi-strand 25mm ²
Mounting		35mm DIN-rail in accordance with EN 50022/DIN46277-3
Enclosure material		thermoplastic; extinguishing degree UL94 V0
Degree of protection		IP20
Installation width		2 modules, DIN 43880
Thermal disconnecter		Internal green- normal red- failure
Remote alarm contact		Yes
Additional data for Remote Alarm Contacts		
Remote alarm contact type		floating changeover contact
Switching capability UN/IN		AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A
Cross-section of connection wire		Max. 1.5mm ²

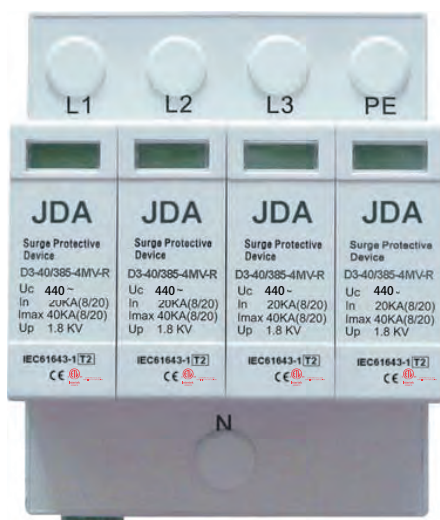

Basic circuit diagram



Dimension drawing



Surge arrester for low-voltage power supply system protection against surges at the boundaries from lightning protection zone 1-2 and higher.

- ◎ Class II (C) arrester in according with IEC61643-11, UL1449 3rd.
- ◎ Two part design consisting of base and plug-in protection module, very easy for maintenance.
- ◎ Reliable supervision due to disconnection device.
- ◎ Fault indication by red indication flag in window.
- ◎ Fast response.
- ◎ With remote alarm terminal optional.

Type		D3-40/440-4MV-R	
		440	
In accordance with		IEC61643-11:2011; UL1449 3 rd	
Category IEC/VDE		II/ C	
Max. continuous operating voltage (AC/DC)		440/5585	
Nominal discharge current(8/20) I _n		20kA	
Max. discharge current(8/20) I _{max}		40kA	
Voltage protection level	@I _n	<2.0kV	
	@VPR	<1.5kV	
Response time		≤25 ns	
Follow current		No	
Backup fuse(only required if not already provided in mains)		125A gL/gG	
Operating temperature range		- 40°C ~ + 80°C	
Cross-section of connection wire		Single-strand 35mm ² ; multi-strand 25mm ²	
Mounting		35mm DIN-rail in accordance with EN 50022/DIN46277-3	
Enclosure material		thermoplastic; extinguishing degree UL94 V-0	
Degree of protection		IP20	
Installation width		4 modules, DIN 43880	
Thermal disconnecter		Internal green – normal ; red - failure	
Remote alarm contact		Yes	
Approvals, Certifications		CE	
Additional data for Remote Alarm Contacts			
Remote alarm contact type		Isolated Form C	
Switching capability Un/I _n		AC: 250V/0.5A	DC: 250V/0.1A; 125V/0.2A; 75V/0.5A
Max. Size of connecting wire		Max. 1.5mm ² (or # 16AWG)	



Data Network Protector for high-frequency signal transmission 訊號突波保護器DN-24/XXXX-2G

插拔模塊 · DIN rail安裝 · 8/20us電流波In.5KA · 箝制電壓(保護水平) 25V,-95V, · 溫域-40~+80°C · 阻燃UL94-V0 · 另有指示燈規格可選。

Signal transmission, surge protective devices with plug-in protection modules for high-frequency signal transmission systems against surges at the boundaries from lightning protection zone 0B>2, Signal transmission is not interrupted when exchanging modules, max. discharge current 10KA, 35 mm DIN-rail mounting design.



Data Network Protector for high-frequency signal transmission 訊號突波保護器DN-24/xxxxx-2G

插拔模塊 · DIN rail安裝 · 8/20us電流波In.10KA · 箝制電壓(保護水平) 25V,-95V, · 溫域-40~+80°C · 阻燃UL94-V0。

Signal transmission, surge protective devices with plug-in protection modules for high-frequency signal transmission systems against surges at the boundaries from lightning protection zone 0B>2, max. discharge current 20KA, 35 mm DIN-rail mounting design.



Data Network Protector for analogue telecommunication 訊號突波保護器DN-xxxAT

指示燈 · 插拔模塊 · DIN rail安裝 · 組合波8/20us · In.5KA · 組合波10/350US 10KA · 箝制電壓(保護水平) Line-Line ≤700V-1000V · 溫域-40~+80°C · 阻燃UL94-V0。

Data network protector in according with IEC61643-11 : 21,Two parts design, surge protection modules to be exchanged easily, Signal transmission is not interrupted when exchanging modules, Limit the transients with gas discharge tubes and varistors, Two-stage protection circuit, For universal analogue tele -communication protection, 35 mm DIN-rail mounting design.

Model No.	DN-05/RS485-2G-B	DN-24/0420-2G
Appliance	xxxxx:RS232,RS422,RS423,RS485,0/4-20mA,0-5V,0-10V	
Configuration	twisted pair + shield	
Nominal line voltage (Un)	5V	
Max line voltage	8V	
Max line current	300mA	
Nominal Discharge Current (8/20μs,KA) In 10 times	10kA	
Total Max. Discharge Current (8/20μs,KA) I _{max} 1 time	20kA	
Impulse current (I _{imp}) (10/350us KA) impulse 2 times	5kA	
Nominal Current (A) I _L	0.5A	
Protection level(U _p) 8/20us impulse-5KA	35V	
Series impedance per line (Ohm)	2.2 Ohm	
Insertion loss at 10MHz (dB)	≤3.0	
Degree of protection	IP20	
Mounting on	35 mm DIN-rail	
Enclosure Material	UL94 V0	
Environment Temperature (°C)	- 40~+80	
Cat.B(@3KA)		≤ 75V



PV string combiner box stringMoni® 智慧型直流匯流箱

IP65/67 · 500, 800, 1000Vdc · 1, 2, 3, 4, 6, 8, 12, 16, 24串列組合 · VDE 0100 and IEC 60364-7-712, IEC 62109-4 · stringMoni IP 65/67, 500-1000Vdc, 1, 1, 2, 3, 4, 6, 8, 12, 16, 24 strings, Monitoring and protect each string, solve problems immediately. All the most significant data are transmitted via RS 485.



PV string combiner box with surgeCon 串列匯流箱附雷擊計數器

二串輸出 · 配置IP67防水箱 · 4P 1000Vdc直流開關1個或2P二個 · 直流保險絲及座4個(正負極各2個) · 突波保護器1個 · 適用二只追蹤器之逆變器 · 1個雷擊計數器 · 4~6KW用或依開關電流額定適用10~25KW ·

Two strings combiner box with surge counter SurgeCon for 2MPPT tracker. Configure with IP67 enclosure, 4 pole 1000Vdc DC disconnectors or 2pcs 2 pole 1000Vdc DC disconnect, PV fuse 4pcs, DC surge protector 2 pcs, SurgeCon 1pc, for 4~6KW PV system or for 10~25KW in according with rated current of DC disconnect switch, IEC 62109-4.



PV string combiner box with surgeCon 串列匯流箱附雷擊計數器

三串輸出 · 配置IP67防水箱 · 6P 1000Vdc直流開關 1 個或2P三個, 直流保險絲及座 6個(正負極各3個), 突波保護器 3個 · 適用三只追蹤器之逆變器 · 1個雷擊計數器 · 6~10KW用或依開關電流額定適用10~25KW ·

Three strings combiner box for 3MPPT tracker. Configured with IP67 enclosure, 6 pole 1000Vdc DC disconnect or 3pcs 2poles 1000Vdc DC disconnect, PV fuse 6pcs, DC surge protector 3 pcs, SurgeCon 1pc, for 6~10KW PV system or for 10~25KW in according with rated current of DC disconnect switch.



AC Box AC交流開關箱

交流開關箱：多數歐盟國家規定必須裝置交流斷路器、漏電斷路器、突波(過壓)保護器 · 箱體配置歐式端子並予結線 · 現場安裝節省成本與時間 · 除了歐規還有美規以及接受客製 · AC Combiner box with MCCB, AC surge protector.



Energy meter 單相瓦時表 WHM10-DIN

單相瓦時表 · DIN導軌安裝 · IP40保護 · 免電源 · 32A · 5位數LCD · 一個脈衝輸出 · One-phase energy meter with LCD data displaying, indicated for active energy metering. Housing for DIN-rail mounting, IP40 (front) protection degree. Direct connection up to 32A.

產品規格Product Characteristics

防水防塵等級 Ingress Protection Water, dust-proof grade IP66/67, Degree of strength IK07/08

材質Material quality : A:ABS , C:PC , P:PC/ABS

耐溫Critical temperature : ABS : -40°C ~+85°C ; PC: -40°C~+120°C

耐熱Burn poorly : PC/ABS : 0-5VA ; ABS : 94-V-0

型號Products Type : P series / H series / S,M series / D series

P series : Hinge type



H series : stainless hinge type



S/M series : screw type



D series : All-in-one-Dual door



Accessories



Steel back panel
(zinc plating)



plastic mounting
plates (ABS)



Lock catch
(K40)



Locker
(SK)



plastic locker
(PK)



JDA-PSK



JDA-PSK



Vent
(V60, V80)



Plastic bracket
(PB20, 25)



Growatt 1-3K-S 組串型逆變器

Double MPPT Tracker, MPPT tracking accuracy more than 99.5%Max. Efficiency 97.9%, European Efficiency 97.4%Integrated DC switch for added safety protection
最高效率97.9%，寬電壓輸入範圍，內置直流開關，GT拓撲結構設計，無變壓器，無風扇設計，多路MPPT技術，多路並聯組串，IP65設計，聲控LCD，安裝簡單。



Growatt 2.5-5K MTL-S 組串型逆變器

Double MPPT Tracker, MPPT tracking accuracy more than 99.5%Max. Efficiency 97.9%, European Efficiency 97.4%Integrated DC switch for added safety protection
最高效率97.9%，寬電壓輸入範圍，內置直流開關，GT拓撲結構設計，無變壓器，無風扇設計，多路MPPT技術，多路並聯組串，IP65設計，聲控LCD，安裝簡單。



Growatt 10-20K UE 組串型逆變器

DC input voltage up to 1000V Maximum efficiency of 98% Internal DC switch Transformerless Compact design Multi MPP controller MTL-string Bluetooth/ RF technology/ Zigbee/ Wi-Fi Sound control and Easy installation
高達1000V的直流輸入電壓，最高效率98%，寬電壓輸入範圍，內置直流開關，GT拓撲結構設計，無變壓器設計，多路MPP技術，多路並聯組串，IP65設計，聲控LCD，安裝簡單直流防雷模塊選件，交流開關選件。



Growatt 30-40K TL3-S 組串型逆變器

Maximum efficiency of 99%, Compact design, Sound control Multi MPP controller Maximum efficiency of 99% Compact design Sound control Multi MPP controller MTL string, Interanl DC switch and Optional AC switch.
該系列產品擁有99%的轉換效率和業界最高的防雷等級
完善的保護功能，廣泛適用於分佈式光伏電站/大型地面電站/漁光互補/農光互補等電站類型。



Growatt 30-40K TL3 組串型逆變器

Maximum efficiency of 99% Compact design Sound control Multi MPP controller Maximum efficiency of 99% Compact design Sound control Multi MPP controller MTL stringInteranl, DC switch Optional AC switch.
該系列產品擁有99%的轉換效率和業界最高的防雷等級，聲控LCD，多路併聯組串，多個追蹤器控制裝置完善的保護功能，廣泛適用於分佈式光伏電站/大型地面電站/漁光互補/農光互補等電站類型。



		Growatt 1000-S	Growatt 1500-S	Growatt 2000-S	Growatt 3000-S
輸入數據(直流) Input Data					
最大直流輸入功率	Max. recommended PV power (for module STC)	1300W	1900W	2300W	3400W
最大直流輸入電壓	Max. DC voltage	450V	450V	450V	550V
啟動電壓	Start voltage	80V	80V	80V	80V
直流輸入電壓範圍	PV voltage range	70V-450V	70V-450V	70V-450V	70V-550V
MPPT 工作電壓範圍/ 額定輸入電壓	MPP work voltage range/ nominal voltage	70V-450V/180V	70V-450V/250V	70V-450V/250V	70V-550V/360V
滿載DC工作電壓範圍	Full load dc voltage range	110V-400V	175V-400V	200V-400V	250V-440V
最大直流輸入電流	Max. input current	10A	10A	11A	13A
各組串最大直流輸入電流	Max. input current per string	10A	10A	11A	13A
MPP 追蹤器數量/各追蹤器 最大併聯組串數	Number of independent MPP trackers /strings per MPP tracker	1/1	1/1	1/1	1/1
輸出數據(交流) Output (AC)					
額定交流輸出功率	Rated AC output power	1000W	1600W	2000W	3000W
最大交流輸出功率	Max. AC power	1000W	1650W	2000W	3000W
最大交流輸出電流	Max. output current	4.7A	7.8A	9.5A	14.3A
額定輸出電壓；範圍	AC nominal voltage; range	220,230,240V 180Vac-280Vac	220,230,240V 180Vac-280Vac	220,230,240V 180Vac-280Vac	220,230,240V 180Vac-280Vac
電網頻率；範圍	AC grid frequency; range	50,60 Hz;±5 Hz	50,60 Hz;±5 Hz	50,60 Hz;±5 Hz	50,60 Hz;±5 Hz
功率因數	Power factor	1	1	1	1
THDI	THDI	<3%	<3%	<3%	<3%
交流連接類型	AC connection	Single phase	Single phase	Single phase	Single phase
效率 Efficiency					
最大效率	Max. efficiency	97%	97%	97%	97%
歐洲加權效率	Euro weighted efficiency	95.5%	96.5%	96.5%	96.5%
MPPT效率	MPPT efficiency	99.5%	99.5%	99.5%	99.5%
設備保護 Protection Devices					
直流極性反接保護	DC reverse polarity protection	yes	yes	yes	yes
直流輸入開關	DC switch rating for each MPPT	yes	yes	yes	yes
交流輸出過壓保護	Output over current protection	yes	yes	yes	yes
交流輸出過壓保護-壓敏電阻	Output over voltage protection varistor	yes	yes	yes	yes
接地故障監測	Ground fault monitoring	yes	yes	yes	yes
電網監測	Grid monitoring	yes	yes	yes	yes
內建全極性感應電流監測	Integrated all - pole sensitive leakage current monitoring unit	yes	yes	yes	yes
常規數據 General Data					
尺寸 (寬/高/深)	Dimensions (W / H / D) in mm	271*267*127	271*267*127	271*267*127	320*261*142
重量	Weight	5.5KG	5.5KG	5.5KG	6.6KG
運行溫度範圍	Operating temperature range	- 25°C ... +60°C with derating above 45°C	- 25°C ... +60°C with derating above 45°C	- 25°C ... +60°C with derating above 45°C	- 25°C ... +60°C with derating above 45°C
噪音指數 (通常)	Noise emission (typical)	≤ 25 dB(A)	≤ 25 dB(A)	≤ 25 dB(A)	≤ 25 dB(A)
海拔高度	Altitude	2000m(6560ft) without derating	2000m(6560ft) without derating	2000m(6560ft) without derating	2000m(6560ft) without derating
夜間自耗電	Self-Consumption night	<0.5 W	<0.5 W	<0.5 W	<0.5 W
拓撲結構	Topology	Transformerless	Transformerless	Transformerless	Transformerless
冷卻方式	Cooling concept	Natural	Natural	Natural	Natural
防護等級	Environmental Protection Rating	IP65	IP65	IP65	IP65
相對濕度	Relative humidity	100%	100%	100%	100%
特點 Features					
直流鏈接方式	DC connection	H4	H4	H4	H4
交流鏈接方式	AC connection	Connector	Connector	Connector	Connector
顯示	Display	LCD	LCD	LCD	LCD
通訊接口	Interfaces: RS232/ RF/ Wi-Fi/ Ethernet	yes /opt/opt/opt	yes /opt/opt/opt	yes /opt/opt/opt	yes /opt/opt/opt
質保期：5年/10年	Warranty: 5 years / 10 years	yes /opt	yes /opt	yes /opt	yes /opt

認證許可 Certificates and Approvals

CE, VDE 0126-1-1, IEC 62109, G83, AS4777, AS/NZS 3100, CEI0-21, VDE-AR-N4105, EN0438, CQC

2500MTL-S/3000MTL-S/3600MTL-S/4200MTL-S/5000MTL-S/5500MTL-S



日煬科技有限公司
JD Auspice Co., Ltd

太陽能變流器系列 PV inverter
PVパワーコンディショナー

輸入數據(直流) Input Data		Growatt 2500MTL-S	Growatt 3000MTL-S	Growatt 3600MTL-S	Growatt 4200MTL-S	Growatt 5000MTL-S	Growatt 5500MTL-S
最大直流輸入功率	Max. recommended PV power (for module STC)	2900W	3500W	4100W	4800W	5300W	5750W
最大直流輸入電壓	Max. DC voltage	500V	500V	550V	550V	550V	550V
啟動電壓	Start voltage	100V	100V	100V	100V	100V	100V
直流輸入電壓範圍	PV voltage range	70V-550V	70V-550V	70V-550V	70V-550V	70V-550V	70V-550V
追蹤器工作範圍 / 正常電壓	MPP work voltage range / nominal voltage	80V-550V/360V	80V-550V/360V	80V-550V/360V	80V-550V/360V	80V-550V/360V	80V-550V/360V
滿載DC電壓範圍	Full load dc voltage range	130V-450V	160V-450V	190V-500V	150V-500V	160V-500V	175V-500V
追蹤器最大輸入電流A/B	Max. input current of tracker A / tracker B	10A/10A	10A/10A	10A/10A	15A/15A	15A/15A	15A/15A
最大串電流A/B	Max. input current per string of tracker A/tracker B	10A/10A	10A/10A	10A/10A	15A/15A	15A/15A	15A/15A
追蹤器數 / 每追蹤器併數	Number of independent MPP trackers / strings per MPP tracker	2/1	2/1	2/1	2/1	2/1	2/1
最大直流比, 依電壓電流	Max.DC ratio, depending on V,A	1.1~1.2	1.1~1.5	1.1~1.3	1.1~1.3	1.1~1.3	1.1~1.2
輸出數據(交流) Output (AC)							
額定交流輸出功率	Rated AC output power	2500W	3000W	3600W	4200W	4600W	5000W
最大交流視在功率	Max. AC apparent power	2500VA	3000VA	3600VA	4200VA	4600VA	5000VA
最大交流輸出電流	Max. output current	11.3A	13.6A	16.3A	19A	20.9A	22.7A
正常交流輸出電壓/範圍	AC nominal voltage/range	220V/230V/240V; 180Vac - 280Vac	220V/230V/240V; 180Vac - 280Vac	220V/230V/240V; 180Vac - 280Vac	220V/230V/240V; 180Vac - 280Vac	220V/230V/240V; 180Vac - 280Vac	220V/230V/240V; 180Vac - 280Vac
電網頻率/範圍	AC grid frequency/range	50Hz,60Hz /±5 Hz	50Hz,60Hz /± 5Hz	50Hz,60Hz /± 5Hz	50Hz,60Hz /± 5Hz	50Hz,60Hz /± 5Hz	50Hz,60Hz /± 5Hz
額定功率因數	Power factor at rated power	1	1	1	1	1	1
可配置位移功率因數	Displacement power factor, configurable	0.8leading... 0.95lagging	0.8leading... 0.95lagging	0.8leading... 0.95lagging	0.8leading... 0.95lagging	0.8leading... 0.95lagging	0.8leading... 0.95lagging
諧波	THDI	<3%	<3%	<3%	<3%	<3%	<3%
交流連接類型	AC connection	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
效率 Efficiency							
最大效率	Max. efficiency	97.6%	97.6%	97.9%	97.9%	97.9%	97.9%
歐洲加權效率	Euo weighted efficiency	97%	97%	97.4%	97.4%	97.4%	97.4%
追蹤器效率	MPPT efficiency	99.5%	99.5%	99.5%	99.5%	99.5%	99.5%
設備保護 Protection Devices							
直流極性反接保護	DC reverse polarity protection	yes	yes	yes	yes	yes	yes
直流輸入開關	DC switch rating for each MPPT	yes	yes	yes	yes	yes	yes
輸出過流保護	Output over current protection	yes	yes	yes	yes	yes	yes
輸出過壓保護	Output over voltage protection-varistor	yes	yes	yes	yes	yes	yes
接地故障檢測	Ground fault monitoring	yes	yes	yes	yes	yes	yes
電網監測	Grid monitoring	yes	yes	yes	yes	yes	yes
內建全極性感應漏電流檢測裝置	Integrated all - pole sensitive leakage current monitoring unit	yes	yes	yes	yes	yes	yes
常規數據 General Data							
尺寸(寬/高/深)	Dimensions (W / H / D) in mm	355*419*138	355*419*138	355*419*138	355*419*138	355*374*158	355*374*158
重量	Weight	14KG	14KG	14KG	14KG	14.5KG	14.5KG
運行溫度範圍	Operating temperature range	- 25°C ... +60°C	- 25°C ... +60°C	- 25°C ... +60°C	- 25°C ... +60°C	- 25°C ... +60°C	- 25°C ... +60°C
噪聲指數(典型)	Noise emission (typical)	≤ 25 dB(A)	≤ 25 dB(A)	≤ 25 dB(A)	≤ 25 dB(A)	≤ 25 dB(A)	≤ 25 dB(A)
海拔高度	Altitude	2000m without derating	2000m without derating	2000m without derating	2000m without derating	2000m without derating	2000m without derating
夜間自耗電	Self-Consumption night	< 0.5 W	< 0.5 W	< 0.5 W	< 0.5 W	< 0.5 W	< 0.5 W
拓撲結構	Topology	Transformerless	Transformerless	Transformerless	Transformerless	Transformerless	Transformerless
冷卻方式	Cooling concept	Natural	Natural	Natural	Natural	Natural	Natural
防護等級	Environmental Protection Rating	IP 65	IP 65	IP 65	IP 65	IP 65	IP 65
相對濕度	Relative humidity	100%	100%	100%	100%	100%	100%
特點 Features							
直流連接方式	DC connection	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)
交流連接方式	AC connection	Connector	Connector	Connector	Connector	Connector	Connector
顯示	Display	LCD	LCD	LCD	LCD	LCD	LCD
通訊接口	Interfaces: RS232/RF/Wi-Fi/Ethernet	yes / opt / opt / opt	yes / opt / opt / opt	yes / opt / opt / opt	yes / opt / opt / opt	yes / opt / opt / opt	yes / opt / opt / opt
質保期: 5年/10年	Warranty: 5 years / 10 years	yes / opt	yes / opt	yes / opt	yes / opt	yes / opt	yes / opt

認證許可 Certificates and Approvals

CE, IEC62109, G83, VDE0126-1-1, G59, AS4777, AS/NZS 3100, CEI0-21, VDE-AR-N4105, EN50438, CQC

Note: Subject to change without any notice.



日燭科技有限公司
JD Auspice Co., Ltd

10000UE/12000UE/18000UE/20000UE

太陽能變流器系列 PV inverter
PVパワーコンディショナー

輸入數據(直流) Input Data

		Growatt 10000UE	Growatt 12000UE	Growatt 18000UE	Growatt 20000UE
最大直流輸入功率	Max recommended PV power	11000W	13200W	19800W	22000W
最大直流輸入電壓	Max DC voltage	1000V	1000V	1000V	1000V
啟動電壓	Start Voltage	350V	350V	350V	350V
直流輸入電壓範圍	PV voltage range	180V - 1000V	180V - 1000V	180V - 1000V	180V - 1000V
追蹤器工作範圍 / 正常電壓	MPP voltage range / nominal voltage	300V - 1000V / 600V	300V - 1000V / 600V	300V - 1000V / 600V	300V - 1000V / 600V
滿載DC電壓範圍	Full load DC voltage range	400V - 800V	400V - 800V	400V - 800V	400V - 800V
追蹤器數量 / 每追蹤器併數	Number of MPP trackers / strings per MPP tracker	2/2	2/2	2/3	2/3
最大輸入電流	Max. input current	15A / 15A	17A / 17A	23A / 23A	26A / 26A
每串最大輸入電流	Max. input current per string	20A	20A	20A	20A
最大直流比, 依電壓電流	Max.DC ratio, depending on V,A	1.05~1.3	1.05~1.3	1.05~1.3	1.05~1.3

輸出數據(交流) Output (AC)

額定交流輸出功率	Rated AC output power	10KW	12KW	18KW	20KW
最大交流視在功率	Max. AC apparent power	10KVA	12KVA	18KVA	20KVA
最大交流輸出電流	Max. output current	16A	19A	28.6A	32A
額定交流輸出電壓 / 範圍	AC nominal voltage / range	230V/400V 184 - 275V	230V/400V 184 - 275V	230V/400V 184 - 275V	230V/400V 184 - 275V
電網頻率 / 範圍	AC grid frequency / range	50-60Hz; 44-55Hz/54-65Hz	50-60Hz; 44-55Hz/54-65Hz	50-60Hz; 44-55Hz/54-65Hz	50-60Hz; 44-55Hz/54-65Hz
額定功率因數	Power factor at rated power	1	1	1	1
可配置位移功率因數	Displacement power factor configurable	0~0.8leading - 0~0.8lagging	0~0.8leading - 0~0.8lagging	0~1leading -0~1lagging	0~1leading - 0~1lagging
諧波	THDI	<3%	<3%	<3%	<3%
交流連接類型	AC connection	3/N/PE, 3W+PE(Opt)	3/N/PE, 3W+PE(Opt)	3/N/PE, 3W+PE(Opt)	3/N/PE 3W+PE(Opt)

效率 Efficiency

最大效率	Max. efficiency	98%	98%	98%	98%
歐洲加權效率	Euro - eta	97.5%	97.5%	97.5%	97.5%
MPPT效率	MPPT efficiency	99.5%	99.5%	99.5%	99.5%

設備保護 Protection Devices

直流極性反接保護	DC reverse polarity protection	yes	yes	yes	yes
直流輸入開關	DC switch for each MPPT	yes	yes	yes	yes
交流輸出過流保護	Output AC overcurrent protection	yes	yes	yes	yes
交流輸出過壓保護 - 壓敏電阻	Output AC overvoltage protection - varistor	yes	yes	yes	yes
接地故障檢測	Ground fault monitoring	yes	yes	yes	yes
電網監測	Grid monitoring	yes	yes	yes	yes
內建全極性感應漏電流檢測裝置	Integrated all-pole sensitive leakage current monitoring unit	yes	yes	yes	yes

常規數據 General Data

尺寸(寬/高/深)	Dimensions (W / H / D)	490/740/235 mm	490/740/235 mm	570/740/235 mm	570/740/235 mm
重量	Weight	41kg	41kg	60kg	60kg
運行溫度範圍	Operating temperature range	-25 °C ... +60 °C (with derating above 45°C)	-25 °C ... +60 °C (with derating above 45°C)	-25 °C ... +60 °C (with derating above 45°C)	-25 °C ... +60 °C (with derating above 45°C)
噪聲指數(典型)	Noise emission (typical)	≤ 55 dB(A)	≤ 55 dB(A)	≤ 55 dB(A)	≤ 55 dB(A)
夜間自耗電	Self-Consumption (night)	<0.5W	<0.5W	<0.5W	<0.5W
待機耗電	Standby consumption	12W	12W	12W	12W
拓撲結構	Topology	Transformerless 無變壓器	Transformerless 無變壓器	Transformerless 無變壓器	Transformerless 無變壓器
冷卻方式	Cooling concept	Smart cooling 智能冷卻	Smart cooling 智能冷卻	Smart cooling 智能冷卻	Smart cooling 智能冷卻
防護等級	Environmental Protection Rating	IP 65	IP 65	IP 65	IP 65
海拔高度	Altitude	2000m without derating	2000m without derating	2000m without derating	2000m without derating
相對濕度	Relative Humidity	0~100% 無冷凝	0~100%	0~100% 無冷凝	0~100% 無冷凝

特點 Features

直流連接方式	DC connection	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)	H4/MC4(opt)
交流連接方式	AC connection	Screw terminal	Screw terminal	Screw terminal	Screw terminal
顯示	Display	LCD	LCD	LCD	LCD
通訊接口	Interfaces: RS232/R485/Ethernet/RF/WiFi	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt
質保期: 5年/10年	Warranty: 5 years / 10 years	yes / opt	yes / opt	yes / opt	yes / opt

認證許可

Certificates and Approvals

VDE-AR-N4105, CEI 0-21, CEI 0-16, CE, VDE 0126-1-1, IEC 62109, RD 1663, G59, C-tick, AS4777, AS/NZS 3100, IEC61727, IEC62116, BDEW(For 18-20k), IEC 61683, NRS 097-2-1, PEA, MEA, G59, EN50438



輸入數據(直流) Input Data

最大直流輸入功率	Max recommended PV Power (for module STC)
最大直流輸入電壓	Max DC voltage
啟動電壓	Start Voltage
直流輸入電壓範圍	PV voltage range
正常電壓	Nominal voltage
滿載MPP電壓範圍	Full load MPP voltage range
最大輸入電流	Max. input current
每串最大輸入電流	Max. input current per string
追蹤器數量/ 每追蹤器併數	Number of MPP trackers/ strings per MPP tracker
最大直流比, 依電壓電流	Max.DC ratio, depending on V,A

Growatt 30000TL3-S

37500W
1000V
250V
200V - 1000V
580V
450V - 800V
34A/34A
12A
2/4
1.1~1.3

Growatt 33000TL3-S

41250W
1000V
250V
200V - 1000V
580V
450V - 800V
38A / 38A
12A
2/4
1.1~1.3

Growatt 40000TL3-S

50000W
1000V
250V
200V - 1000V
695V
550V - 800V
38A / 38A
12A
2/4
1.1~1.25

輸出數據(交流) Output (AC)

額定交流輸出功率	Rated AC output power
最大交流視在功率	Max. AC apparent power
最大交流輸出電流	Max. output current
額定交流輸出電壓	AC nominal voltage
電網頻率	AC grid frequency
可配置位移功率因數	Power factor
諧波	THDi
交流電網連接類型	AC grid connection type

30KW
30KVA
44A
230V/400V
50/60Hz
0.8 leading - 0.8 lagging
<3%
3W+N+PE

33KW
33KVA
48A
230V/400V
50/60Hz
0.8 leading - 0.8 lagging
<3%
3W+N+PE

40KW
40KVA
48A
277V/480V
50/60Hz
0.8 leading - 0.8 lagging
<3%
3W+PE

效率 Efficiency

最大效率	Max. efficiency
歐洲加權效率	Euro - eta
追蹤器效率	MPPT efficiency

98.9%
98.4%
99.5%

98.9%
98.4%
99.5%

99%
98.5%
99.5%

設備保護 Protection Devices

直流極性反接保護	DC reverse polarity protection
直流輸入開關	DC Switch for each MPPT
交流開關	AC Switch
直流突波保護	DC Surge protection
接地故障檢測	Ground fault monitoring
短路輸出保護	Output short circuit protection
交流突波保護	AC Surge protection
保險絲串保護	String Fuse protection
串列故障監測	String fault monitoring
抗PID保護	Anti-PID protection
AFCI保護	AFCI protection

yes
yes
opt
Class II
yes
yes
Class II
yes
yes
yes
yes
opt

yes
yes
opt
Class II
yes
yes
Class II
yes
yes
yes
yes
opt

yes
yes
opt
Class II
yes
yes
Class II
yes
yes
yes
yes
opt

常規數據 General Data

尺寸(寬/高/深)	Dimensions (W / H / D)
重量	Weight
運行溫度範圍	Operating temperature range
噪聲指數(典型)	Noise emission (typical)
夜間自耗電	Self-Consumption (night)
拓撲結構	Topology
冷卻方式	Cooling concept
防護等級	Environmental Protection Rating
海拔高度	Altitude
相對濕度	Relative Humidity

470/754/270 mm
48kg
-25 °C ... +60 °C (with derating above 45°C)
≤ 40 dB(A)
<1W
Transformerless
Smart cooling
IP65
2000m without derating
0~100%

470/754/270 mm
48kg
-25 °C ... +60 °C (with derating above 45°C)
≤ 40 dB(A)
<1W
Transformerless
Smart cooling
IP65
2000m without derating
0~100%

470/754/270 mm
48kg
-25 °C ... +60 °C (with derating above 45°C)
≤ 40 dB(A)
<1W
Transformerless
Smart cooling
IP65
2000m without derating
0~100%

特點 Features

顯示	Display
通訊接口	Interfaces: RS232/R485/WiFi/LAN/GPRS
質保期: 5年/10年	Warranty: 5 years / 10 years

Graphic LCD
yes / yes / opt / opt / opt
yes / opt

Graphic LCD
yes / yes / opt / opt / opt
yes / opt

Graphic LCD
yes / yes / opt / opt / opt
yes / opt

認證許可 Certificates and Approvals

IEC 62109, CE, G59, VDE 026-1-1, CQC



輸入數據(直流) Input Data

	Growatt 30000TL3	Growatt 33000TL3	Growatt 40000TL3
最大直流輸入功率 Max recommended PV Power (for module STC)	37500W	41250W	50000W
最大直流輸入電壓 Max DC voltage	1000V	1000V	1000V
啟動電壓 Start Voltage	250V	250V	250V
直流輸入電壓範圍 PV voltage range	200V - 1000V	200V - 1000V	200V - 1000V
正常電壓 Nominal voltage	580V	580V	695V
滿載MPP電壓範圍 Full load MPP voltage range	450V - 800V	450V - 800V	550V - 800V
最大輸入電流 Max. input current	34A/34A	38A / 38A	38A / 38A
每串最大輸入電流 Max. input current per string	12A	12A	12A
追蹤器數量/ 每追蹤器併數 Number of MPP trackers / strings per MPP tracker	2/4	2/4	2/4
最大直流比, 依電壓電流 Max.DC ratio, depending on V,A	1.1~1.3	1.1~1.3	1.1~1.25

輸出數據(交流) Output (AC)

額定交流輸出功率 Rated AC output power	30KW	33KW	40KW
最大交流視在功率 Max. AC apparent power	30KVA	33KVA	40KVA
最大交流輸出電流 Max. output current	44A	48A	48A
額定交流輸出電壓 AC nominal voltage	230V/400V	230V/400V	277V/480V
電網頻率 AC grid frequency	50/60Hz	50/60Hz	50/60Hz
功率因數 Power factor	0.8 leading - 0.8 lagging	0.8 leading - 0.8 lagging	0.8 leading - 0.8 lagging
諧波 THDI	<3%	<3%	<3%
交流電網連接類型 AC grid connection type	3W+N+PE	3W+N+PE	3W+PE

效率 Efficiency

最大效率 Max. efficiency	98.9%	98.9%	99%
歐洲加權效率 Euro - eta	98.4%	98.4%	98.5%
追蹤器效率 MPPT efficiency	99.5%	99.5%	99.5%

設備保護 Protection Devices

直流極性反接保護 DC reverse polarity protection	yes	yes	yes
直流輸入開關 DC Switch for each MPPT	yes	yes	yes
直流突波保護 DC Surge protection	Class II	Class II	Class II
接地故障檢測 Ground fault monitoring	yes	yes	yes
短路輸出保護 Output short circuit protection	yes	yes	yes
交流突波保護 AC Surge protection	Class II	Class II	Class II

常規數據 General Data

尺寸(寬/高/深) Dimensions (W / H / D)	440/660/270 mm	440/660/270 mm	440/660/270 mm
重量 Weight	46kg	46kg	46kg
運行溫度範圍 Operating temperature range	-25 °C ... +60 °C (with derating above 45°C)	-25 °C ... +60 °C (with derating above 45°C)	-25 °C ... +60 °C (with derating above 45°C)
噪聲指數(典型) Noise emission (typical)	≤ 40 dB(A)	≤ 40 dB(A)	≤ 40 dB(A)
夜間自耗電 Self-Consumption (night)	<1W	<1W	<1W
拓撲結構 Topology	Transformerless	Transformerless	Transformerless
冷卻方式 Cooling concept	Smart cooling	Smart cooling	Smart cooling
防護等級 Environmental Protection Rating	IP65	IP65	IP65
海拔高度 Altitude	2000m without derating	2000m without derating	2000m without derating
相對濕度 Relative Humidity	0~100%	0~100%	0~100%

特點 Features

顯示 Display	Graphic LCD	Graphic LCD	Graphic LCD
通訊接口 Interfaces: RS232/R485/WiFi/LAN/GPRS	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt
質保期: 5年/10年 Warranty: 5 years / 10 years	yes / opt	yes / opt	yes / opt



日燭科技有限公司
JD Auspice Co., Ltd.

