



Datex Intrinsically Safe Data Terminal



AGE-DAT0-008

OVERVIEW

The Datex intrinsically safe keyboard has been designed to meet a wide range of requirements for full function keyboards in hazardous areas. The unit can be supplied as a stand alone system or as components for the OEM to incorporate into his own equipment.

OPTIONAL EXTRAS

Force sensitive mouse button
LCD display 4 x 40 characters 5mm high, 4 x 20 characters
9.8mm high
Panel mount for the OEM

APPLICATIONS

Data input in hazardous areas
Process control
Batch control
Packaging
Maintenance schedules and reporting
Experimental data recording

Dimensions	H	W	D	CUT OUT
Desk Mount	62	400	245	
Panel Mount	195	405	26	361x150
Panel Mount & Mouse	195	490	26	446x150
Power Supply. POU	45	162	108	



AGE-DAT0-006

FEATURES

- Full function compact QWERTY 96 key.
- Sealed membrane construction for harsh environments.
- 316L stainless steel housing (IP65).
- INTRINSICALLY SAFE, galvanically isolated - does not need IS earth.
- Multiple protocols - PC/AT, RS232.
- Twin twisted pair connection over distances up to 400m.

Desk Mount Model

Model No	Description
AGE-DATO-001	KEYBOARD ONLY
AGE-DATO-004	KEYBOARD & MOUSE BUTTON
AGE-DATO-008	KEYBOARD & DISPLAY
AGE-DATO-010	KEYBOARD & DISPLAY & MOUSE BUTTON

Panel Mount Model

Model No	Description
AGE-DATO-006	KEYBOARD ONLY
AGE-DATO-012	KEYBOARD & MOUSE BUTTON



AGE-DAT0-019
(AGE-DATO-004 ADAPTED TO FOLD AWAY TRAY)



Technical Specification Datex Intrinsically Safe Data Terminals

■ SAFE AREA

The safe area interface unit (PDU) is a single card, which provides an intrinsically safe interface for power and data to the hazardous area. It handles the communication with the host computer.


■ TECHNICAL DESCRIPTION

The Datex intrinsically safe data terminal system provides a means to input data in a hazardous area and gives the operator feedback from the host computer via a text display.

The system can interface with various types of computer in the safe area and provide a range of devices in the hazardous area.

■ HAZARDOUS AREA

The field data terminal is intrinsically safe and may be located and operated in a hazardous area. It can combine keyboard, pointing device or text display functions to suit a variety of applications. It receives the power and data from the safe area via the PDU.

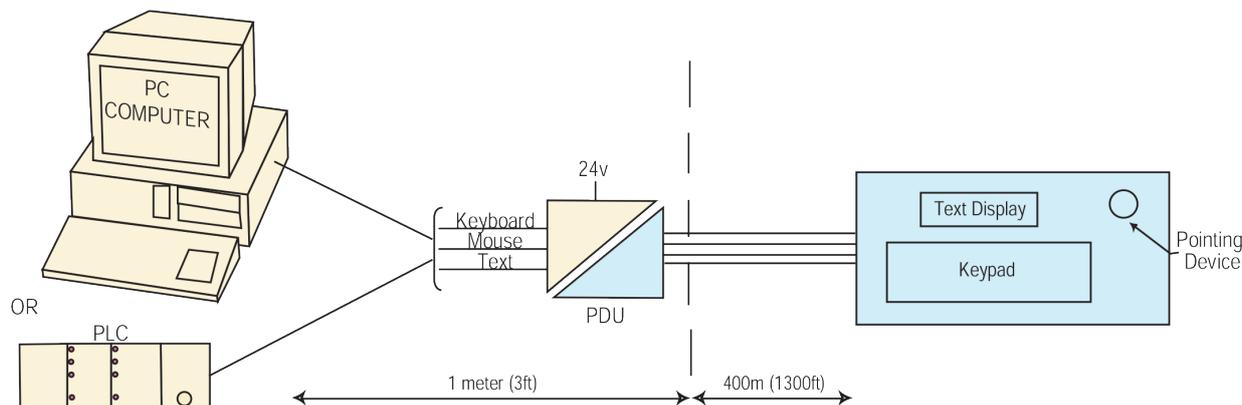

CE 0518	
Certificates	[EEx ia] IIC T4 EN 50020 SIRA01ATEX2088
Power supply	24Vdc 300mA Galvanic isolation No IS earth needed
Dimensions	
In housing	162 x 108 x 45mm (IP40)
Card alone	160 x 100 x 32mm
Data format	
Keyboard	IBM PC/AT and PS/2 format or RS232 output ASCII Codes 1200, 2400, 4800 or 9600 baud (switch selectable) 8 bit, no parity
Pointing device	Microsoft® mouse format RS232
Display data	RS232 input of ASCII codes, 1200, 2400, 4800 or 9600 baud, 8 bits, no parity.
Electromagnetic compatibility	When the units are supplied in an enclosure and connected in accordance with operating instructions, the system conforms with EN 50081-1 and EN 50082-1

CE 0518	
Certificates	[EEx ia] IIC EN 50020 SIRA01ATEX2089
Power supply	From PDU
Dimensions	See tabulation
Connection to safe area	Power + data (2 x twisted pair), screened cable Maximum cable resistance 15 ohm per pair Maximum cable capacitance 620nF Typical maximum distance 400 m
Keypad	96 key fully sealed tactile membrane keypad. US English QWERTY layout
Force sensitive mouse button	IP65 sealed force sensitive mouse button with left and right mouse buttons. Cursor speed is proportional to and in the direction of the force applied.
Text display (optional)	4 line x 40 character per line LCD text display. Character height is 5mm (3/16") or large character 9.8mm (3/8") 4 x 20 display. Supertwist LCD technology for maximum viewing angle.
Datex is available in a variety of enclosures to accommodate the options required for the application.	