










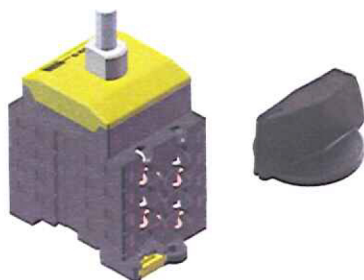


Switch disconnecter for solar application according to IEC 60947-1&3 by Dekra (KEMA) and CCC (CQC)



Terminals Scheme						
Layer No.	Front Side		Symbol	Rear Side		On Positions
	Left	Right		Left	Right	1 2 3 4
11	-5			-5		X
10		+5			+5	X
9	+4			+4		X
8		-4			-4	X
7	-3			-3		X
6		+3			+3	X
5	+2			+2		X
4		-2			-2	X
3	-1			-1		X
2		+1			+1	X
1			empty			

Contacts are made in "X" marked position.  
Symbols for interconnection: |

Technical data	Symbol	Merit	Symbol for wire connection	Unit
rated operational voltage (DC poles)	Ue		1000	V dc
rated operational current (DC poles)	Ie		16	A dc
rated operational voltage (second rating DC poles, if requested)	Ue		850	V dc
rated operational current (second rating DC poles, if requested)	Ie		20	A dc
rated operational voltage (third rating DC poles, if requested)	Ue		800	V dc
rated operational current (third rating DC poles, if requested)	Ie		25	A dc
rated operational voltage (fourth rating DC poles, if requested)	Ue		650	V dc
rated operational current (fourth rating DC poles, if requested)	Ie		32	A dc
method of mounting	both bottom and single hole mounting [D]			
number of DC poles			10	
utilization category DC				
actuator	standard black [A]			
positions	OFF at 12 hr, ON at 3 hr [E]			
rated impulse withstand voltage	Uimp		8	kV
insulation voltage	Ui		1000	V
rated thermal current uninterrupted duty	Iu		25	A
rated short-time withstand current (1s)	Icw		750	A
rated short-circuit making capacity	Icm		1,4	kA
rated conditional short-circuit current			5	kA
method of operation	independent manual operation			
minimum required dimensions of enclosures L x W x H* (on DIN-rail H = +2mm) (space envelope)			124 x 47 x 147,6	mm
* see the drawing for the height of the switch. The number of layers N is:			11	
knob operation force		max.	1,4	Nm
tightening torque terminal screws M4 , min. - max.		1,5	1,7	Nm
tightening torque panel mounting nut, min. - max.		2,0	2,5	Nm
tightening torque M3 screw in the standard black knob, min. - max.		0,5	0,7	Nm
ambient temperature allowed between			- 25 to + 70	°C
storage temperature allowed between			- 40 to + 80	°C
maximum relative humidity, without condensation at 20 °C			90	%
pollution degree			2	
IP rating terminals			IP20	
IP rating gland of the shaft in case of single hole panel mounting			IP65	
rated operational voltage (AC poles)	Ue			V ac
rated operational current (AC poles)	Ie			A ac
number of AC poles (for general use)				
minimum required fine wire cross-section: IEC60947-1, table 9				mm <sup>2</sup>
auxiliary contact(s), AC15			No auxiliary contact	
auxiliary contact ratings				
weight			453	g
accessories:				

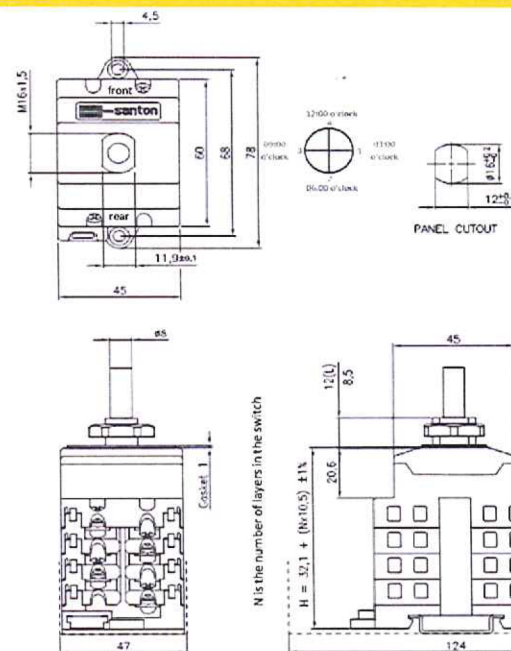

### Mounting Instructions

In the application all ratings according to the datasheet have to be respected. After mounting, the wiring must be checked and the switch must operate smoothly. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards.

## Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85 °C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Connection details						
Description	Symbol	Values				Unit
Rated operational current (DC poles)	le	16	20	25	32	A dc
Required fine wire cross-section (minimal): IEC60947-1, table 9	A	2,5	4	4	6	mm²
max power dissipation	P	2,4	3,8	5,9	9,7	W

The terminals, without interconnection can take copper wires up to 6 mm<sup>2</sup>.

The recommended Spade Tongue Terminals may have a maximum width of 9 mm.

For CSA and UL applications, registered Spade Tongue Terminals must be used.

The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco).

Registered Spade Tongue Terminals	Type number	Wire size (AWG)	Wire size (mm <sup>2</sup> )	Color
JST	PVD2-Y54A	AWG 16 – AWG 14	1,0 – 2,5 mm <sup>2</sup>	Blue
TE connectivity	C-165012	AWG 16 – AWG 14	1,0 – 2,5 mm <sup>2</sup>	Blue
Vogt	3635c	AWG 16 – AWG 14	1,5 – 2,5 mm <sup>2</sup>	Blue
TE connectivity	C-165015	AWG 12 · AWG 10	3,0 · 6,0 mm <sup>2</sup>	Yellow
Vogt	3652c / 3653c	AWG 12 · AWG 10	3,0 · 6,0 mm <sup>2</sup>	Yellow
Santoni (JST)	52A1256.35	AWG 8 · AWG 10	10,5mm <sup>2</sup> - 16mm <sup>2</sup> +1	±4

\*<sup>1</sup> 16mm<sup>2</sup> only with fine stranded wire or two 6mm<sup>2</sup> is also possible

\*2 Optional: A yellow finger safe sleeve for the Spade Tongue Terminal (Santon 52A1256.35) can be ordered under item number 52A1564.00

Dimensions, specifications and data shown are be subject to change without notice.