




## Surge Protective Devices – TYPE 1 SPD D150/180-VG-R

Type 1 surge protective device especially designed for low-voltage power supply system at the boundaries from lightning protection zone 1-2 and higher.

- Type 1CA surge arrester, passed intermediate current 100A, 500A, 1000A and short circuit current rating (SCCR) 200kA without external fuse or circuit breaker.
- ETL certified surge protector according to UL1449-4th
- Pluggable design with window fault indication
- Nominal discharge current In 20kA 8/20 per pole, max discharge current I<sub>max</sub> 50kA 8/20 per pole
- High reliability due to global patented thermally protected MOV (TMOV) with special arc-extinguish device

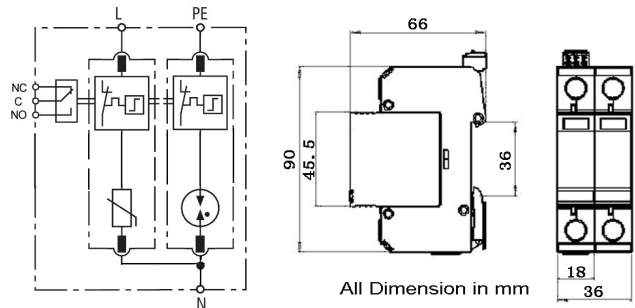

Part No.		D1-50/150-VG-R	D1-50/180-VG-R	D1-50/250-VG-R	D1-50/275-VG-R	D1-50/320-VG-R	D1-50/420-VG-R	D1-50/550-VG-R
In accordance with		UL1449-4th						
Category IEC/VDE		Type1CA						
Max. continuous operating voltage (MCOV)	L – N (VAC/VDC)	150 /200	180 /240	250 /330	275 /370	320 /420	420 /560	550 /710
	N-PE(VAC)	150	150	255	255	255	255	255
Nominal discharge current(8/20) In	L-N	20kA						
	N-PE	20kA						
Nominal discharge current(8/20) In	L-N	50kA						
	N-PE	50kA						
Voltage protection rating	VPR(L-N)	<0.7kV	<0.7kV	<1.0kV	<1.0kV	<1.0kV	<1.2kV	<1.5kV
	VPR(N-PE)	<1.2kV	<1.2kV	<1.5kV	<1.5kV	<1.5kV	<1.5kV	<1.5kV
Response time	L-N	≤25 ns						
	N-PE	≤100 ns						
Follow current	L-N	No						
	N-PE	100Arms@Uc						
Backup fuse(only required if not already provided in mains)		125A gL/gG						
Operating temperature range		- 40°C ~ + 80°C						
Cross-section of connection wire		Single-strand 35mm <sup>2</sup> ; multi-strand 25mm <sup>2</sup>						
Mounting		35mm DIN-rail in accordance with EN 50022/DIN46277-3						
Enclosure material		thermoplastic; extinguishing degree UL94 V-0						
Degree of protection		IP20						
Installation width		2 modules, DIN 43880						
Thermal disconnecto		Internal green – normal ; red - failure						
Remote alarm contact		“-R” means with remote alarm contact						
SCCR rating		200kA						
Approvals, Certifications		ETL/CE						
Additional data for Remote Alarm Contacts								
Remote alarm contact type		Isolated Form C						
Switching capability Un/In		AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A						
Max. Size of connecting wire		Max. 1.5mm <sup>2</sup> (or # 16AWG)						