



● 產品外觀及設計性能參數 Product appearance and technical parameters


產品型號 Product Model	外觀 Appearance
QC-Y	
QC-R	
QC-T	
QC-X	
QC-M	



性能參數Performance Parameters		
名稱 Product Name	分支連接器 Branch cable	
本體材質 Body Materials	TPV	
額定電壓 Rated Current	參考所搭配連接器的電流 Refer to the current of the matching connector	
適用電纜 Applicable Cable	規格一 Specification 1	4mm ² 、6mm ² 、10mm ²
	規格二 Specification 2	12AWG、10AWG、8AWG
防護等級 IP degree	IP68 (1m, 1h) /IP65	
連接器型號 Connector Type	QC4.10-1000V/QC4.10-1500V/QC4.10-PLUS/ MC4/MC4-EVO2....	
連接器配置 Connector Configuration	QC4.10, MC4	
電纜長度 Cable Length	L1=100mm/L2=customized	
溫度範圍 Temperature Range	-40°C ~ +85°C	
溫度上限 Temperature Upper	105°C	
過電壓類別 Overvoltage Class	Ⅲ	
污染等級 Class Of Pollution	I	
接觸電阻 Resistance Of Connector	MAX:5mΩ	
額定脈衝電壓 Rated Pulse Voltage	16KV	
阻燃等級 Flame Retardant Rating	UL94: V-0	



● 圖檔 Drawing

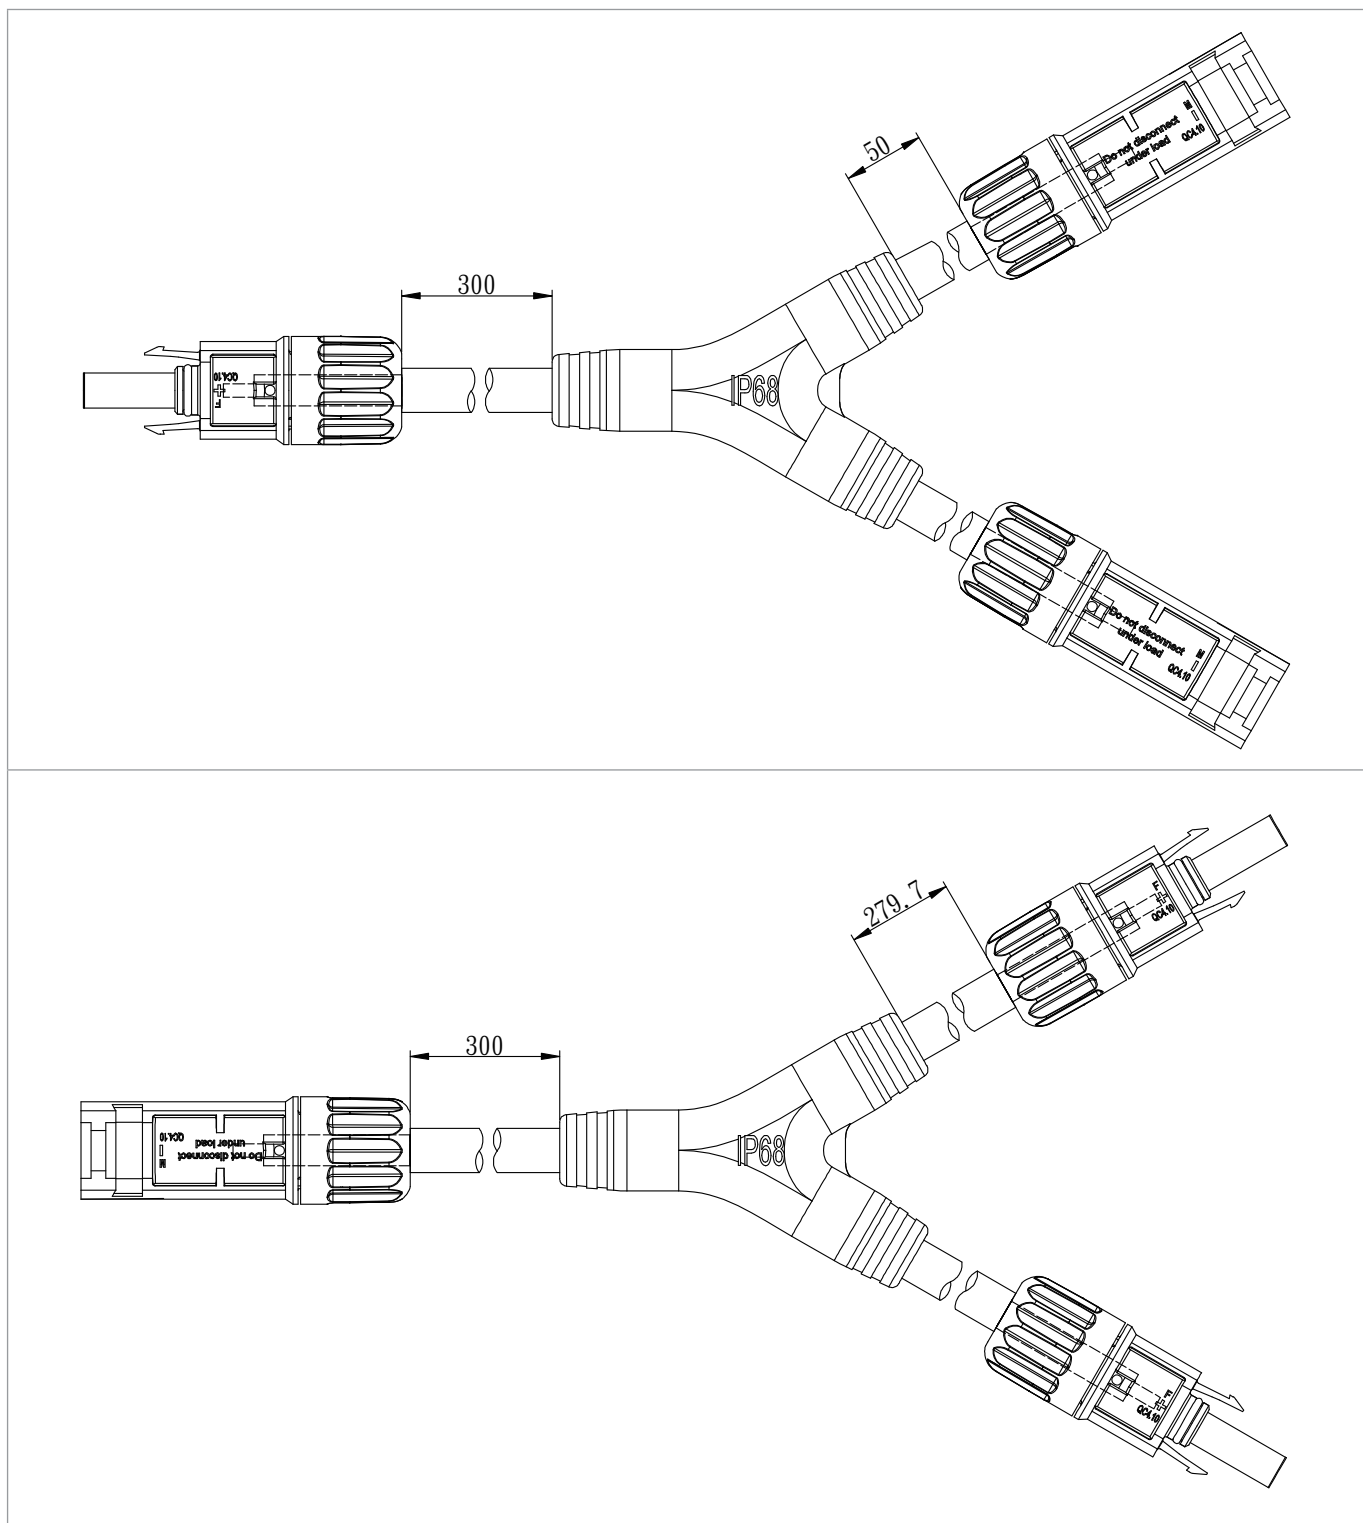

註：本文件如有更改，恕不另行通知。

Note: This document is subject to change without notice.